

## Hydroproof LED G3 DALI

### HYDROPROOF LED G3 600mm Twin 4K DALI

#### 0048772



#### Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, DALI dimmable, 4000K, CRI80, 2800 lm, 19 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



### PRODUCT OVERVIEW

IPC Code	0048772
Product name	HYDROPROOF LED G3 600mm Twin 4K DALI
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC000109
E-number FI	4306984
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	19
Electrical protection	Class I
Control gear type	Electronic dimmable DALI
Dimmable	Yes
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487724
Lamps	Yes
Included lamp	INTEGRATED LED

## Hydroproof LED G3 DALI

*HYDROPROOF LED G3 600mm Twin 4K DALI*  
0048772

### DATA TABLE

#### General data

IPC Code	0048772
Product name	HYDROPROOF LED G3 600mm Twin 4K DALI
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +40°C
Certifications	EUNEW009
ETIM Class	EC000109
E-number FI	4306984

#### Optical data

Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	19
Mains voltage (V)	220-240V~
Mains frequency (Hz)	0/50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic dimmable DALI
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	300
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	DC/50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

## Hydroproof LED G3 DALI

### HYDROPROOF LED G3 600mm Twin 4K DALI

### 0048772

#### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

#### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Clear
Diffuser material	PMMA
Nominal Product Length (mm)	665
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	1.18


#### Packaging

Single packaging type	Carton
Product EAN number	5410288487724
Packaging single length / height (cm)	77.5
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487724
Units per outer package	1
Packaging outer length / height (cm)	77.5
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

#### Safety data

Dry applications use only	No
---------------------------	----

## PHOTOMETRY

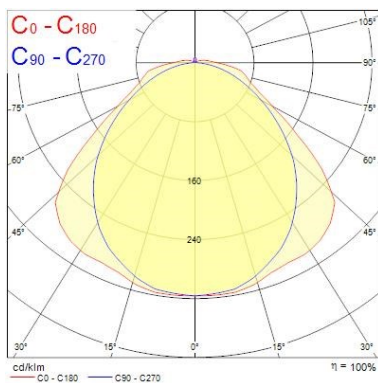

Distance [m]	Cone diameter [m]	E <sub>0°</sub> [lx]	E <sub>10°</sub> [lx]	E <sub>30°</sub> [lx]	E <sub>45°</sub> [lx]	E <sub>60°</sub> [lx]	E <sub>75°</sub> [lx]	E <sub>90°</sub> [lx]
0.5	1.21 1.48	3570	654	314				
1.0	2.42 2.97	896	176	79				
1.5	3.63 4.45	398	82	36				
2.0	4.84 5.93	224	50	23				
2.5	6.04 7.41	143	31	15				
3.0	7.25 8.90	98	21	10				

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 112.0°)


— C90 - C270 (Half beam angle: 100.0°)


## Hydroproof LED G3 DALI *HYDROPROOF LED G3 600mm Twin 4K DALI* 0048772

### TECHNICAL DRAWINGS




**SYLVANIA** 0048772

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

## Hydroproof LED G3 DALI *HYDROPROOF LED G3 600mm Twin 4K DALI* 0048772

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0048772

874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED

EUROPEAN UNION

Detailed description: The image shows a rectangular energy label with a blue border. On the left, there is a blue icon of a lamp. To its right, the text reads 'This luminaire contains built in LED lamps.' Below this, a white box contains the text 'The lamps cannot be changed in the luminaire.' In the center, there is a vertical energy efficiency scale with seven colored arrows pointing right, labeled A++, A+, A, B, C, D, and E from top to bottom. A large red 'X' is drawn over the B, C, D, and E categories. To the right of the scale, a blue bracket groups the A++, A+, and A categories, with the letters 'L', 'E', and 'D' stacked vertically next to it. In the top right corner of the label is the European Union flag. At the bottom left, the 'SYLVANIA' logo is printed in green, followed by the product code '0048772'. At the bottom right, the code '874/2012' is printed.