

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI

0048778



Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1278 mm x W 110 mm x H 78 mm size, GRP housing, PMMA diffuser, DALI dimmable, 4000K, CRI80, 5550 lm, 36 W, 154 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



PRODUCT OVERVIEW

| | |
|---------------------------------|--|
| IPC Code | 0048778 |
| Product name | HYDROPROOF LED G3 1200mm Twin 4K DALI |
| Technology | LED |
| Housing | GRP |
| Mount | Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting |
| General application | Logistics & Industry |
| Certifications | EUNEW009 |
| ETIM Class | EC000109 |
| E-number FI | 4306986 |
| Fixture luminous flux (lm) | 5550 |
| Luminaire efficacy (lm/W) | 154 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 100 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 36 |
| Electrical protection | Class I |
| Control gear type | Electronic dimmable DALI |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Average life (Nominal) (h) | 50000 |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK02 |
| Product EAN number | 5410288487786 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

DATA TABLE

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI

0048778

General data

| | |
|----------------------------------|--|
| IPC Code | 0048778 |
| Product name | HYDROPROOF LED G3 1200mm Twin 4K DALI |
| Technology | LED |
| Housing | GRP |
| Mount | Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting |
| General application | Logistics & Industry |
| Operating temperature range (°C) | -20°C to +40°C |
| Certifications | EUNEW009 |
| ETIM Class | EC000109 |
| E-number FI | 4306986 |

Optical data

| | |
|---------------------------------|---------------|
| Fixture luminous flux (lm) | 5550 |
| Luminaire efficacy (lm/W) | 154 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 100 |
| Distribution type | Direct |
| Photobiological Risk Group | RG1 |

Electrical data

| | |
|-----------------------------------|--------------------------|
| Total power consumption (W) | 36 |
| Mains voltage (V) | 220-240V~ |
| Mains frequency (Hz) | 0/50/60Hz |
| Electrical protection | Class I |
| Control gear required | No |
| Control gear type | Electronic dimmable DALI |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 300 |
| Inrush Current (A) | 29 |
| Inrush Duration (µs) | 180 |
| Glow Wire Test (°C) | 650 |
| Nominal Frequency (Hz) | DC/50/60Hz |
| Max. Luminaires per 10A C Breaker | 21 |
| Max. Luminaires per 13A C Breaker | 28 |
| Max. Luminaires per 16A C Breaker | 36 |
| Max. Luminaires per 20A C Breaker | 45 |
| Max. Luminaires per 10A B Breaker | 13 |
| Max. Luminaires per 13A B Breaker | 17 |
| Max. Luminaires per 16A B Breaker | 22 |
| Max. Luminaires per 20A B Breaker | 27 |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 60000 |
|-----------------------------|-------|

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI

0048778

| | |
|-----------------------------|-------|
| Lumen maintenance - L80 B10 | 60000 |
| Lumen maintenance - L90 B50 | 60000 |
| Average life (Nominal) (h) | 50000 |

Physical data

| | |
|-----------------------------|-------|
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK02 |
| Diffuser finish | Clear |
| Diffuser material | PMMA |
| Nominal Product Length (mm) | 1278 |
| Nominal Product Width (mm) | 110 |
| Nominal Product Height (mm) | 78 |
| Weight (kg) | 2.03 |

Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288487786 |
| Packaging single length / height (cm) | 137.2 |
| Packaging single width (cm) | 11.6 |
| Packaging single depth (cm) | 8.4 |
| DUN14 (outer) | 05410288487786 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 137.2 |
| Packaging outer width (cm) | 11.6 |
| Packaging outer depth (cm) | 8.4 |

Safety data


| | |
|---------------------------|----|
| Dry applications use only | No |
|---------------------------|----|

PHOTOMETRY

| Distance [m] | Cone diameter [m] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|-------|--------|-------|
| 0.5 | 1.25 1.41 | 7432 | 903 | 725 |
| 1.0 | 2.51 2.81 | 1858 | 226 | 181 |
| 1.5 | 3.76 4.22 | 826 | 100 | 81 |
| 2.0 | 5.01 5.63 | 466 | 56 | 45 |
| 2.5 | 6.26 7.04 | 297 | 36 | 29 |
| 3.0 | 7.52 8.44 | 208 | 25 | 20 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 105.2°)
— C90 - C270 (Half beam angle: 102.8°)

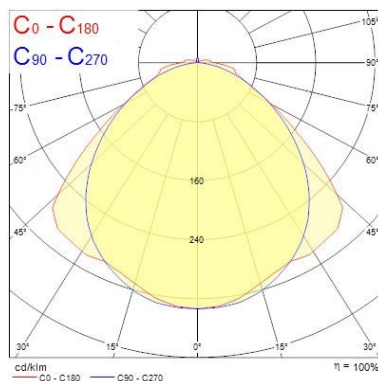


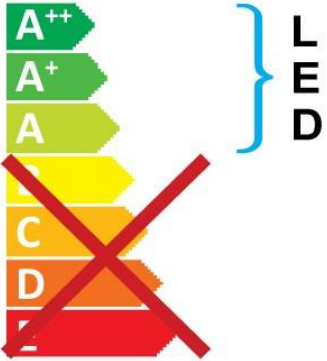
TECHNICAL DRAWINGS

Hydroproof LED G3 DALI HYDROPROOF LED G3 1200mm Twin 4K DALI 0048778





SYLVANIA 0048778


 This luminaire contains built in LED lamps.




The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

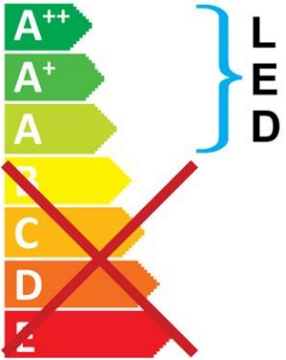

The lamps cannot be changed in the luminaire.

SYLVANIA 0048778 

874/2012



Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI

0048778
