

## Hydroproof LED G3 DALI

### HYDROPROOF LED G3 1500mm Twin 4K DALI

0048797



#### Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, DALI dimmable, 4000K, CRI80, 6900 lm, 47 W, 147 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



#### PRODUCT OVERVIEW

IPC Code	0048797
Product name	HYDROPROOF LED G3 1500mm Twin 4K DALI
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC000109
E-number FI	4306988
Fixture luminous flux (lm)	6900
Luminaire efficacy (lm/W)	147
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	47
Electrical protection	Class I
Control gear type	Electronic dimmable DALI
Dimmable	Yes
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487977
Lamps	Yes
Included lamp	INTEGRATED LED

## Hydroproof LED G3 DALI

*HYDROPROOF LED G3 1500mm Twin 4K DALI*  
0048797

### DATA TABLE

#### General data

IPC Code	0048797
Product name	HYDROPROOF LED G3 1500mm Twin 4K DALI
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +40°C
Certifications	EUNEW009
ETIM Class	EC000109
E-number FI	4306988

#### Optical data

Fixture luminous flux (lm)	6900
Luminaire efficacy (lm/W)	147
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	47
Mains voltage (V)	220-240V~
Mains frequency (Hz)	0/50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic dimmable DALI
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	300
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	DC/50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

## Hydroproof LED G3 DALI

### HYDROPROOF LED G3 1500mm Twin 4K DALI

#### 0048797

#### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

#### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Clear
Diffuser material	PMMA
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.6

#### Packaging

Single packaging type	Carton
Product EAN number	5410288487977
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487977
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

#### Safety data


Dry applications use only	No
---------------------------	----

## PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.19 1.44	3002	1199	837
1.0	2.38 2.88	2280	306	229
1.5	3.58 4.32	1000	133	95
2.0	4.77 5.76	553	75	52
2.5	5.96 7.19	360	48	33
3.0	7.15 8.63	260	33	23

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 110.4°)  
— C90 - C270 (Half beam angle: 100.0°)

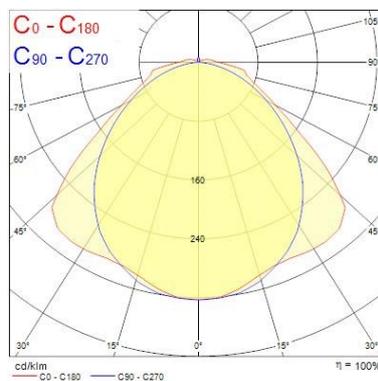

## Hydroproof LED G3 DALI *HYDROPROOF LED G3 1500mm Twin 4K DALI* 0048797

### TECHNICAL DRAWINGS



**SYLVANIA** 0048797

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

## Hydroproof LED G3 DALI

HYDROPROOF LED G3 1500mm Twin 4K DALI

0048797

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0048797 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED