


## Hydroproof LED G3 Emergency HYDROPROOF LED G3 1200mm Single 4K E3 0048783



### Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, Non dimmable, 3 hour emergency, 4000K, CRI80, 4000 lm, 28 W, 142 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.

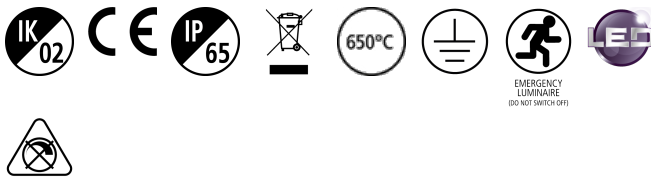

### PRODUCT OVERVIEW

IPC Code	0048783
Product name	HYDROPROOF LED G3 1200mm Single 4K E3
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	142
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	290
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	Electronic + Emergency
Dimmable	No
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487830
Luminous flux (emergency) (lm)	290
Lamps	Yes
Included lamp	INTEGRATED LED

## Hydroproof LED G3 Emergency

*HYDROPROOF LED G3 1200mm Single 4K E3*  
0048783

### DATA TABLE

#### General data

IPC Code	0048783
Product name	HYDROPROOF LED G3 1200mm Single 4K E3
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C to +30°C
Certifications	EUNEW002
ETIM Class	EC000109

#### Optical data

Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	142
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	290
Emergency duration (h)	3

#### Electrical data

Total power consumption (W)	28
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic + Emergency
Dimmable	No
Drive current (mA)	300
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz

#### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

#### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Clear

## Hydroproof LED G3 Emergency HYDROPROOF LED G3 1200mm Single 4K E3 0048783

Diffuser material	PMMA
Nominal Product Length (mm)	1278
Nominal Product Width (mm)	84
Nominal Product Height (mm)	75
Weight (kg)	2.04


### Packaging

Single packaging type	Carton
Product EAN number	5410288487830
Packaging single length / height (cm)	137.2
Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487830
Units per outer package	1
Packaging outer length / height (cm)	137.2
Packaging outer width (cm)	8.8
Packaging outer depth (cm)	8.4

### Safety data


Dry applications use only	No
---------------------------	----

## PHOTOMETRY

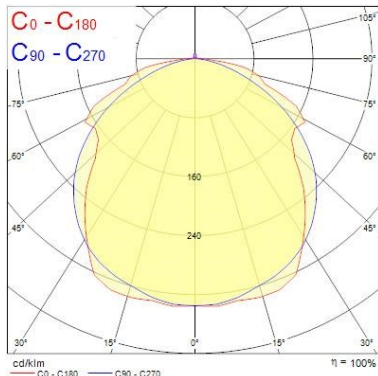

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.48 1.78	5266	464	307
1.0	2.95 3.58	1314	116	77
1.5	4.43 5.37	584	50	34
2.0	5.91 7.16	338	29	19
2.5	7.38 8.95	210	19	12
3.0	8.85 10.74	148	13	9

Distance [m] Cone diameter [m]  
 — C0 - C180 (Half beam angle: 121.0°)  
 — C90 - C270 (Half beam angle: 111.8°)  
 Illuminance [lx]

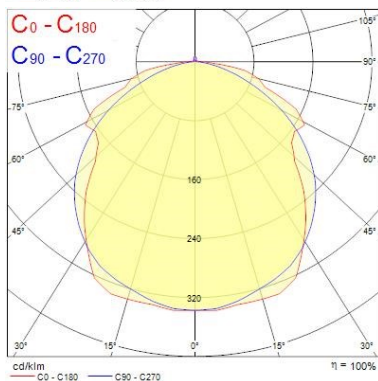

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.46 1.77	387	338	22
1.0	2.92 3.53	97	84	6
1.5	4.38 5.30	42	36	3
2.0	5.84 7.07	24	20	1
2.5	7.30 8.84	15	13	1
3.0	8.75 10.50	11	9	1


Distance [m] Cone diameter [m]  
 — C0 - C180 (Half beam angle: 121.0°)  
 — C90 - C270 (Half beam angle: 111.2°)  
 Illuminance [lx]


## Hydroproof LED G3 Emergency *HYDROPROOF LED G3 1200mm Single 4K E3* 0048783

### TECHNICAL DRAWINGS




**SYLVANIA** 0048783

 This luminaire contains built in LED lamps.

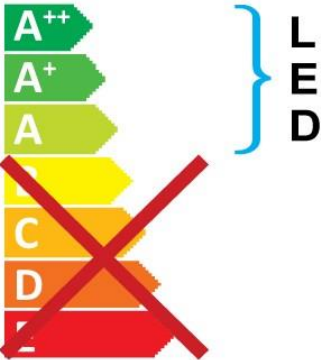

The lamps cannot be changed in the luminaire.

874/2012 

## Hydroproof LED G3 Emergency *HYDROPROOF LED G3 1200mm Single 4K E3* 0048783

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0048783 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED