

Hydroproof LED G3 Emergency


HYDROPROOF LED G3 1500mm Twin 4K E3

0048803



Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, Non dimmable, 3 hour emergency, 4000K, CRI80, 6900 lm, 49 W, 140 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK02, IP65.



PRODUCT OVERVIEW

IPC Code	0048803
Product name	HYDROPROOF LED G3 1500mm Twin 4K E3
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109
Fixture luminous flux (lm)	6900
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	230
Total power consumption (W)	49
Electrical protection	Class I
Control gear type	Electronic + Emergency
Dimmable	No
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288488035
Luminous flux (emergency) (lm)	230
Lamps	Yes
Included lamp	INTEGRATED LED

Hydroproof LED G3 Emergency

HYDROPROOF LED G3 1500mm Twin 4K E3
0048803

DATA TABLE

General data

IPC Code	0048803
Product name	HYDROPROOF LED G3 1500mm Twin 4K E3
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C to +30°C
Certifications	EUNEW002
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	6900
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	230
Emergency duration (h)	3

Electrical data

Total power consumption (W)	49
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic + Emergency
Dimmable	No
Drive current (mA)	300
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Clear
Diffuser material	PMMA

Hydroproof LED G3 Emergency HYDROPROOF LED G3 1500mm Twin 4K E3 0048803

Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.88


Packaging

Single packaging type	Carton
Product EAN number	5410288488035
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288488035
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

Safety data

Dry applications use only	No
---------------------------	----

PHOTOMETRY

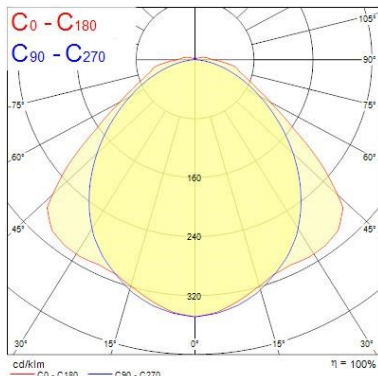


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.10 1.38	329	47.8°	54.1°	329
1.0	2.21 2.76	82	47.8°	54.1°	82
1.5	3.31 4.14	37	47.8°	54.1°	37
2.0	4.41 5.53	21	47.8°	54.1°	21
2.5	5.51 6.91	13	47.8°	54.1°	13
3.0	6.62 8.29	9	47.8°	54.1°	9

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 108.2°)
C90 - C270 (Half beam angle: 95.6°)

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.19 1.44	889	60.0°	65.2°	889
1.0	2.38 2.88	222	60.0°	65.2°	222
1.5	3.57 4.32	96	60.0°	65.2°	96
2.0	4.77 5.76	56	60.0°	65.2°	56
2.5	5.96 7.19	35	60.0°	65.2°	35
3.0	7.15 8.63	24	60.0°	65.2°	24

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 110.4°)
C90 - C270 (Half beam angle: 100.0°)

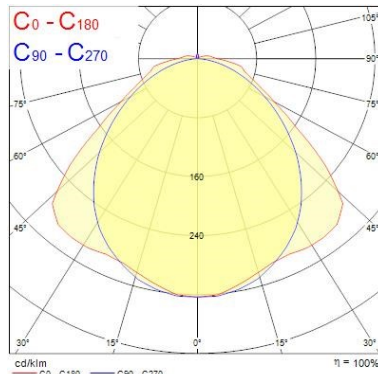


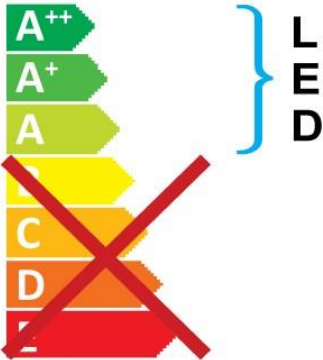
Hydroproof LED G3 Emergency *HYDROPROOF LED G3 1500mm Twin 4K E3* 0048803

TECHNICAL DRAWINGS




SYLVANIA 0048803

 This luminaire contains built in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012 

Hydroproof LED G3 Emergency *HYDROPROOF LED G3 1500mm Twin 4K E3* 0048803

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0048803 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED