

## SylBatten LED


SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3

0045205



### Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP4 = 4 core), sheet steel, 5883LM, 53W, 111lm/W, 6000K, drive current: 350mA, CRI 80, 138° wide beam angle, electronic driver (non dimmable), integral 3 hour maintained emergency, IP20, IK07, 50,000 hrs (L70), (LxWxH) 1205x66x76mm, 5 step MacAdam ellipse, 3kg, white RAL 9016, Class 1, 220-240V, energy class: A++, A+, A.

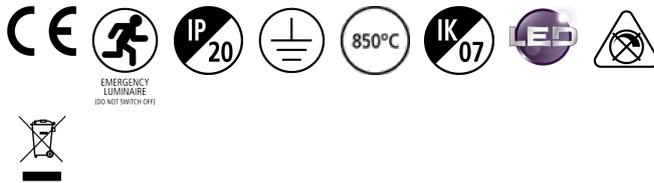

## PRODUCT OVERVIEW

IPC Code	0045205
Product name	SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3
Technology	LED
Housing	Sheet steel
Mount	Surface
Fixture rating	Enclosed
Environment	Internal
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109
Fixture luminous flux (lm)	5883
Luminaire efficacy (lm/W)	106.96
LOR (%)	100
Colour temperature (K)	6000
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Colour Consistency (SDCM)	5
Beam Angle (°)	138
Glare control	31
Photobiological Risk Group	Exempt (Group 0)
Luminous flux (emergency) (lm)	475
Total power consumption (W)	55
Electrical protection	Class I
Control gear type	Electronic
Control gear mounting	Built-in
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Average life (Nominal) (h)	50000
Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288452050

## SylBatten LED

SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3  
0045205

Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	0045205
Product name	SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3
Technology	LED
Housing	Sheet steel
Mount	Surface
Fixture rating	Enclosed
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	0 to +25
Certifications	EUNEW002
ETIM Class	EC000109

#### Optical data

Fixture luminous flux (lm)	5883
Luminaire efficacy (lm/W)	106.96
LOR (%)	100
Colour temperature (K)	6000
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	138
Distribution type	Direct (symmetrical)
Glare control	31
Photobiological Risk Group	Exempt (Group 0)
Luminous flux (emergency) (lm)	475
Emergency duration (h)	3

#### Electrical data

Total power consumption (W)	55
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	10
Electrical protection	Class I
Control gear type	Electronic
Control gear mounting	Built-in
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	33
Inrush Duration (µs)	148
Glow Wire Test (°C)	850

## SylBatten LED

*SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3*  
0045205

Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	19
Max. Luminaires per 13A C Breaker	25
Max. Luminaires per 16A C Breaker	31
Max. Luminaires per 20A C Breaker	38

### Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	30000
Lumen maintenance - L70 B10	15000
Lumen maintenance - L80 B50	30000
Lumen maintenance - L80 B20	30000
Lumen maintenance - L80 B10	15000
Lumen maintenance - L90 B50	15000
Lumen maintenance - L90 B20	15000
Lumen maintenance - L90 B10	15000
Average life (Nominal) (h)	50000

### Physical data

Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1205
Nominal Product Width (mm)	66
Nominal Product Height (mm)	76
Weight (kg)	3.1









### Packaging

Single packaging type	Carton
Product EAN number	5410288452050
Packaging single length / height (cm)	122.0
Packaging single width (cm)	8.0
Packaging single depth (cm)	9.0
DUN14 (outer)	05410288452050
Units per outer package	1
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	9.0

## PHOTOMETRY

## SylBatten LED

SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3  
0045205

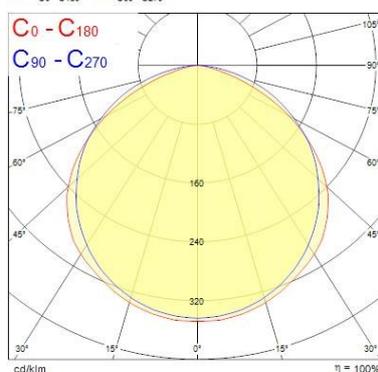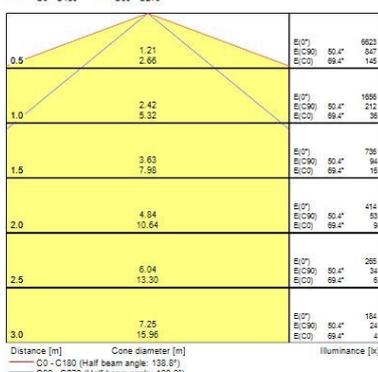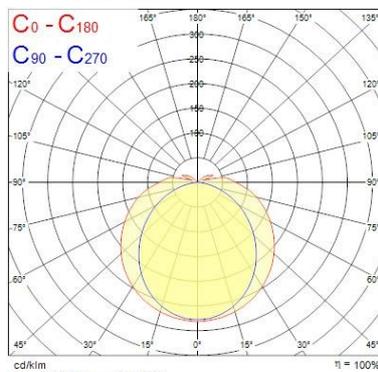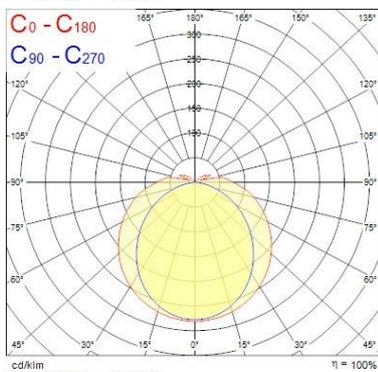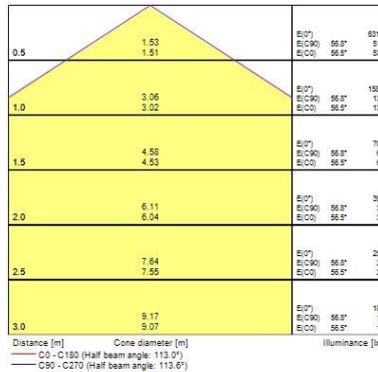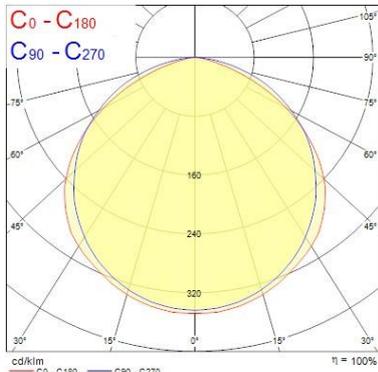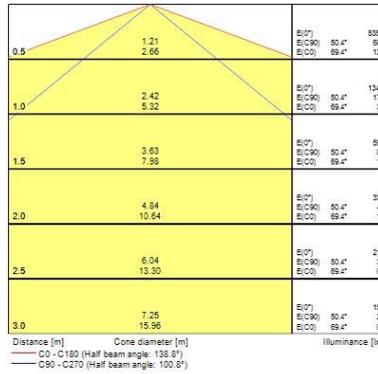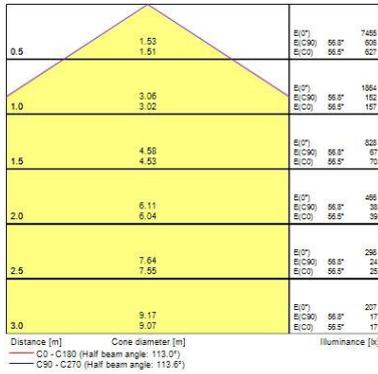

## SylBatten LED

SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3  
0045205

### TECHNICAL DRAWINGS



**SYLVANIA** 0045205

---

This luminaire contains built in LED lamps.

}
L  
E  
D

The lamps cannot be changed in the luminaire.

874/2012

## SylBatten LED

SYLBATTEN LED 1205MM 5500LM 6000K EB (TP4) E3  
0045205

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0045205 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED