

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM  
2069393



### Product features

- PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM is a high performance low glare office luminaire with individually adjustable light pods to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 1200x300mm, White colour - RAL9010. DALI dimmable, 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 3700 lm, total power consumption 25W, efficacy 148lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. Central Battery emergency version. Glow wire test 650°C.



EMERGENCY LUMINAIRE (DO NOT SWITCH OFF)

## PRODUCT OVERVIEW

IPC Code	2069393
Product name	PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW001
ETIM Class	EC002892
E-number FI	4262022
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	148
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	(LED Decor Hub ordered separately)
Control gear mounting	Remote
Dimmable	N
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768693931
Lamps	Yes
Included lamp	INTEGRATED LED

## DATA TABLE

## Pixer Recessed 1200x300

*PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM*  
2069393

### General data

IPC Code	2069393
Product name	PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW001
ETIM Class	EC002892
E-number FI	4262022

### Optical data

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	148
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	25
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear required	No
Control gear type	(LED Decor Hub ordered separately)
Control gear mounting	Remote
Dimmable	N
Drive current (mA)	800
Inrush Current (A)	28
Inrush Duration (µs)	195
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	30
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	46
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	18
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	28

### Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L70 B20	72000
Lumen maintenance - L80 B50	72000

## Pixer Recessed 1200x300

*PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM*  
2069393

Lumen maintenance - L80 B20	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	66000
Lumen maintenance - L90 B10	61000

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	75
Weight (kg)	6.0
Recessed Depth (mm)	150


### Packaging

Single packaging type	Carton
Product EAN number	5025768693931
Packaging single length / height (cm)	132.3
Packaging single width (cm)	33.9
Packaging single depth (cm)	11.6
DUN14 (outer)	05025768693931
Units per outer package	1
Packaging outer length / height (cm)	132.3
Packaging outer width (cm)	33.9
Packaging outer depth (cm)	11.6

### Safety data

Dry applications use only	Yes
---------------------------	-----

## PHOTOMETRY

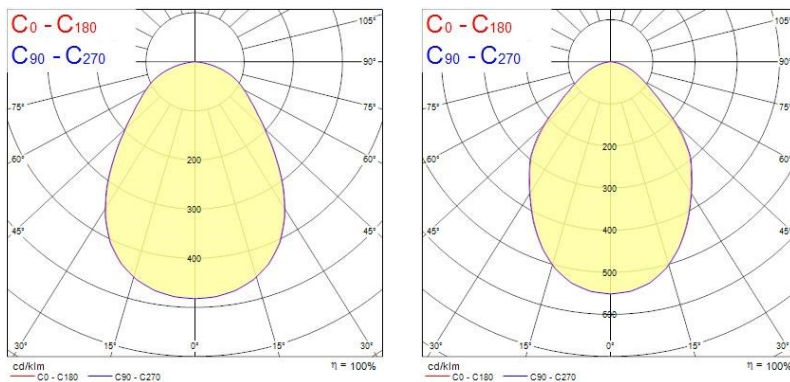

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM  
2069393


Distance [m]	Cone diameter [m]	Beam angle [°]	E <sub>0</sub> ' [lx]	E <sub>1</sub> (C90) [lx]	E <sub>2</sub> (C0) [lx]
0.5	0.89 0.88	82.6° 83.2°	7136 1480	41.7° 41.7°	1508 287
1.0	1.78 1.76	82.6° 83.2°	1784 373	41.7° 41.7°	377 84
1.5	2.66 2.64	82.6° 83.2°	793 166	41.7° 41.7°	168 39
2.0	3.55 3.53	82.6° 83.2°	446 93	41.7° 41.7°	94 21
2.5	4.44 4.41	82.6° 83.2°	255 50	41.7° 41.7°	52 12
3.0	5.33 5.29	82.6° 83.2°	166 41	41.7° 41.7°	42 10

Distance [m]    Cone diameter [m]    Illuminance [lx]  
— C0 - C180 (Half beam angle: 82.6°)  
— C90 - C270 (Half beam angle: 83.2°)


Distance [m]	Cone diameter [m]	Beam angle [°]	E <sub>0</sub> ' [lx]	E <sub>1</sub> (C90) [lx]	E <sub>2</sub> (C0) [lx]
0.5	0.89 0.88	82.6° 83.4°	1208 252	41.7° 41.7°	287 54
1.0	1.78 1.76	82.6° 83.4°	302 63	41.7° 41.7°	84 12
1.5	2.67 2.64	82.6° 83.4°	134 28	41.7° 41.7°	21 4
2.0	3.56 3.51	82.6° 83.4°	78 16	41.7° 41.7°	12 2
2.5	4.45 4.39	82.6° 83.4°	48 10	41.7° 41.7°	7 1
3.0	5.35 5.27	82.6° 83.4°	34 7	41.7° 41.7°	5 1

Distance [m]    Cone diameter [m]    Illuminance [lx]  
— C0 - C180 (Half beam angle: 82.6°)  
— C90 - C270 (Half beam angle: 83.4°)

### TECHNICAL DRAWINGS




## Concord 2069393

 This luminaire contains built in LED lamps.

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

} **LED**

The lamps cannot be changed in the luminaire.

874/2012 

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K DALI CB EM  
2069393

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**Concord** 2069393 874/2012

A++  
A+  
A  
B  
C  
D  
E

LED