Pixer Recessed 1200x300


PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM

2069409



Product features

- PIXER RECESSED 1200x300 HO 4P 4000K SSC01 EM is a high performance low glare office luminaire with individually adjustable light pods to enhance arhitectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 1200x300mm, White colour - RAL9010. SylSmart stand alone office capable, 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 4700 lm, total power consumtion 40W, efficacy 118lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. 3hr maintained emergency lighting. Glow wire test 650°C.



PRODUCT OVERVIEW

IPC Code	2069409
Product name	PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW022
ETIM Class	EC002892
Fixture luminous flux (lm)	4700
Luminaire efficacy (lm/W)	118
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	Dimmable
Control gear mounting	Remote
Dimmable	Y
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768694099
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

© Feilo Sylvania | Date Printed: 29 Nov 2018

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM

2069409

General data

IPC Code	2069409
Product name	PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW022
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	4700
Luminaire efficacy (lm/W)	118
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

Electrical data

Total power consumption (W)	40
Mains voltage (V)	220-240V~
Lamp power factor	0.94
Electrical protection	Class II
Control gear required	No
Control gear type	Dimmable
Control gear mounting	Remote
Dimmable	Y
Drive current (mA)	1200
Inrush Current (A)	28
Inrush Duration (µs)	195
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	30
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	46
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	18
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	28

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L70 B20	72000

© Feilo Sylvania | Date Printed: 29 Nov 2018

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM

2069409

Lumen maintenance - L80 B50	72000
Lumen maintenance - L80 B20	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	66000
Lumen maintenance - L90 B10	61000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	75
Weight (kg)	6.2
Recessed Depth (mm)	150


Packaging


Single packaging type	Carton
Product EAN number	5025768694099
Packaging single length / height (cm)	132.3
Packaging single width (cm)	33.9
Packaging single depth (cm)	11.6
DUN14 (outer)	05025768694099
Units per outer package	1
Packaging outer length / height (cm)	132.3
Packaging outer width (cm)	33.9
Packaging outer depth (cm)	11.6

Safety data

Dry applications use only	Yes

PHOTOMETRY

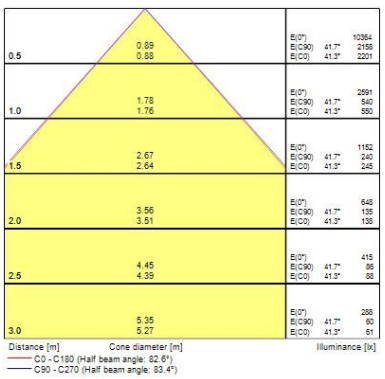

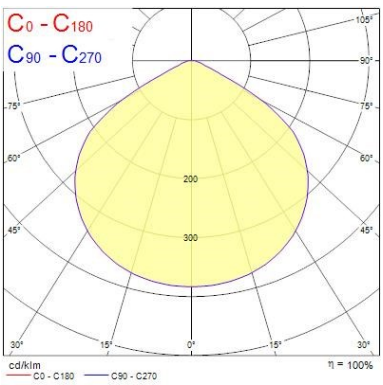



© Feilo Sylvania | Date Printed: 29 Nov 2018

Pixer Recessed 1200x300


PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM


2069409

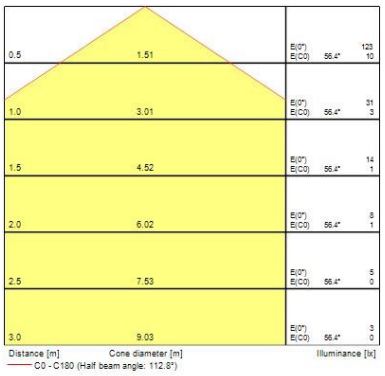

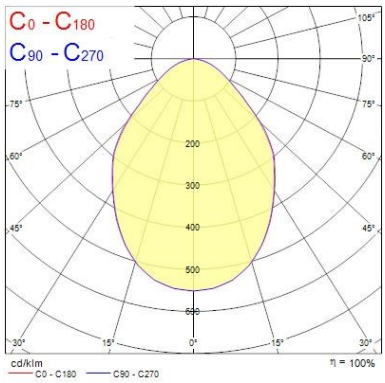

TECHNICAL DRAWINGS



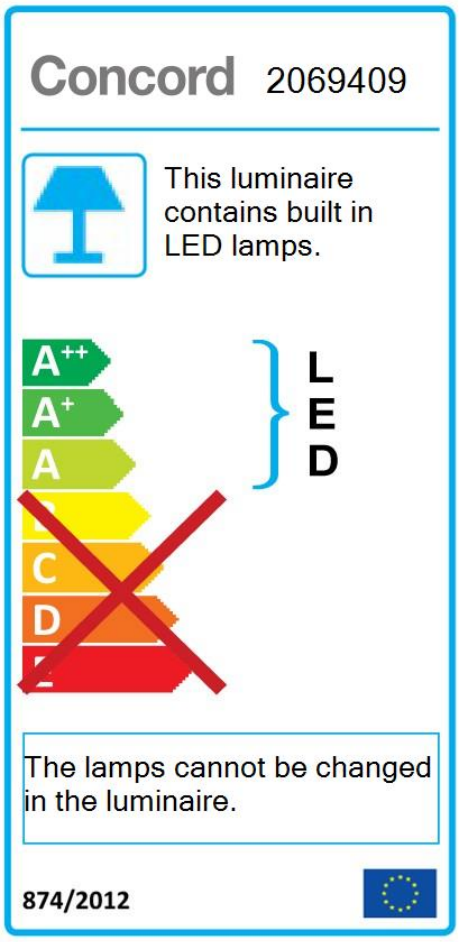


© Feilo Sylvania | Date Printed: 29 Nov 2018

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K SSC01 EM

2069409

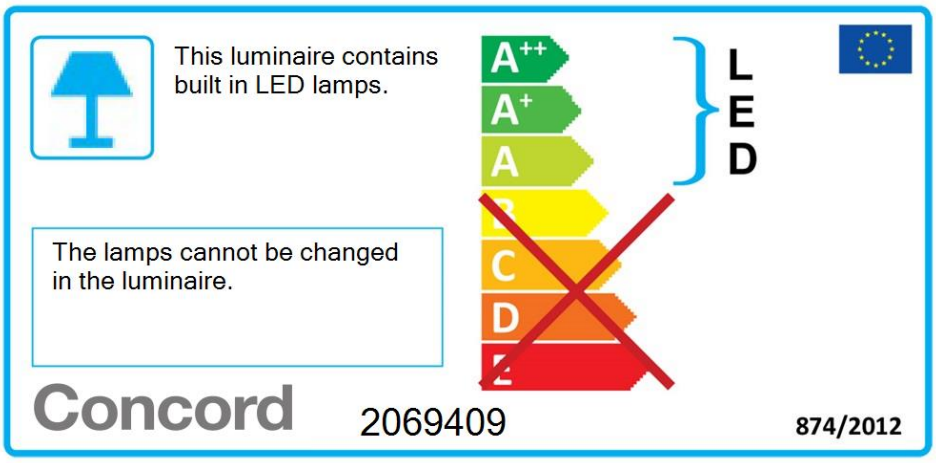

© Feilo Sylvania | Date Printed: 29 Nov 2018