

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM
2069415



Product features

- PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM is a high performance low glare office luminaire with individually adjustable light pods to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 1200x300mm, White colour - RAL9010. DALI dimmable, 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 4150 lm, total power consumption 39W, efficacy 107lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. 3hr maintained emergency lighting. Glow wire test 650°C.



PRODUCT OVERVIEW

IPC Code	2069415
Product name	PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW001
ETIM Class	EC002892
Fixture luminous flux (lm)	4156
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class II
Control gear type	DALI
Control gear mounting	Remote
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768694150
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2069415
Product name	PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM
2069415

Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW001
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	4156
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	39
Mains voltage (V)	220-240V~
Lamp power factor	0.94
Electrical protection	Class II
Control gear required	No
Control gear type	DALI
Control gear mounting	Remote
Drive current (mA)	1200
Inrush Current (A)	28
Inrush Duration (µs)	195
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	30
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	46
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	18
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	28

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L70 B20	72000
Lumen maintenance - L80 B50	72000
Lumen maintenance - L80 B20	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	66000

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM
2069415

Lumen maintenance - L90 B10 61000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	75
Weight (kg)	6.2


Packaging

Single packaging type	Carton
Product EAN number	5025768694150
Packaging single length / height (cm)	132.3
Packaging single width (cm)	33.9
Packaging single depth (cm)	11.6
DUN14 (outer)	05025768694150
Units per outer package	1
Packaging outer length / height (cm)	132.3
Packaging outer width (cm)	33.9
Packaging outer depth (cm)	11.6

Safety data

Dry applications use only	Yes
---------------------------	-----

PHOTOMETRY

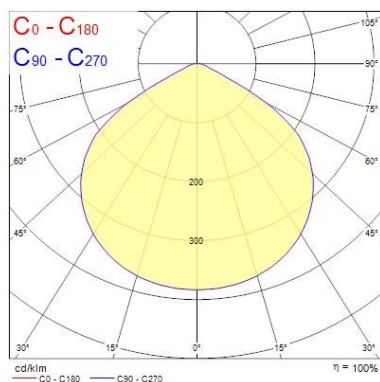

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam area [m²]	Illuminance [lx]
0.5	0.88	82.8°	0.88	0.77	9194
1.0	1.76	82.8°	1.76	3.08	2299
1.5	2.64	82.8°	2.64	6.95	1022
2.0	3.52	82.8°	3.52	12.37	575
2.5	4.40	82.8°	4.40	19.36	388
3.0	5.28	82.8°	5.28	27.71	285


Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM
2069415


0.5	1.51	5(7) E(C0)	95.4"	123 10
1.0	3.01	5(7) E(C0)	95.4"	31 3
1.5	4.52	5(7) E(C0)	95.4"	14 1
2.0	6.02	5(7) E(C0)	95.4"	8 1
2.5	7.53	5(7) E(C0)	95.4"	5 0
3.0	9.03	5(7) E(C0)	95.4"	3 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 112.8°)

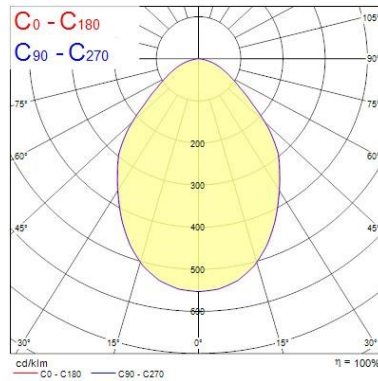

TECHNICAL DRAWINGS



Concord 2069415

This luminaire contains built in LED lamps.

A++

A+

A

B

C

D

E

LED

The lamps cannot be changed in the luminaire.

874/2012

Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HO 4P 4000K9 DALI EM

2069415

