

## Beacon LED Muse II

BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK  
2059730



### Product features

- Integrated LED spotlight, black RAL 9005, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1081lm, luminaire efficacy: 51lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B10, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 1-circuit track adaptor, suitable for Concord Lytespan 1 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x153mm, weight: 0.95kg.



### PRODUCT OVERVIEW

IPC Code	2059730
Product name	BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK
Technology	LED
Housing	ALUMINIUM
Mount	TRACK
General application	Museums & Galleries
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4280884
Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG01
Total power consumption (W)	21
Product Voltage (V)	240
Electrical protection	Class II
Dimmable	Yes
Housing colour	Black - RAL9005
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597307
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

## Beacon LED Muse II

*BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK*  
2059730

### General data

IPC Code	2059730
Product name	BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK
Technology	LED
Housing	ALUMINIUM
Mount	TRACK
General application	Museums & Galleries
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4280884

### Optical data

Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG01

### Electrical data

Total power consumption (W)	21
Mains voltage (V)	230-240V~
Product Voltage (V)	240
Electrical protection	Class II
Dimmable	Yes
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 16A C Breaker	80

### Lifetime data

Lumen maintenance - L70 B50	72000
-----------------------------	-------

### Physical data

Housing colour	Black - RAL9005
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	135
Nominal Product Height (mm)	153
Nominal Product Diameter (mm)	80
Weight (kg)	0.95

## Beacon LED Muse II

BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK  
2059730





### Packaging

Single packaging type	Carton
Product EAN number	5025768597307
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768597307
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### Safety data

Dry applications use only	Yes
---------------------------	-----


## PHOTOMETRY

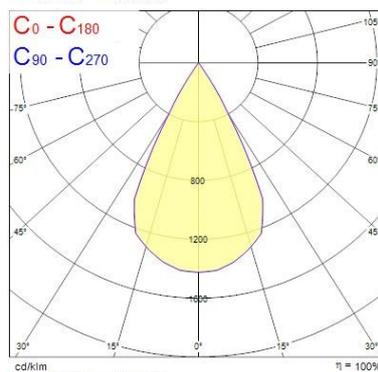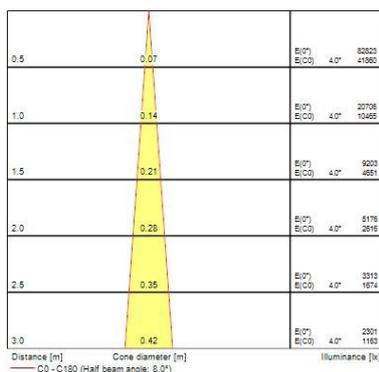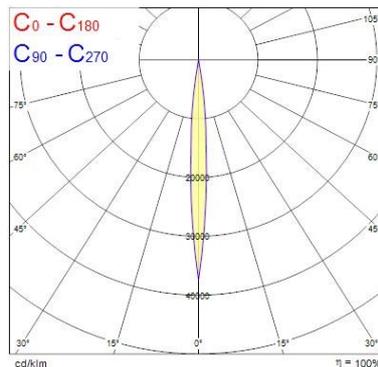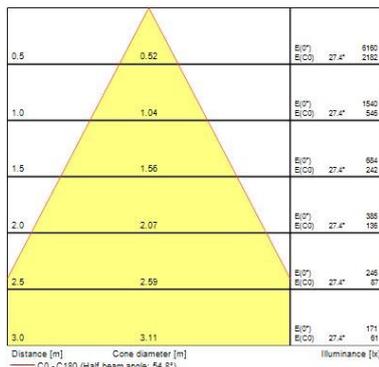

## TECHNICAL DRAWINGS

## Beacon LED Muse II

BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK  
2059730

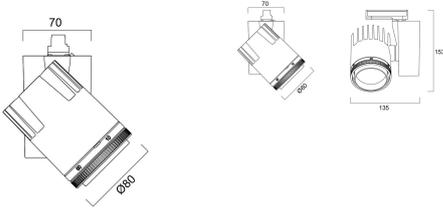

**Concord** 2059730

 This luminaire contains built in LED lamps.


 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

## Beacon LED Muse II

BEACON LED MUSE II 97CRI 3000K L1 TRAILING EDGE BLACK  
2059730

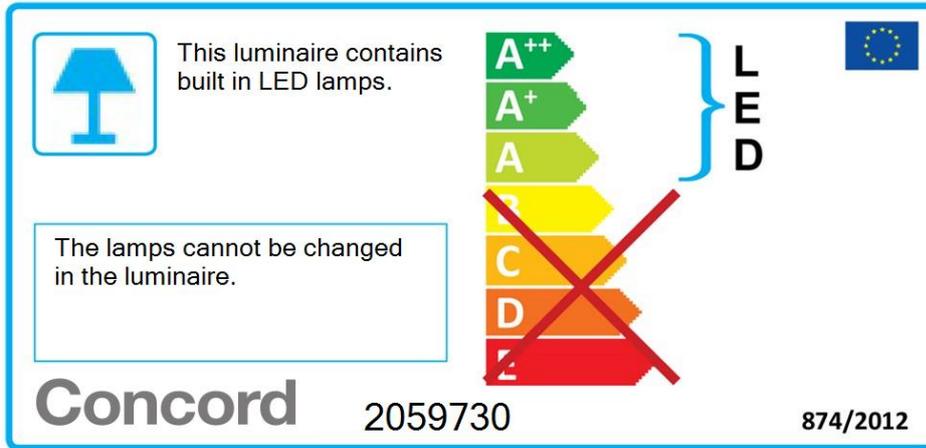

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**Concord** 2059730

874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED

EUROPEAN UNION

Detailed description: The image shows a rectangular energy label with a blue border. On the left, there is a blue icon of a lamp. To its right, the text reads 'This luminaire contains built in LED lamps.' Below this, a white box contains the text 'The lamps cannot be changed in the luminaire.' In the center, there is a vertical energy efficiency scale with seven colored arrows pointing right, labeled A++, A+, A, B, C, D, and E from top to bottom. A large red 'X' is drawn over the B, C, D, and E categories. To the right of the scale, a blue bracket groups the A++, A+, and A categories, with the letters 'L', 'E', and 'D' stacked vertically next to it. In the top right corner of the label is the European Union flag. At the bottom left, the brand name 'Concord' is written in a bold, sans-serif font, followed by the model number '2059730'. At the bottom right, the regulatory reference '874/2012' is printed.