

## PIXER Recessed 600x600

PIXER RECESSED 600X600 HE 4P 3000K SSH01

2069347



### Product features

- PIXER RECESSED 600X600 HE 4P 3000K SSH01 is a high performance low glare office luminaire with individually adjustable light pods to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 600x600mm, White colour - RAL9010. SylSmart Connected Building capable, 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 3550 lm, total power consumption 26W, efficacy 137lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. Glow wire test 650°C.



### PRODUCT OVERVIEW

IPC Code	2069347
Product name	PIXER RECESSED 600X600 HE 4P 3000K SSH01
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Education, Hospitality, Office
Certifications	EUNEW021
ETIM Class	EC002892
E-number FI	4262003
Fixture luminous flux (lm)	3550
Luminaire efficacy (lm/W)	137
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class II
Control gear type	SylSmart SSH
Control gear mounting	Remote
Dimmable	Y
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768693474
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	2069347
----------	---------

## Pixer Recessed 600x600

*PIXER RECESSED 600X600 HE 4P 3000K SSH01*

2069347

<b>Product name</b>	PIXER RECESSED 600X600 HE 4P 3000K SSH01
<b>Technology</b>	LED (3 SDCM)
<b>Housing</b>	Powder coated steel
<b>Mount</b>	Recessed (surface mounting with accessory)
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education,Hospitality,Office
<b>Certifications</b>	EUNEW021
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4262003

### Optical data

<b>Fixture luminous flux (lm)</b>	3550
<b>Luminaire efficacy (lm/W)</b>	137
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	<19
<b>Photobiological Risk Group</b>	RG0

### Electrical data

<b>Total power consumption (W)</b>	26
<b>Mains voltage (V)</b>	220-240V~
<b>Electrical protection</b>	Class II
<b>Control gear required</b>	No
<b>Control gear type</b>	SylSmart SSH
<b>Control gear mounting</b>	Remote
<b>Dimmable</b>	Y
<b>Drive current (mA)</b>	800
<b>Inrush Current (A)</b>	29
<b>Inrush Duration (µs)</b>	146
<b>Glow Wire Test (°C)</b>	850
<b>Nominal Frequency (Hz)</b>	50/60Hz
<b>Max. Luminaires per 10A C Breaker</b>	28
<b>Max. Luminaires per 13A C Breaker</b>	37
<b>Max. Luminaires per 16A C Breaker</b>	43
<b>Max. Luminaires per 20A C Breaker</b>	57
<b>Max. Luminaires per 10A B Breaker</b>	16
<b>Max. Luminaires per 13A B Breaker</b>	23
<b>Max. Luminaires per 16A B Breaker</b>	26
<b>Max. Luminaires per 20A B Breaker</b>	28

### Lifetime data

<b>Lumen maintenance - L70 B50</b>	72000
<b>Lumen maintenance - L70 B20</b>	72000
<b>Lumen maintenance - L80 B50</b>	72000
<b>Lumen maintenance - L80 B20</b>	72000
<b>Lumen maintenance - L80 B10</b>	72000
<b>Lumen maintenance - L90 B50</b>	72000

## Pixer Recessed 600x600

PIXER RECESSED 600X600 HE 4P 3000K SSH01  
2069347

Lumen maintenance - L90 B20	66000
Lumen maintenance - L90 B10	61000

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	75
Weight (kg)	6.0
Recessed Depth (mm)	150



### Packaging

Single packaging type	Carton
Product EAN number	5025768693474
Packaging single length / height (cm)	72.8
Packaging single width (cm)	63.0
Packaging single depth (cm)	15.9
DUN14 (outer)	05025768693474
Units per outer package	1
Packaging outer length / height (cm)	72.8
Packaging outer width (cm)	63.0
Packaging outer depth (cm)	15.9

### Safety data

Dry applications use only	Yes
---------------------------	-----

## PHOTOMETRY

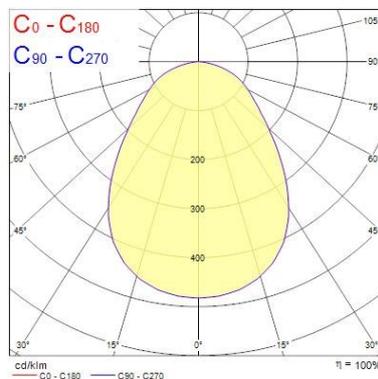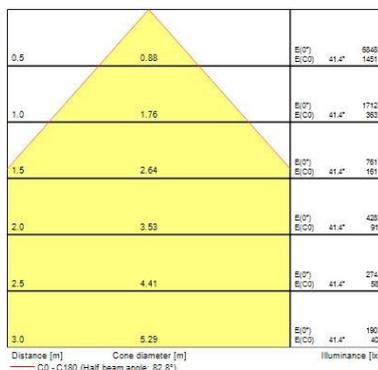


## TECHNICAL DRAWINGS

## Pixer Recessed 600x600

PIXER RECESSED 600X600 HE 4P 3000K SSH01

2069347



**Concord** 2069347

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

## Pixer Recessed 600x600

PIXER RECESSED 600X600 HE 4P 3000K SSH01

2069347

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**Concord** 2069347 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED