


Start Track Spot Large High Output

START Track Spot L HO 4000lm 830 NB BLK
0004841



Product features

- Integrated LED spotlight, Textured Black - RAL9005, compact and minimalist design, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 15°, color temperature: 3000K, total system power: 35W, total fixture output: 4005 lm, LOR: 100%, colour rendering: Ra: 80 typical, LED Chromaticity: 3 step MacAdam ellipse, lifetime: >50000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 900mA, electronic driver, non-dimmable, power factor: 0.93, electrical protection: Class II, Global Track 3 Phase adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x164x240, weight: 1.368kg.

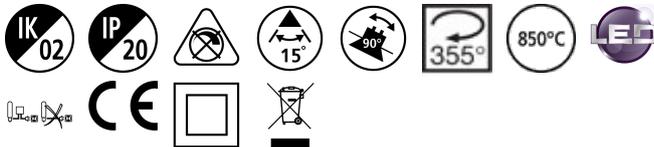

PRODUCT OVERVIEW

IPC Code	0004841
Product name	START Track Spot L HO 4000lm 830 NB BLK
Technology	LED
Housing	ADC12 Aluminium
Mount	Global Track
Fixture rating	Enclosed
General application	Retail,
Certifications	EUNEW010
ETIM Class	EC001744
Fixture luminous flux (lm)	4005
Luminaire efficacy (lm/W)	114
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	15
Photobiological Risk Group	RG1
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Average life (Nominal) (h)	50000
Housing colour	Texture Blk Polyester - Ral 9005
IP rating	IP20
IK rating	IK02
Product EAN number	5410288048413
Lamps	No
Included lamp	Integrated LED

Start Track Spot Large High Output

START Track Spot L HO 4000lm 830 NB BLK
0004841

DATA TABLE

General data

IPC Code	0004841
Product name	START Track Spot L HO 4000lm 830 NB BLK
Technology	LED
Housing	ADC12 Aluminium
Mount	Global Track
Fixture rating	Enclosed
General application	Retail,
Operating temperature range (°C)	0 to +25°C
Certifications	EUNEW010
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	4005
Luminaire efficacy (lm/W)	114
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	15
Distribution type	Narrow Beam
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	35
Current (A)	0.15
Mains voltage (V)	230-240V~
Lamp power factor	0.93
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15.1
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic
Control gear mounting	Integral
Dimmable	No
Drive current (mA)	900
Inrush Current (A)	10
Inrush Duration (µs)	100
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	35
Max. Luminaires per 13A C Breaker	50
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	75

Start Track Spot Large High Output

START Track Spot L HO 4000lm 830 NB BLK
0004841

Max. Luminaires per 10A B Breaker	28
Max. Luminaires per 13A B Breaker	40
Max. Luminaires per 16A B Breaker	52
Max. Luminaires per 20A B Breaker	60

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	50000
Lumen maintenance - L70 B10	50000
Lumen maintenance - L80 B50	50000
Lumen maintenance - L80 B20	50000
Lumen maintenance - L80 B10	50000
Lumen maintenance - L90 B50	50000
Lumen maintenance - L90 B20	50000
Lumen maintenance - L90 B10	50000
Average life (Nominal) (h)	50000

Physical data

Vertical Tilt (°)	90
Horizontal rotation (°)	355
Housing colour	Texture Blk Polyester - Ral 9005
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Reflector finish	Faceted
Nominal Product Width (mm)	164
Nominal Product Height (mm)	240
Weight (kg)	1.368

Packaging


Single packaging type	Carton
Product EAN number	5410288048413
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05410288048413
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

Safety data

Dry applications use only	Yes
---------------------------	-----

PHOTOMETRY

Start Track Spot Large High Output *START Track Spot L HO 4000lm 830 NB BLK* 0004841

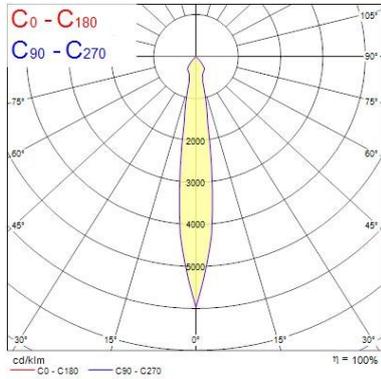


0.5	0.13	E(0°) E(C0)	7.3°	9605 47288
1.0	0.26	E(0°) E(C0)	7.3°	23908 11931
1.5	0.38	E(0°) E(C0)	7.3°	10638 5282
2.0	0.51	E(0°) E(C0)	7.3°	5977 2954
2.5	0.64	E(0°) E(C0)	7.3°	3828 1891
3.0	0.77	E(0°) E(C0)	7.3°	2586 1313

Distance [m] Cone diameter [m] Illuminance [lx]

C0 - C180 (Half beam angle: 14.6°)

TECHNICAL DRAWINGS



SYLVANIA 0004841

This luminaire contains built in LED lamps.

A++
A+
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012

Start Track Spot Large High Output *START Track Spot L HO 4000lm 830 NB BLK* 0004841

 This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0004841  LED 

874/2012