

Start Flat Panel LED UGR19

START FLAT PANEL UGR19 1200 3000K DALI G2

0047638



Product features

- Edge lit LED flat low glare panel (UGR<19). Low Flicker, 33 W, Warm White, 3000 K, 3000 lumens, 91 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, DALI dimmable driver. (HxWxD) 10.5 x 1195 x 295 mm



PRODUCT OVERVIEW

IPC Code	0047638
Product name	START FLAT PANEL UGR19 1200 3000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274166
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	91
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288476384
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

Start Flat Panel LED UGR19

START FLAT PANEL UGR19 1200 3000K DALI G2

0047638

General data

IPC Code	0047638
Product name	START FLAT PANEL UGR19 1200 3000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274166

Optical data

Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	91
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam angle (Rated) (°)	90
Glare control	<19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	33
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class II
Control gear type	Electronic
Dimmable	Yes
Drive current (mA)	900
Inrush Current (A)	23.3
Inrush Duration (µs)	192
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 16A B Breaker	24

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

Housing colour	White
IP rating	IP40/20
IK rating	IK03
Diffuser material	PMMA

Start Flat Panel LED UGR19

START FLAT PANEL UGR19 1200 3000K DALI G2

0047638

Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	10.5
Weight (kg)	3.19



Packaging

Single packaging type	Carton
Product EAN number	5410288476384
Packaging single length / height (cm)	128.7
Packaging single width (cm)	33.0
Packaging single depth (cm)	3.8
DUN14 (outer)	15410288476381
Units per outer package	2
Packaging outer length / height (cm)	130.7
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	11.7

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

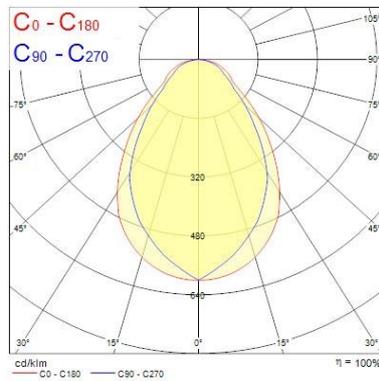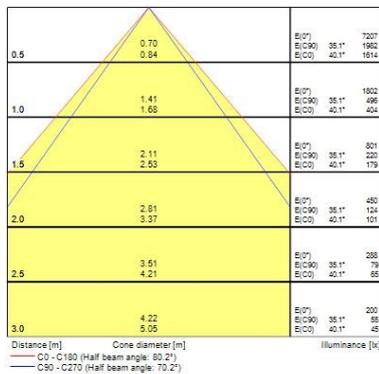

TECHNICAL DRAWINGS



Start Flat Panel LED UGR19

START FLAT PANEL UGR19 1200 3000K DALI G2

0047638

SYLVANIA 0047638

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0047638  874/2012