

Start Flat Panel LED UGR19

START FLAT PANEL UGR19 625 3000K DALI G2

0047640



Product features

- Edge lit LED flat low glare panel (UGR<19). Low Flicker, 33 W, Warm White, 3000 K, 3300 lumens, 100 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, DALI dimmable driver. (HxWxD) 10.5 x 620 x 620 mm



PRODUCT OVERVIEW

IPC Code	0047640
Product name	START FLAT PANEL UGR19 625 3000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC002892
Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288476407
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

Start Flat Panel LED UGR19

START FLAT PANEL UGR19 625 3000K DALI G2

0047640

General data

IPC Code	0047640
Product name	START FLAT PANEL UGR19 625 3000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam angle (Rated) (°)	90
Glare control	<19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	33
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class II
Control gear type	Electronic
Dimmable	Yes
Drive current (mA)	900
Inrush Current (A)	23.3
Inrush Duration (µs)	192
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 16A B Breaker	24

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

Housing colour	White
IP rating	IP40/20
IK rating	IK03
Diffuser material	PMMA
Nominal Product Length (mm)	620

Start Flat Panel LED UGR19

START FLAT PANEL UGR19 625 3000K DALI G2

0047640

Nominal Product Width (mm)	620
Nominal Product Height (mm)	10.5
Weight (kg)	3.308

Packaging

Single packaging type	Carton
Product EAN number	5410288476407
Packaging single length / height (cm)	70.9
Packaging single width (cm)	65.3
Packaging single depth (cm)	3.8
DUN14 (outer)	15410288476404
Units per outer package	2
Packaging outer length / height (cm)	73.4
Packaging outer width (cm)	68.6
Packaging outer depth (cm)	10.5

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------


PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.75 0.85	7311	37.0° 1885	40.3° 1829	
1.0	1.51 1.70	1829	37.0° 466	40.3° 407	
1.5	2.26 2.54	812	37.0° 207	40.3° 151	
2.0	3.01 3.39	457	37.0° 117	40.3° 102	
2.5	3.77 4.24	292	37.0° 79	40.3° 66	
3.0	4.52 5.09	203	37.0° 52	40.3° 45	


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 80.6°)

— C90 - C270 (Half beam angle: 74.0°)

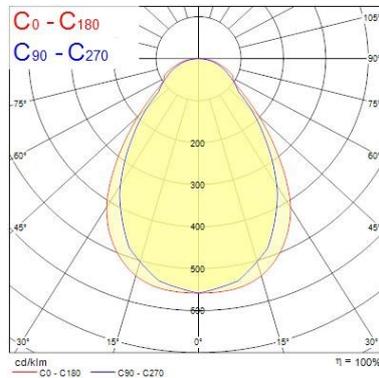

TECHNICAL DRAWINGS



Start Flat Panel LED UGR19

START FLAT PANEL UGR19 625 3000K DALI G2

0047640

SYLVANIA 0047640

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0047640  874/2012