


Optix Recessed 600x600 Medium Output


OPTIX RECESSED 600x600 2L 4000K ALU SSH EM

0044159



Product features

- OPTIX RECESSED 600x600 2L 4000K ALU SSH EM is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Connected Building capable. 3hr combined maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 27W. Luminaire efficacy 126lm/W. Lumen maintenance of L90B50 > 72000h, L90B10 = 46000h. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044159
Product name	OPTIX RECESSED 600x600 2L 4000K ALU SSH EM
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW022
ETIM Class	EC002892
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	126
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	1
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	SylSmart SSH
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288441597
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

Optix Recessed 600x600 Medium Output

OPTIX RECESSED 600x600 2L 4000K ALU SSH EM

0044159

General data

IPC Code	0044159
Product name	OPTIX RECESSED 600x600 2L 4000K ALU SSH EM
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW022
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	126
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	1
Emergency duration (h)	3

Electrical data

Total power consumption (W)	27
Mains voltage (V)	220-240V~
Lamp power factor	0.96
Electrical protection	Class I
Control gear required	No
Control gear type	SylSmart SSH
Dimmable	Yes
Drive current (mA)	250
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 16A C Breaker	56

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	50000
Lumen maintenance - L90 B10	46000

Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin

Optix Recessed 600x600 Medium Output

OPTIX RECESSED 600x600 2L 4000K ALU SSH EM





0044159

Diffuser material	Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	38
Weight (kg)	5.0

Packaging


Single packaging type	Carton
Product EAN number	5410288441597
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288441597
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

PHOTOMETRY

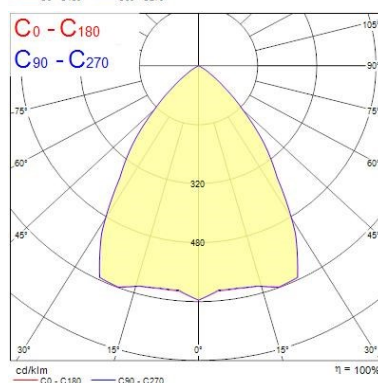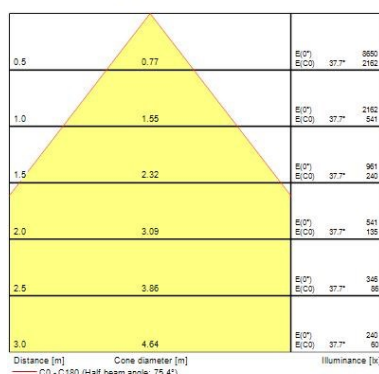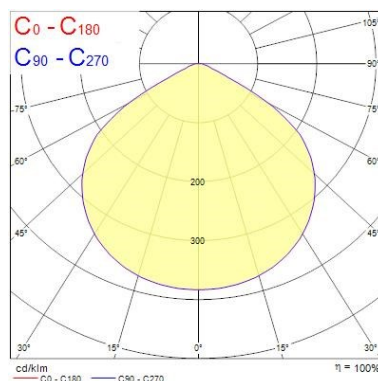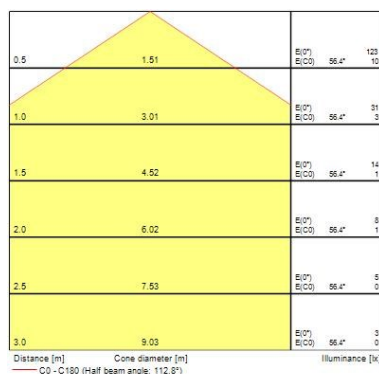

TECHNICAL DRAWINGS

Optix Recessed 600x600 Medium Output OPTIX RECESSED 600x600 2L 4000K ALU SSH EM 0044159



0044159

This luminaire contains built in LED lamps.

LED

The lamps cannot be changed in the luminaire.

874/2012

Optix Recessed 600x600 Medium Output

OPTIX RECESSED 600x600 2L 4000K ALU SSH EM
0044159

