Start Panel LED

START PANEL 600 3000K G4

0047778



Product features

- LED back-lit recessed IP44 panel, 3000K Warm White, 3900lm delivered from 30W, 130lm/W total system effciency, energy efficient external driver included as standard, even distribution of light throughout fixture, long lifetime of 50,000 hours (L70), size (HxWxD) 596x596x65mm.

PRODUCT OVERVIEW

IPC Code	0047778
Product name	START PANEL 600 3000K G4
Technology	LED
Housing	Steel
Mount	Recessed
General application	Office,Hospitality,Retail,Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274178
Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	130
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	<25
Photobiological Risk Group	RG0
Total power consumption (W)	30
Electrical protection	Class II
Housing colour	White RAL9016
IP rating	IP44
IK rating	IK03
Product EAN number	5410288477787
Lamps	Yes
Included lamp	0

DATA TABLE

General data

IPC Code	0047778
Product name	START PANEL 600 3000K G4
Technology	LED
Housing	Steel
Mount	Recessed

© Feilo Sylvania | Date Printed: 04 Dec 2018

Start Panel LED

START PANEL 600 3000K G4

0047778

General application	Office,Hospitality,Retail,Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274178

Optical data

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	130
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam angle (Rated) (°)	107
Glare control	<25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	30
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class II
Drive current (mA)	130
Inrush Current (A)	22
Inrush Duration (µs)	250
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	45
Max. Luminaires per 13A C Breaker	58
Max. Luminaires per 16A C Breaker	72
Max. Luminaires per 20A C Breaker	90

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L80 B10	30000

Physical data

Housing colour	White RAL9016
IP rating	IP44
IK rating	IK03
Diffuser material	PC
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	63
Weight (kg)	2.682

Packaging

Single packaging type	Carton
Product EAN number	5410288477787
Packaging single length / height (cm)	63.0
Packaging single width (cm)	61.5

© Feilo Sylvania | Date Printed: 04 Dec 2018


Start Panel LED


START PANEL 600 3000K G4

0047778


Packaging single depth (cm)	7.6
DUN14 (outer)	05410288477787
Units per outer package	1
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	61.5
Packaging outer depth (cm)	7.6

PHOTOMETRY

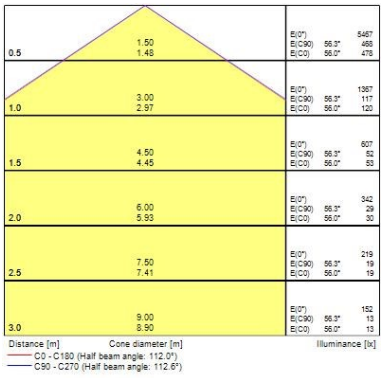

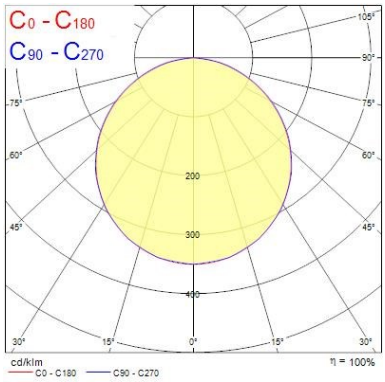

TECHNICAL DRAWINGS





© Feilo Sylvania | Date Printed: 04 Dec 2018

Start Panel LED

START PANEL 600 3000K G4

0047778

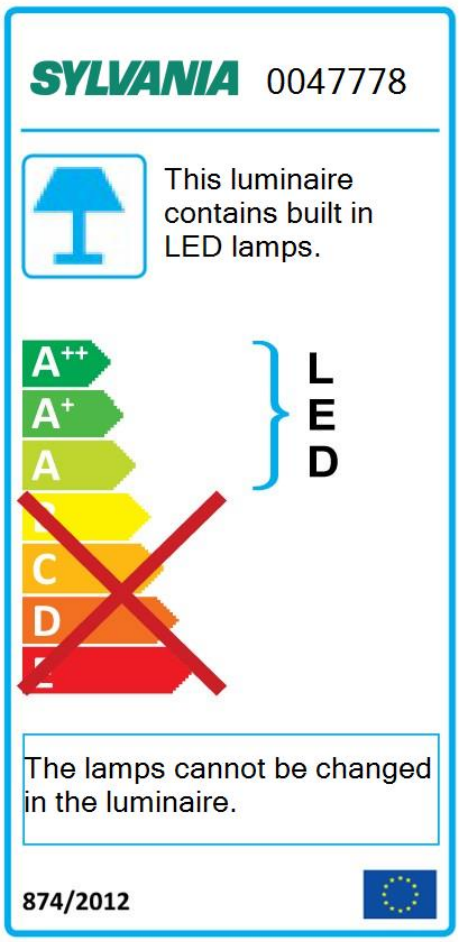

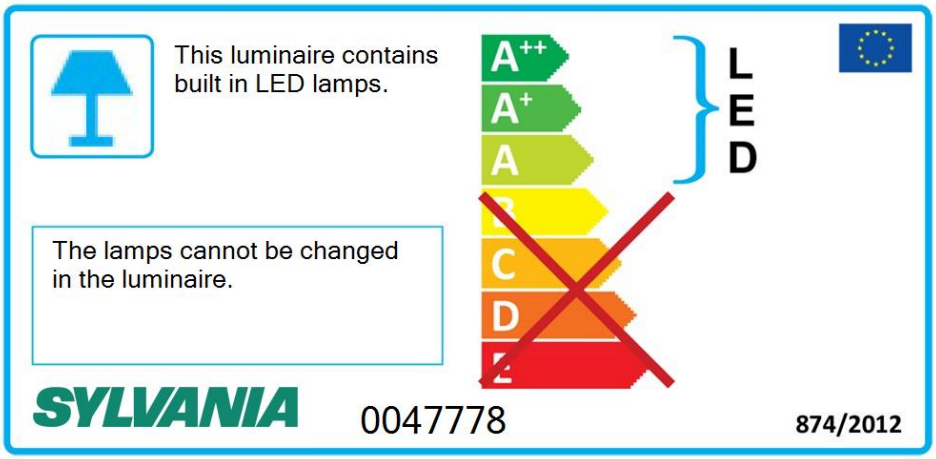

© Feilo Sylvania | Date Printed: 04 Dec 2018