

Start Panel LED HO START PANEL HO 600 4000K G4 0047781



Product features

- LED back-lit recessed IP44 panel (high output), 4000K Neutral White, 4750lm delivered from 36W, 132lm/W total system efficiency, energy efficient external driver included as standard, even distribution of light throughout fixture, long lifetime of 50,000 hours (L70), size (HxWxD) 596x596x65mm.



PRODUCT OVERVIEW

IPC Code	0047781
Product name	START PANEL HO 600 4000K G4
Technology	LED
Housing	Steel
Mount	Recessed
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274187
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	135
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	<25
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Housing colour	White RAL9016
IP rating	IP44
IK rating	IK03
Product EAN number	5410288477817
Lamps	Yes
Included lamp	0

DATA TABLE

General data

IPC Code	0047781
Product name	START PANEL HO 600 4000K G4
Technology	LED
Housing	Steel
Mount	Recessed
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW008

Start Panel LED HO START PANEL HO 600 4000K G4 0047781

ETIM Class	EC002892
E-number FI	4274187

Optical data

Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	135
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam angle (Rated) (°)	107
Glare control	<25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V~
Lamp power factor	0.97
Electrical protection	Class II
Drive current (mA)	155
Inrush Current (A)	22
Inrush Duration (µs)	250
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	48
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	75

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L80 B10	30000

Physical data

Housing colour	White RAL9016
IP rating	IP44
IK rating	IK03
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	63
Weight (kg)	2.692

Packaging

Single packaging type	Carton
Product EAN number	5410288477817
Packaging single length / height (cm)	63.0
Packaging single width (cm)	61.5
Packaging single depth (cm)	7.6
DUN14 (outer)	05410288477817
Units per outer package	1
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	61.5

Start Panel LED HO START PANEL HO 600 4000K G4 0047781

Packaging outer depth (cm)


7.6

PHOTOMETRY


0.5	1.55 1.49	E(0°) E(C90) E(C0)	8559 262 870
1.0	3.10 2.98	E(0°) E(C90) E(C0)	1640 130 142
1.5	4.65 4.46	E(0°) E(C90) E(C0)	729 58 63
2.0	6.21 5.95	E(0°) E(C90) E(C0)	410 33 36
2.5	7.76 7.44	E(0°) E(C90) E(C0)	262 21 23
3.0	9.31 8.93	E(0°) E(C90) E(C0)	162 14 16

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 112.2°)
— C90 - C270 (Half beam angle: 114.4°)

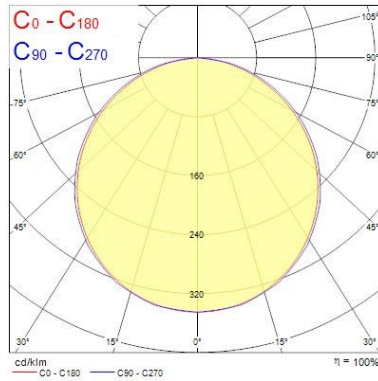



TECHNICAL DRAWINGS




Start Panel LED HO START PANEL HO 600 4000K G4 0047781


SYLVANIA 0047781


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0047781  874/2012