

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM

0044158



Product features

- OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. White plastic low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Connected Building capable. 3hr combined maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2850lm. Power consumption 21W. Luminaire efficacy 136lm/W. Lumen maintenance of L90B50 > 72000h, L90B10 = 46000h. UGR<19, Luminance at 65°<3000 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044158
Product name	OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW022
ETIM Class	EC002892
Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	138
Colour temperature (K)	4000
CRI (Ra)	80
Glare control	19
Photobiological Risk Group	0
Total power consumption (W)	21
Electrical protection	Class I
Control gear type	SylSmart SSH
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288441580
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0044158
----------	---------

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM

0044158

Product name	OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW022
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	138
Colour temperature (K)	4000
CRI (Ra)	80
Glare control	19
Photobiological Risk Group	0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	21
Mains voltage (V)	220-240V~
Lamp power factor	0.96
Electrical protection	Class I
Control gear required	No
Control gear type	SylSmart SSH
Dimmable	Yes
Drive current (mA)	180
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 16A C Breaker	56

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	50000
Lumen maintenance - L90 B10	46000

Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin
Diffuser material	Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596

Optix Recessed 600x600 Standard Output


OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM
0044158

Nominal Product Height (mm)	38
Weight (kg)	5.0

Packaging



Single packaging type	Carton
Product EAN number	5410288441580
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288441580
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

PHOTOMETRY

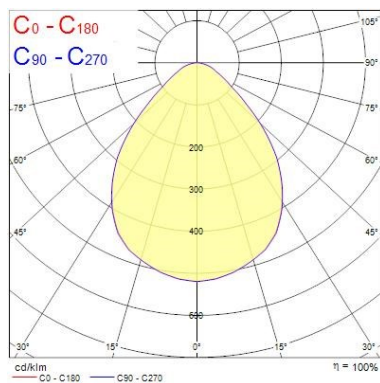

0.5	1.51	E(0°) E(C0)	56.4°	133 10
1.0	3.01	E(0°) E(C0)	56.4°	31 3
1.5	4.52	E(0°) E(C0)	56.4°	14 1
2.0	6.02	E(0°) E(C0)	56.4°	8 1
2.5	7.53	E(0°) E(C0)	56.4°	6 0
3.0	9.03	E(0°) E(C0)	56.4°	3 0


Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 112.8°) Illuminance [lx]

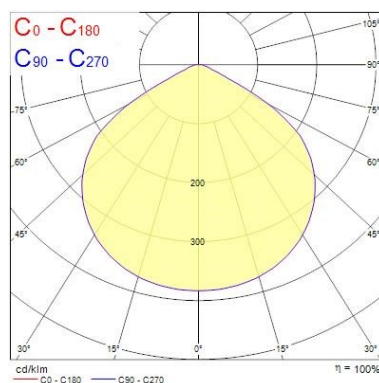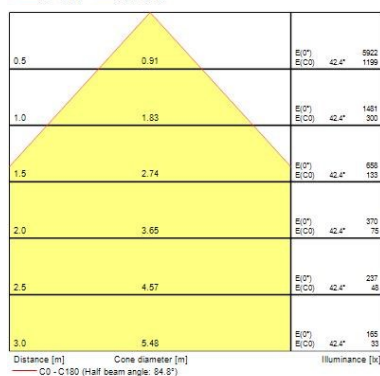

TECHNICAL DRAWINGS

Optix Recessed 600x600 Standard Output


OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM
0044158



SYLVANIA 0044158



This luminaire contains built in LED lamps.

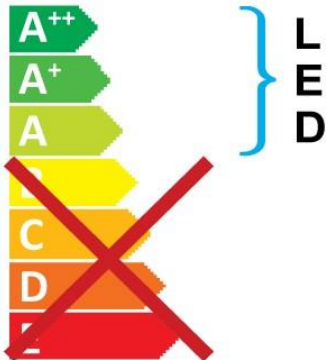

The lamps cannot be changed in the luminaire.

874/2012


Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K WHITE SSH EM

0044158

