

## Myriad V Solid State Pendant - White - Remote Gear


*MYRIAD PENDANT 4000K REMOTE PHDIM WHT*

2049587



### Product features

- High-end architectural (4000K) neutral white LED pendant with Phase dimmable driver and remote gear housing, finished in a white finish (RAL9016)



### PRODUCT OVERVIEW

|                            |                                                     |
|----------------------------|-----------------------------------------------------|
| IPC Code                   | 2049587                                             |
| Product name               | MYRIAD PENDANT 4000K REMOTE PHDIM WHT               |
| Technology                 | LED                                                 |
| Mount                      | Ceiling pendant                                     |
| Environment                | Interior                                            |
| General application        | Hospitality, Office, Retail, Residential & Consumer |
| Certifications             | EUNEW008                                            |
| ETIM Class                 | EC001743                                            |
| Fixture luminous flux (lm) | 1093                                                |
| Luminaire efficacy (lm/W)  | 109.3                                               |
| LOR (%)                    | 100                                                 |
| Colour temperature (K)     | 4000                                                |
| CRI (Ra)                   | 80                                                  |
| Beam Angle (°)             | 30                                                  |
| Photobiological Risk Group | -                                                   |

## Myriad V Solid State Pendant - White - Remote Gear

*MYRIAD PENDANT 4000K REMOTE PHDIM WHT*

2049587

|                             |                |
|-----------------------------|----------------|
| Total power consumption (W) | 10             |
| Electrical protection       | Class II       |
| Control gear mounting       | Remote         |
| Dimmable                    | Yes            |
| Housing colour              | White          |
| IP rating                   | IP20           |
| IK rating                   | IK02           |
| Product EAN number          | 5025768495870  |
| Lamps                       | No             |
| Included lamp               | INTEGRATED LED |

### DATA TABLE

#### General data

|                     |                                                  |
|---------------------|--------------------------------------------------|
| IPC Code            | 2049587                                          |
| Product name        | MYRIAD PENDANT 4000K REMOTE PHDIM WHT            |
| Technology          | LED                                              |
| Mount               | Ceiling pendant                                  |
| Environment         | Interior                                         |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Certifications      | EUNEW008                                         |
| ETIM Class          | EC001743                                         |

#### Optical data

|                            |                    |
|----------------------------|--------------------|
| Fixture luminous flux (lm) | 1093               |
| Luminaire efficacy (lm/W)  | 109.3              |
| LOR (%)                    | 100                |
| Colour temperature (K)     | 4000               |
| CRI (Ra)                   | 80                 |
| Adjustable chromaticity    | N                  |
| Beam Angle (°)             | 30                 |
| Distribution type          | Direct symmetrical |
| Photobiological Risk Group | -                  |

#### Electrical data

|                             |           |
|-----------------------------|-----------|
| Total power consumption (W) | 10        |
| Mains voltage (V)           | 220-240V~ |
| Electrical protection       | Class II  |
| Control gear mounting       | Remote    |
| Transformer required        | Yes       |
| Dimmable                    | Yes       |
| Nominal Frequency (Hz)      | 50/60Hz   |

#### Lifetime data

|                             |       |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
|-----------------------------|-------|

#### Physical data

|                |       |
|----------------|-------|
| Housing colour | White |
|----------------|-------|

## Myriad V Solid State Pendant - White - Remote Gear



MYRIAD PENDANT 4000K REMOTE PHDIM WHT  
2049587

|                             |      |
|-----------------------------|------|
| IP rating                   | IP20 |
| IK rating                   | IK02 |
| Nominal Product Width (mm)  | 75   |
| Nominal Product Height (mm) | 129  |
| Max. Lamp Diameter (mm) - D | 75   |
| Weight (kg)                 | 0.45 |


### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5025768495870  |
| Packaging single length / height (cm) | 17.5           |
| Packaging single width (cm)           | 15.0           |
| Packaging single depth (cm)           | 17.5           |
| DUN14 (outer)                         | 05025768495870 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 17.5           |
| Packaging outer width (cm)            | 15.0           |
| Packaging outer depth (cm)            | 17.5           |

## PHOTOMETRY

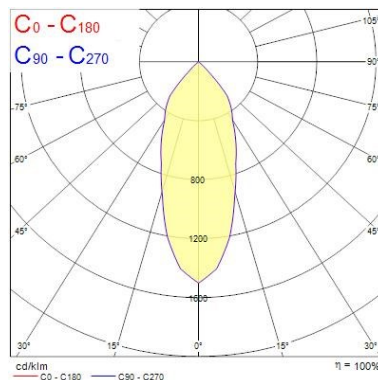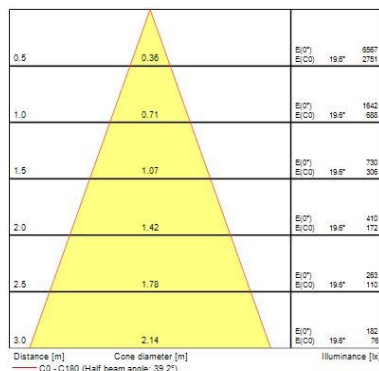

## TECHNICAL DRAWINGS



## Myriad V Solid State Pendant - White - Remote Gear *MYRIAD PENDANT 4000K REMOTE PHDIM WHT* 2049587

