

Myriad V Solid State Pendant - White - Remote Gear

MYRIAD PENDANT 3000K REMOTE EB WHT
2050688



Product features

- High-end architectural (3000K) warm white LED pendant with non dimmable driver and remote gear housing, finished in a white finish (RAL9016)



PRODUCT OVERVIEW

| | |
|-----------------------------|--|
| IPC Code | 2050688 |
| Product name | MYRIAD PENDANT 3000K REMOTE EB WHT |
| Technology | LED |
| Mount | Ceiling pendant |
| Environment | Interior |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Certifications | EUNEW008 |
| ETIM Class | EC001743 |
| Fixture luminous flux (lm) | 1114 |
| Luminaire efficacy (lm/W) | 111.4 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 80 |
| Beam Angle (°) | 30 |
| Photobiological Risk Group | - |
| Total power consumption (W) | 10 |
| Electrical protection | Class II |

Myriad V Solid State Pendant - White - Remote Gear

MYRIAD PENDANT 3000K REMOTE EB WHT
2050688

| | |
|-----------------------|----------------|
| Control gear mounting | Remote |
| Dimmable | No |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768506880 |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|---------------------|--|
| IPC Code | 2050688 |
| Product name | MYRIAD PENDANT 3000K REMOTE EB WHT |
| Technology | LED |
| Mount | Ceiling pendant |
| Environment | Interior |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Certifications | EUNEW008 |
| ETIM Class | EC001743 |

Optical data

| | |
|----------------------------|--------------------|
| Fixture luminous flux (lm) | 1114 |
| Luminaire efficacy (lm/W) | 111.4 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 80 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 30 |
| Distribution type | Direct symmetrical |
| Photobiological Risk Group | - |

Electrical data

| | |
|-----------------------------|-----------|
| Total power consumption (W) | 10 |
| Mains voltage (V) | 220-240V~ |
| Electrical protection | Class II |
| Control gear mounting | Remote |
| Dimmable | No |
| Drive current (mA) | 250 |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
|-----------------------------|-------|

Physical data

| | |
|-----------------------------|-------|
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Nominal Product Length (mm) | 75 |


Myriad V Solid State Pendant - White - Remote Gear MYRIAD PENDANT 3000K REMOTE EB WHT 2050688

| | |
|-------------------------------|------|
| Nominal Product Width (mm) | 75 |
| Nominal Product Height (mm) | 129 |
| Nominal Product Diameter (mm) | 75 |
| Max. Lamp Diameter (mm) - D | 75 |
| Weight (kg) | 0.45 |



Packaging

| | |
|---------------------------------------|---------------|
| Single packaging type | Carton |
| Product EAN number | 5025768506880 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |


PHOTOMETRY

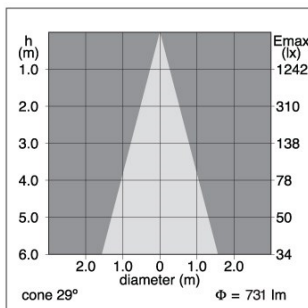


4000K

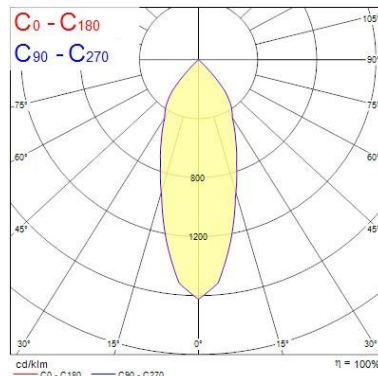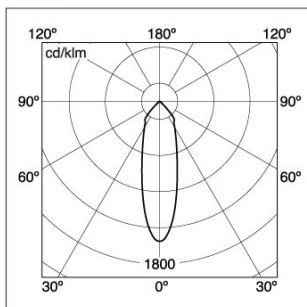

Myriad V Solid State Pendant - White - Remote Gear MYRIAD PENDANT 3000K REMOTE EB WHT 2050688

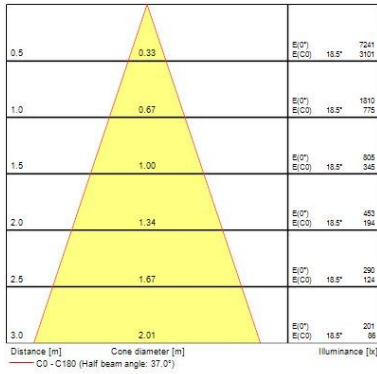



TECHNICAL DRAWINGS




Myriad V Solid State Pendant - White - Remote Gear MYRIAD PENDANT 3000K REMOTE EB WHT 2050688


Concord 2050688


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2050688  874/2012