

Myriad V Solid State Pendant - Silver - Surface Mounted

MYRIAD PENDANT 4000K SURFACE PHDIM SIL

2049552



Product features

- High-end architectural (4000K) neutral white LED pendant with Phase dimmable driver and surface mounted housing, finished in a silver finish (RAL9006)



PRODUCT OVERVIEW

IPC Code	2049552
Product name	MYRIAD PENDANT 4000K SURFACE PHDIM SIL
Technology	LED
Mount	Ceiling pendant
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC001743
E-number SE	7561413
E-number Norway	3290212
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Beam Angle (°)	30
Photobiological Risk Group	-
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	Yes
Housing colour	Silver
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495528
Included lamp	INTEGRATED LED

DATA TABLE

Myriad V Solid State Pendant - Silver - Surface Mounted

MYRIAD PENDANT 4000K SURFACE PHDIM SIL

2049552

General data

IPC Code	2049552
Product name	MYRIAD PENDANT 4000K SURFACE PHDIM SIL
Technology	LED
Mount	Ceiling pendant
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC001743
E-number SE	7561413
E-number Norway	3290212

Optical data

Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Photobiological Risk Group	-

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Dimmable	Yes
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
-----------------------------	-------

Physical data

Housing colour	Silver
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.95

Packaging


Single packaging type	Carton
Product EAN number	5025768495528
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0

Myriad V Solid State Pendant - Silver - Surface Mounted

MYRIAD PENDANT 4000K SURFACE PHDIM SIL
2049552

Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


PHOTOMETRY

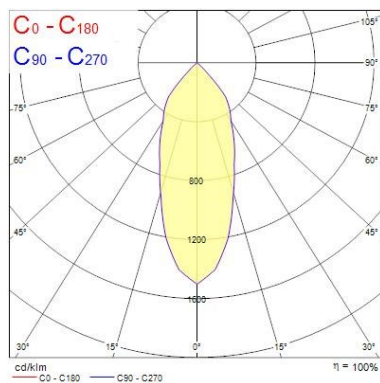

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	0.36	19.8°	19.8°	6567
1.0	0.71	19.8°	19.8°	1642
1.5	1.07	19.8°	19.8°	730
2.0	1.42	19.8°	19.8°	410
2.5	1.78	19.8°	19.8°	263
3.0	2.14	19.8°	19.8°	182

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 39.2°)

TECHNICAL DRAWINGS



Myriad V Solid State Pendant - Silver - Surface Mounted *MYRIAD PENDANT 4000K SURFACE PHDIM SIL* 2049552

