


Myriad V Solid State Pendant - White - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM WHT
2049549



Product features

- High-end architectural (3000K) warm white LED pendant with Phase dimmable driver and surface mounted housing, finished in a white finish (RAL9016)

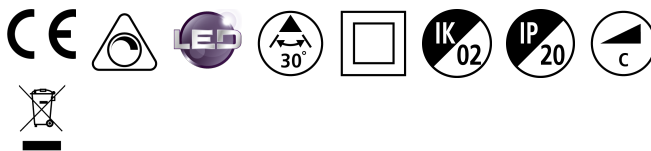

PRODUCT OVERVIEW

IPC Code	2049549
Product name	MYRIAD PENDANT 3000K SURFACE PHDIM WHT
Technology	LED
Mount	Ceiling pendant
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC001743
E-number SE	7561418
E-number Norway	3290205
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Beam Angle (°)	30
Photobiological Risk Group	-
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	Yes
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495498
Included lamp	INTEGRATED LED

Myriad V Solid State Pendant - White - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM WHT

2049549

DATA TABLE

General data

IPC Code	2049549
Product name	MYRIAD PENDANT 3000K SURFACE PHDIM WHT
Technology	LED
Mount	Ceiling pendant
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC001743
E-number SE	7561418
E-number Norway	3290205

Optical data

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Photobiological Risk Group	-

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	Yes
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
-----------------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	75
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.95


Myriad V Solid State Pendant - White - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM WHT
2049549

Packaging

Single packaging type	Carton
Product EAN number	5025768495498
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


PHOTOMETRY

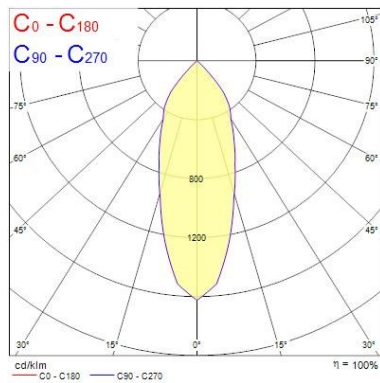

0.5	0.33	E(0°) E(C0)	15.5°	7541 3101
1.0	0.67	E(0°) E(C0)	15.5°	1810 775
1.5	1.00	E(0°) E(C0)	15.5°	805 345
2.0	1.34	E(0°) E(C0)	15.5°	483 194
2.5	1.67	E(0°) E(C0)	15.5°	290 124
3.0	2.01	E(0°) E(C0)	15.5°	201 85

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 37.0°)

TECHNICAL DRAWINGS



Myriad V Solid State Pendant - White - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM WHT
2049549

