


Syl-lighter LED II 240

Syl-Lighter LED II 240 RO 25W NW
3031825



Product features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2289LM, 25W, 92lm/W, 4000K, Driver Current: 632mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, 50,000 hrs (L70), (HxW) 65x225mm, 5 step MacAdam ellipse, 0.65kg, RAL9003, Class 2, 220-240V, energy class: A++, A+, A



PRODUCT OVERVIEW

IPC Code	3031825
Product name	Syl-Lighter LED II 240 RO 25W NW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4271267
E-number SE	7467176
Fixture luminous flux (lm)	2289
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	74
Glare control	23.4
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	Electronic
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	White (RAL 9003)
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971318255
Lamps	Yes
Included lamp	INTEGRATED LED

Syl-lighter LED II 240

Syl-Lighter LED II 240 RO 25W NW

3031825

DATA TABLE

General data

IPC Code	3031825
Product name	Syl-Lighter LED II 240 RO 25W NW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality
Operating temperature range (°C)	-10 to +40
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4271267
E-number SE	7467176

Optical data

Fixture luminous flux (lm)	2289
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Direct - Symmetrical
Glare control	23.4
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	25
Mains voltage (V)	220-240V~
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	Electronic
Dimmable	No
Drive current (mA)	632
Inrush Current (A)	6.44
Inrush Duration (µs)	830
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	12
Max. Luminaires per 13A C Breaker	16
Max. Luminaires per 16A C Breaker	20
Max. Luminaires per 20A C Breaker	25

Syl-lighter LED II 240

Syl-Lighter LED II 240 RO 25W NW
3031825

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	38000
Lumen maintenance - L70 B10	35000
Lumen maintenance - L80 B50	28000
Lumen maintenance - L80 B20	24000
Lumen maintenance - L80 B10	22000
Lumen maintenance - L90 B50	14000
Lumen maintenance - L90 B20	11000
Lumen maintenance - L90 B10	10000
Average life (Nominal) (h)	50000

Physical data

Housing colour	White (RAL 9003)
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	Polycarbonate
Reflector finish	Mirror
Nominal Product Height (mm)	65
Nominal Product Diameter (mm)	240
Weight (kg)	0.825
Recessed Depth (mm)	150

Packaging

Single packaging type	Carton
Product EAN number	8711971318255
Packaging single length / height (cm)	27.0
Packaging single width (cm)	27.0
Packaging single depth (cm)	8.0
DUN14 (outer)	18711971318252
Units per outer package	8
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	56.0
Packaging outer depth (cm)	19.5

PHOTOMETRY


Syl-lighter LED II 240

Syl-Lighter LED II 240 RO 25W NW
3031825


0.5	0.76 0.77	E(0°) E(C90) E(C0)	6102 1389 1353
1.0	1.52 1.53	E(0°) E(C90) E(C0)	1350 342 336
1.5	2.28 2.30	E(0°) E(C90) E(C0)	800 152 150
2.0	3.04 3.07	E(0°) E(C90) E(C0)	338 86 85
2.5	3.80 3.84	E(0°) E(C90) E(C0)	218 59 54
3.0	4.55 4.60	E(0°) E(C90) E(C0)	150 38 36

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 75.0°)
— C90 - C270 (Half beam angle: 74.4°)

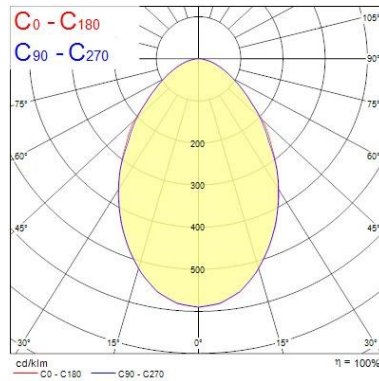

TECHNICAL DRAWINGS



Syl-lighter LED II 240

Syl-Lighter LED II 240 RO 25W NW
3031825

