

Syl-lighter LED II 195

SYL-LIGHTER II 195 16W WW DALI
3031843



Product features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1479LM, 16W, 92lm/W, 3000K, Driver Current: 400mA, CRI80, 74° beam angle, Dali dimmable LED driver, IP44 from the front, IK07, 50,000 hrs (L70), (HxW) 55x195mm, 5 step MacAdam ellipse, 0.45kg, RAL9003, Class 2, 220-240V, energy class: A++, A+, A



PRODUCT OVERVIEW

IPC Code	3031843
Product name	SYL-LIGHTER II 195 16W WW DALI
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Interior
General application	Hospitality
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4270276
E-number SE	7470949
Fixture luminous flux (lm)	1479
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Dimmable
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	White - RAL9003
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971318439
Lamps	No
Included lamp	INTEGRATED LED

Syl-lighter LED II 195

SYL-LIGHTER II 195 16W WW DALI
3031843

DATA TABLE

General data

IPC Code	3031843
Product name	SYL-LIGHTER II 195 16W WW DALI
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Interior
General application	Hospitality
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4270276
E-number SE	7470949

Optical data

Fixture luminous flux (lm)	1479
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Beam angle (Rated) (°)	74
Distribution type	Direct - Symmetrical
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	16
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class II
Control gear required	Yes
Control gear type	Dimmable
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	400
Inrush Current (A)	18
Inrush Duration (µs)	140
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	36
Max. Luminaires per 13A C Breaker	50
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	76
Max. Luminaires per 10A B Breaker	22
Max. Luminaires per 13A B Breaker	30

Syl-lighter LED II 195

SYL-LIGHTER II 195 16W WW DALI
3031843

Max. Luminaires per 16A B Breaker	36
Max. Luminaires per 20A B Breaker	46

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000



Physical data

Housing colour	White - RAL9003
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	Polycarbonate
Reflector finish	Diffuser
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	195
Weight (kg)	0.593

Packaging


Single packaging type	Carton
Product EAN number	8711971318439
Packaging single length / height (cm)	23.2
Packaging single width (cm)	23.2
Packaging single depth (cm)	6.3
DUN14 (outer)	18711971318439
Units per outer package	12
Packaging outer length / height (cm)	48.1
Packaging outer width (cm)	48.1
Packaging outer depth (cm)	20.7

PHOTOMETRY

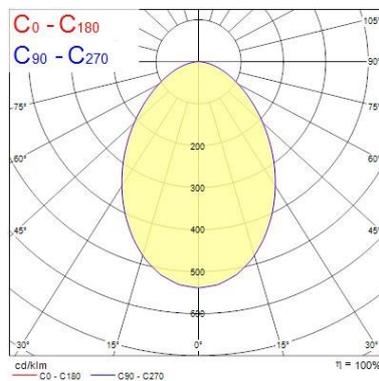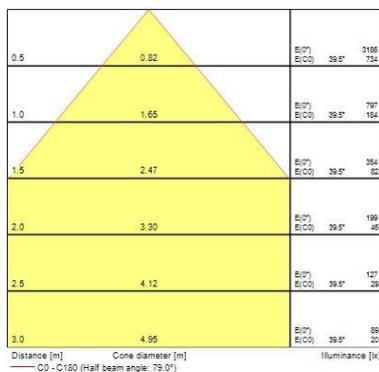

TECHNICAL DRAWINGS

Syl-lighter LED II 195 SYL-LIGHTER II 195 16W WW DALI 3031843



Lumiance 3031843

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Syl-lighter LED II 195 SYL-LIGHTER II 195 16W WW DALI 3031843

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

Lumiance 3031843 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED