

## Beacon LED Projector - Iris

*Beacon LED Iris Projector DALI 3000K Three Circuit Track - White*  
2055976



### Product features

- Beacon Projector offers precision light exactly where it is needed. The Iris Projector has an adjusting lever to create a perfect circle of light in the required size. High colour rendering CRI 97 typical. IR/UV free light source without heat radiation. LED technology provides an energy efficient solution with reduced maintenance costs.



### PRODUCT OVERVIEW

IPC Code	2055976
Product name	Beacon LED Iris Projector DALI 3000K Three Circuit Track - White
Technology	LED
Housing	Aluminium
Mount	Track Mounted
Fixture rating	Enclosed
General application	Museums & Galleries, Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260898
Fixture luminous flux (lm)	474
Luminaire efficacy (lm/W)	14
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG01
Total power consumption (W)	35
Product Voltage (V)	240
Electrical protection	Class II
Control gear type	DALI
Control gear mounting	Integral
Dimmable	Y
Housing colour	White - RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768552139
Lamps	No
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	2055976
----------	---------

## Beacon LED Projector - Iris

*Beacon LED Iris Projector DALI 3000K Three Circuit Track - White*  
2055976

Product name	Beacon LED Iris Projector DALI 3000K Three Circuit Track - White
Technology	LED
Housing	Aluminium
Mount	Track Mounted
Fixture rating	Enclosed
General application	Museums & Galleries,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260898

### Optical data

Fixture luminous flux (lm)	474
Luminaire efficacy (lm/W)	14
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Distribution type	Adjustable
Photobiological Risk Group	RG01

### Electrical data

Total power consumption (W)	35
Mains voltage (V)	230V~
Product Voltage (V)	240
Lamp power factor	0.95
Electrical protection	Class II
Control gear required	Yes
Control gear type	DALI
Control gear mounting	Integral
Dimmable	Y
Drive current (mA)	900
Inrush Current (A)	30
Inrush Duration (µs)	200
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A B Breaker	12
Max. Luminaires per 16A B Breaker	20

### Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L70 B20	72000
Lumen maintenance - L70 B10	72000
Lumen maintenance - L80 B50	72000
Lumen maintenance - L80 B20	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	45000
Lumen maintenance - L90 B20	36000
Lumen maintenance - L90 B10	33000

## Beacon LED Projector - Iris

*Beacon LED Iris Projector DALI 3000K Three Circuit Track - White*  
2055976


### Physical data

Housing colour	White - RAL9016
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	185
Nominal Product Height (mm)	215
Weight (kg)	1.365


### Packaging

Single packaging type	Carton
Product EAN number	5025768552139
Packaging single length / height (cm)	32.0
Packaging single width (cm)	15.5
Packaging single depth (cm)	13.0
DUN14 (outer)	05025768552139
Units per outer package	1
Packaging outer length / height (cm)	32.0
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	13.0

## PHOTOMETRY

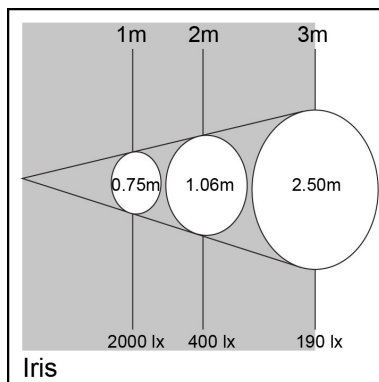

## TECHNICAL DRAWINGS



## Beacon LED Projector - Iris

*Beacon LED Iris Projector DALI 3000K Three Circuit Track - White*  
2055976

