

## Mini Continuum II - Direct - Trimless

### MC2 1.2M 4K DALI WHT OPAL

### 2093115



#### Product features

- 2093115 MC2 1.2M 4K DALI WHT OPAL Continuous lines of LED light, white RAL 9016, direct distribution, trimless detail for a seamless finish, suitable for recessed, semi-recessed, surface-mounted or suspended installation either horizontally or vertically, various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 2350lm, luminaire efficacy: 112lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 90% of the original output (L90), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, DALI dimmable, electrical protection: CLASS I, IP20, suitable for internal internal environment only.



#### PRODUCT OVERVIEW

IPC Code	2093115
Product name	MC2 1.2M 4K DALI WHT OPAL
Technology	LED
Housing	Aluminium
Mount	Recessed, Surface, Suspended
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4237843
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	UGR <24
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	21
Electrical protection	Class I
Control gear type	DALI
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	White
IP rating	IP20
Product EAN number	5025768931156
Lamps	Yes
Included lamp	INTEGRATED LED

## Mini Continuum II - Direct - Trimless

*MC2 1.2M 4K DALI WHT OPAL*  
2093115

### DATA TABLE

#### General data

IPC Code	2093115
Product name	MC2 1.2M 4K DALI WHT OPAL
Technology	LED
Housing	Aluminium
Mount	Recessed, Surface, Suspended
Environment	Internal
General application	Education, Hospitality, Office, Retail
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4237843

#### Optical data

Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct
Glare control	UGR <24
Photobiological Risk Group	Exempt Group 0

#### Electrical data

Total power consumption (W)	21
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class I
Control gear type	DALI
Minimum dimming level (%)	1
Drive current (mA)	800
Inrush Current (A)	40
Inrush Duration (µs)	178
Max. Luminaires per 10A C Breaker	15
Max. Luminaires per 13A C Breaker	20
Max. Luminaires per 16A C Breaker	23
Max. Luminaires per 20A C Breaker	30
Max. Luminaires per 10A B Breaker	9
Max. Luminaires per 13A B Breaker	12
Max. Luminaires per 16A B Breaker	14
Max. Luminaires per 20A B Breaker	18

#### Lifetime data

Lumen maintenance - L70 B50	60000
-----------------------------	-------

## Mini Continuum II - Direct - Trimless

### MC2 1.2M 4K DALI WHT OPAL

### 2093115

Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	47000
Lumen maintenance - L90 B10	33000
Average life (Nominal) (h)	50000

#### Physical data

Housing colour	White
IP rating	IP20
Diffuser finish	Opal
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	54
Nominal Product Height (mm)	86
Weight (kg)	2.5
Recessed Depth (mm)	136

#### Packaging


Single packaging type	Carton
Product EAN number	5025768931156
Packaging single length / height (cm)	125.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	10.0
DUN14 (outer)	05025768931156
Units per outer package	1
Packaging outer length / height (cm)	125.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	10.0

## PHOTOMETRY

Distance [m]	Cone diameter [m]	E(l) <sup>o</sup>	E(l)C90	E(l)C0
0.5	1.13 0.91	4205	609	649
1.0	2.27 1.83	1051	152	212
1.5	3.40 2.74	467	68	94
2.0	4.54 3.65	283	38	53
2.5	5.67 4.57	188	24	34
3.0	6.81 5.48	117	17	24


Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 84.8°)  
— C90 - C270 (Half beam angle: 97.2°)

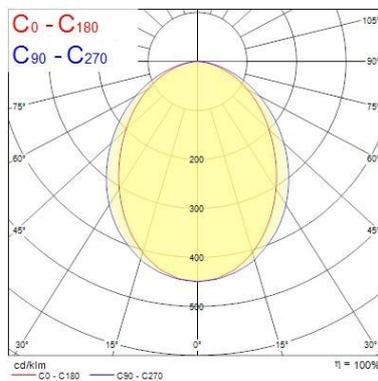


## Mini Continuum II - Direct - Trimless MC2 1.2M 4K DALI WHT OPAL 2093115

### TECHNICAL DRAWINGS



**Concord** 2093115

 This luminaire contains built in LED lamps.

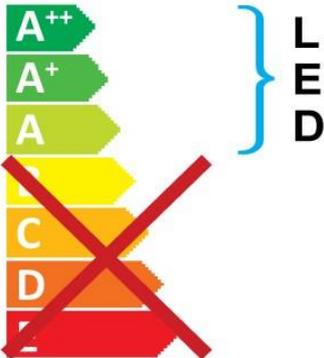


The lamps cannot be changed in the luminaire.

874/2012 

## Mini Continuum II - Direct - Trimless

MC2 1.2M 4K DALI WHT OPAL  
2093115

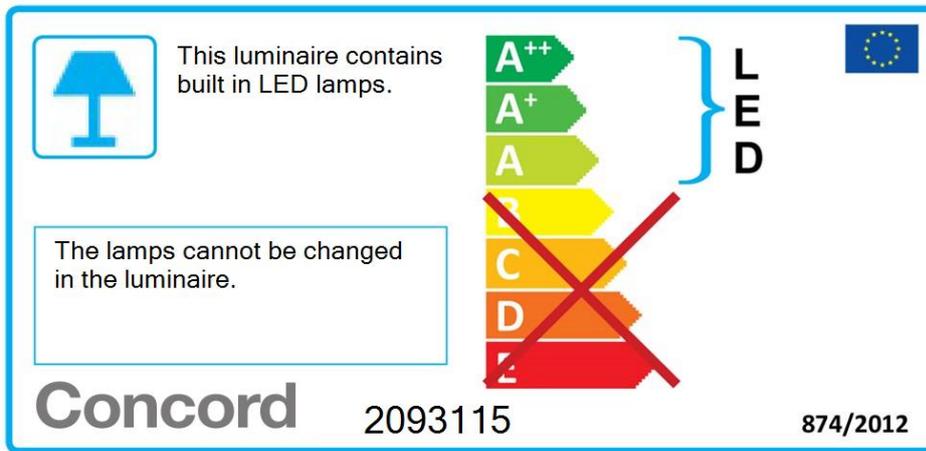

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**Concord** 2093115 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED

EUROPEAN UNION

The energy label features a vertical scale of seven colored arrows pointing right, labeled A++ (dark green), A+ (medium green), A (light green), B (yellow), C (orange), D (red), and E (dark red). A large red 'X' is drawn over the B, C, D, and E categories. A blue bracket on the right side of the scale groups the A++, A+, and A categories under the label 'LED'. The European Union flag is located in the top right corner of the label frame.