


Mini Continuum II - Direct - Trimless - Extensions

MC2 0.6M 4K DALI WHT OPAL

2093158



Product features

- 2093158 MC2 0.6M 4K DALI WHT OPAL Continuous lines of LED light, white RAL 9016, direct distribution, extension module, trimless detail for a seamless finish, suitable for recessed, semi-recessed, surface-mounted or suspended installation either horizontally or vertically, various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 10W, total fixture output: 1150lm, luminaire efficacy: 115lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 90% of the original output (L90), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 400mA, electronic driver, DALI dimmable, electrical protection: CLASS I, IP20, suitable for internal environment only.



PRODUCT OVERVIEW

IPC Code	2093158
Product name	MC2 0.6M 4K DALI WHT OPAL
Technology	LED
Housing	Aluminium
Mount	Recessed, Surface, Suspended
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4237848
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	115
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	UGR <17
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	10
Electrical protection	Class I
Control gear type	DALI
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	White
IP rating	IP20
Product EAN number	5025768931583
Lamps	Yes
Included lamp	INTEGRATED LED

Mini Continuum II - Direct - Trimless - Extensions

MC2 0.6M 4K DALI WHT OPAL
2093158

DATA TABLE

General data

IPC Code	2093158
Product name	MC2 0.6M 4K DALI WHT OPAL
Technology	LED
Housing	Aluminium
Mount	Recessed, Surface, Suspended
Environment	Internal
General application	Education, Hospitality, Office, Retail
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4237848

Optical data

Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	115
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct
Glare control	UGR <17
Photobiological Risk Group	Exempt Group 0

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	DALI
Minimum dimming level (%)	1
Drive current (mA)	400
Inrush Current (A)	17
Inrush Duration (µs)	170
Max. Luminaires per 16A C Breaker	48

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	47000

Mini Continuum II - Direct - Trimless - Extensions

MC2 0.6M 4K DALI WHT OPAL

2093158

Lumen maintenance - L90 B10	33000
Average life (Nominal) (h)	50000


Physical data

Housing colour	White
IP rating	IP20
Diffuser finish	Opal
Diffuser material	Polycarbonate
Nominal Product Length (mm)	600
Nominal Product Width (mm)	54
Nominal Product Height (mm)	86
Weight (kg)	1.5
Recessed Depth (mm)	136

Packaging

Single packaging type	Carton
Product EAN number	5025768931583
Packaging single length / height (cm)	65.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	10.0
DUN14 (outer)	05025768931583
Units per outer package	1
Packaging outer length / height (cm)	65.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	10.0

PHOTOMETRY

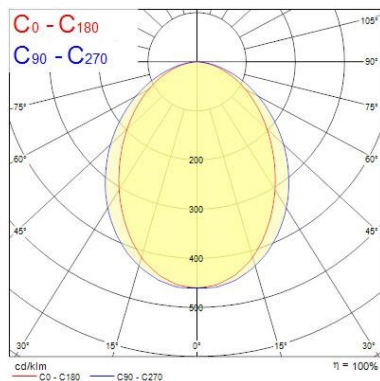

Distance [m]	Cone diameter [m]	E(0°)	E(45°)	E(90°)	E(135°)	E(180°)
0.5	1.11 0.88	2154	48.1°	321	41.3°	67
1.0	2.23 1.76	538	48.1°	80	41.3°	114
1.5	3.34 2.64	239	48.1°	36	41.3°	51
2.0	4.46 3.51	135	48.1°	20	41.3°	29
2.5	5.57 4.39	88	48.1°	13	41.3°	18
3.0	6.69 5.27	60	48.1°	9	41.3°	13


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 82.6°)
 C90 - C270 (Half beam angle: 96.2°)

Illuminance [lx]

TECHNICAL DRAWINGS

Mini Continuum II - Direct - Trimless - Extensions


MC2 0.6M 4K DALI WHT OPAL
2093158



Concord 2093158



This luminaire contains built in LED lamps.

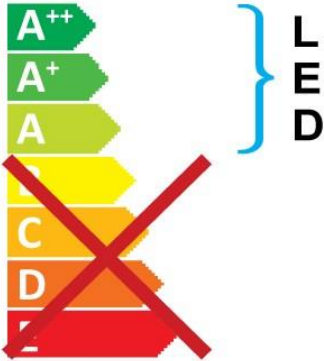

The lamps cannot be changed in the luminaire.

874/2012


Mini Continuum II - Direct - Trimless - Extensions

MC2 0.6M 4K DALI WHT OPAL
2093158

