

## SylSafe Bay


SylSafe Bay MB C EMC NM MS

0041737



### Product features

- SylSafe Bay MB C EMC NM MS is a dust and waterproof surface mounted emergency luminaire for industrial applications. Midbay optics for medium ceiling heights. Non-maintained version for central battery systems. 200lm, 3W, IK03, IP65. Power Factor 0.44. Class II electrical construction.



## PRODUCT OVERVIEW

IPC Code	0041737
Product name	SylSafe Bay MB C EMC NM MS
Technology	LED
Type	LED
Mount	Surface mounted
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	200
Luminaire efficacy (lm/W)	67
Colour temperature (K)	5700
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Total power consumption (W)	3
Electrical protection	Class II
Control gear type	Emergency (3 hour non-maintained)
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288417370
Lamps	No
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	0041737
Product name	SylSafe Bay MB C EMC NM MS
Technology	LED
Type	LED
Mount	Surface mounted

## SylSafe Bay

*SylSafe Bay MB C EMC NM MS*

0041737

General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957

### Optical data

Fixture luminous flux (lm)	200
Luminaire efficacy (lm/W)	67
Colour temperature (K)	5700
CRI (Ra)	75
Distribution type	Mid-Bay
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	3
Mains voltage (V)	230-240V~
Lamp power factor	0.44
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency (3 hour non-maintained)
Drive current (mA)	46
kWh per 1000 hours burning time	3
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Average life (Nominal) (h)	35040
----------------------------	-------

### Physical data



Housing colour	White
IP rating	IP65
IK rating	IK03
Nominal Product Length (mm)	197
Nominal Product Width (mm)	197
Nominal Product Height (mm)	53

### Packaging


Single packaging type	Mix blister(20% carton, 80% pl
Product EAN number	5410288417370
DUN14 (outer)	05410288417370
Units per outer package	5
Packaging outer length / height (cm)	42.2
Packaging outer width (cm)	25.2
Packaging outer depth (cm)	13.2

## PHOTOMETRY

**SylSafe Bay**  
*SylSafe Bay MB C EMC NM MS*  
**0041737**

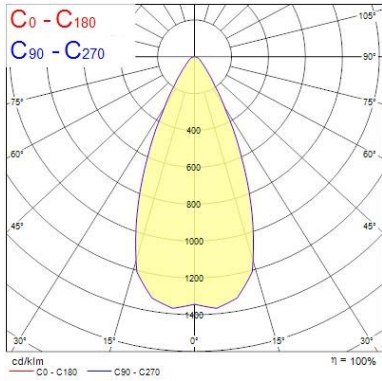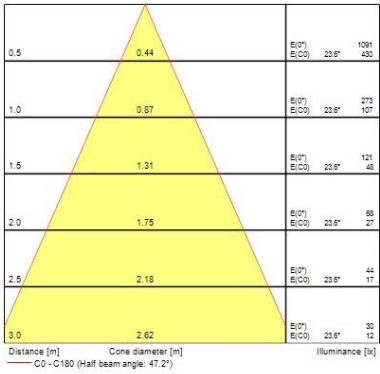

**TECHNICAL DRAWINGS**




## SylSafe Bay


*SylSafe Bay MB C EMC NM MS*

0041737


**SYLVANIA** 0041737




This luminaire contains built in LED lamps.

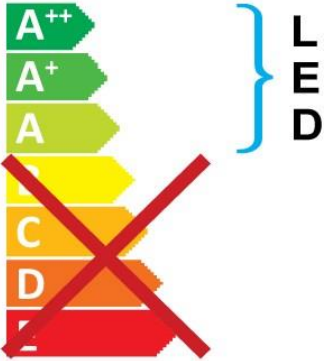


The lamps cannot be changed in the luminaire.


874/2012 



This luminaire contains built in LED lamps.

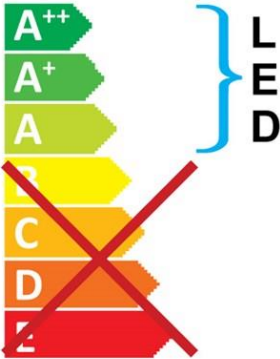

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0041737  874/2012