SylSafe Spot

SylSafe Spot RA C EM3 NM MS

0041729



Product features

- SylSafe Spot RA C EM3 NM MS is a miniature emergency surface mounted downlight with interchangeable optics for open area and escape route illumination. Non-maintained 3 hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. 145lm, 1.8W, IK03, IP40. Power Factor 0.44. Class II electrical construction.

PRODUCT OVERVIEW

IPC Code	0041729
Product name	SylSafe Spot RA C EM3 NM MS
Technology	LED
Type	LED
Mount	Surface mounted
General application	Office,Hospitality,Retail,Museums & Galleries,Education
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	145
Luminaire efficacy (lm/W)	81
Colour temperature (K)	6300
CRI (Ra)	70
Photobiological Risk Group	RG02
Luminous flux (emergency) (lm)	145
Total power consumption (W)	1.8
Electrical protection	Class II
Control gear type	Emergency (3 hour non-maintained)
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP40
IK rating	IK03
Product EAN number	5410288417295
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0041729
Product name	SylSafe Spot RA C EM3 NM MS
Technology	LED
Type	LED
Mount	Surface mounted

© Feilo Sylvania | Date Printed: 13 Dec 2018

SylSafe Spot

SylSafe Spot RA C EM3 NM MS

0041729

General application	Office,Hospitality,Retail,Museums & Galleries,Education
Certifications	EUNEW002
ETIM Class	EC001957

Optical data

Fixture luminous flux (lm)	145
Luminaire efficacy (lm/W)	81
Colour temperature (K)	6300
CRI (Ra)	70
Distribution type	Corridor / Area selectable
Photobiological Risk Group	RG02
Luminous flux (emergency) (lm)	145
Emergency duration (h)	3

Electrical data

Total power consumption (W)	1.8
Mains voltage (V)	230-240V~
Lamp power factor	0.44
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency (3 hour non-maintained)
Drive current (mA)	35
kWh per 1000 hours burning time	2
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	35040

Physical data

Housing colour	White
IP rating	IP40
IK rating	IK03
Nominal Product Length (mm)	120
Nominal Product Width (mm)	120
Nominal Product Height (mm)	44
Weight (kg)	0.246

Packaging

Single packaging type	Carton
Product EAN number	5410288417295
Packaging single length / height (cm)	14.0
Packaging single width (cm)	12.8
Packaging single depth (cm)	5.8
DUN14 (inner)	05410288417295
DUN14 (outer)	05410288417295
Units per outer package	50
Packaging outer length / height (cm)	52.0
Packaging outer width (cm)	34.8
Packaging outer depth (cm)	35.7


© Feilo Sylvania | Date Printed: 13 Dec 2018


SylSafe Spot


SylSafe Spot RA C EM3 NM MS


0041729

PHOTOMETRY

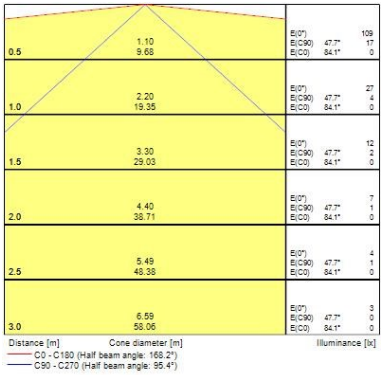


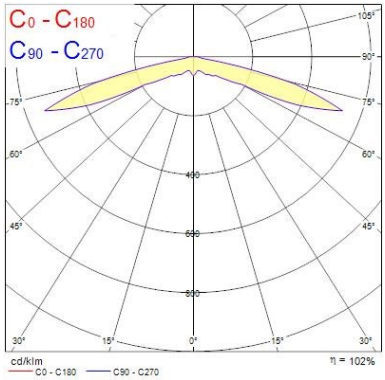


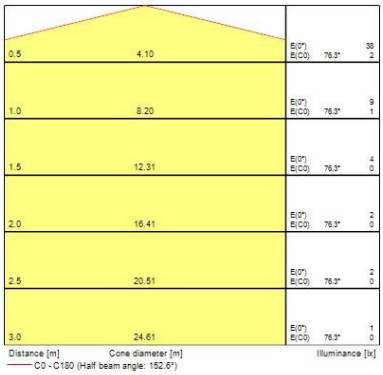

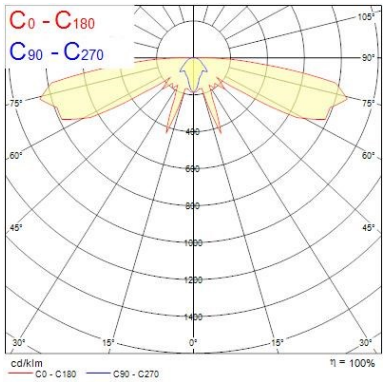

TECHNICAL DRAWINGS







© Feilo Sylvania | Date Printed: 13 Dec 2018

SylSafe Spot

SylSafe Spot RA C EM3 NM MS

0041729

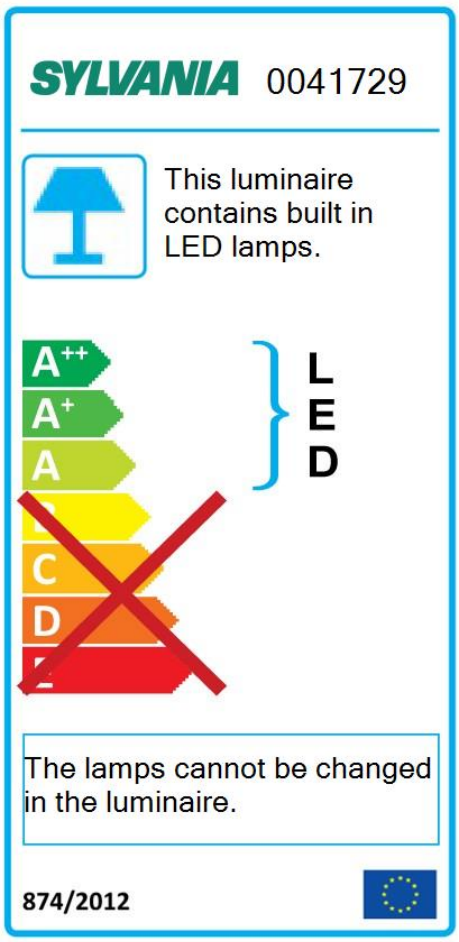

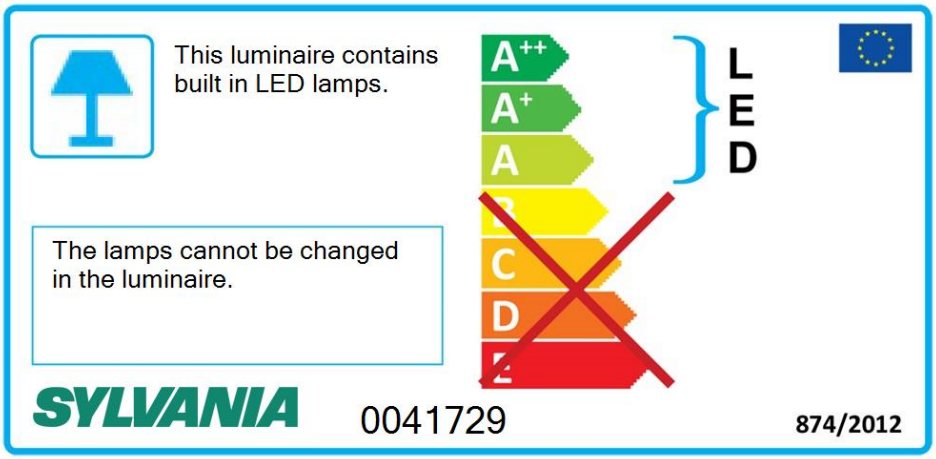

© Feilo Sylvania | Date Printed: 13 Dec 2018