

RouteLED

ROUTELED 3W CORRIDOR WHT DALI

9154044



Product features

- Stand alone emergency luminaire downlight with DALI. Includes Corridor lens, DALI module (inverter) with 4.8v 3ah C Cell Ni-Cad batteries. 24hr recharge time. 3.5V discharge voltage. 700mA output current. 150mA Charge current. Module size is 164x35x28mm - battery size is 27x285mm (Type 8). Module weight 100gm/battery weight 250gm.



PRODUCT OVERVIEW

IPC Code	9154044
Product name	ROUTELED 3W CORRIDOR WHT DALI
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW001
ETIM Class	EC001957
Fixture luminous flux (lm)	197
Colour temperature (K)	6000
Light colour	Daylight
Beam Angle (°)	125
Total power consumption (W)	3
Housing colour	White
IP rating	IP20
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	9154044
Product name	ROUTELED 3W CORRIDOR WHT DALI
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW001
ETIM Class	EC001957

RouteLED

ROUTELED 3W CORRIDOR WHT DALI

9154044

Optical data

Fixture luminous flux (lm)	197
Colour temperature (K)	6000
Light colour	Daylight
Adjustable chromaticity	N
Beam Angle (°)	125
Emergency duration (h)	3

Electrical data

Total power consumption (W)	3
Drive current (mA)	700

Physical data


Housing colour	White
IP rating	IP20
Weight (kg)	1.1
Recessed Depth (mm)	40

Packaging

Single packaging type	Carton
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	5.0
Units per outer package	1
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	5.0

PHOTOMETRY

TECHNICAL DRAWINGS

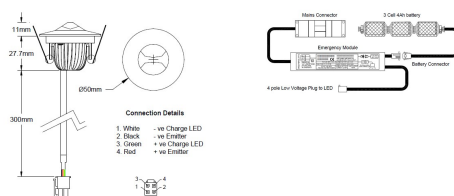


RouteLED

ROUTELED 3W CORRIDOR WHT DALI

9154044


Concord 9154044


 This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

LED

This luminaire is sold with a bulb of the energy class:


874/2012 

 This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

LED

This luminaire is sold with a bulb of the energy class:

Concord 9154044  874/2012