RouteLED

ROUTELED 3W CORRIDOR WHT S/TEST

9154069



Product features

- Stand alone emergency luminare downlight with Self Test facility. Includes Corridor lens, module (inverter) with 3.6v 4ah Ni-Cad batteries. 24hr recharge time. 1000mA discharge currrent. 700mA output current. Module size is 152x26.5x28.5mm - battery size is 38x270mm (Type 8). Module weight 150gm/battery weight 400gm.

PRODUCT OVERVIEW

IPC Code	9154069
Product name	ROUTELED 3W CORRIDOR WHT S/TEST
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001957
Fixture luminous flux (lm)	197
Colour temperature (K)	6000
Light colour	Daylight
Beam Angle (°)	125
Total power consumption (W)	3
IP rating	IP20
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	9154069
Product name	ROUTELED 3W CORRIDOR WHT S/TEST
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001957

Optical data

Fixture luminous flux (lm)	197

© Feilo Sylvania | Date Printed: 13 Dec 2018

RouteLED

ROUTELED 3W CORRIDOR WHT S/TEST

9154069

Colour temperature (K)	6000
Light colour	Daylight
Adjustable chromaticity	N
Beam Angle (°)	125
Emergency duration (h)	3

Electrical data

Total power consumption (W)	3
Drive current (mA)	700


Physical data


IP rating	IP20
Weight (kg)	1.1
Recessed Depth (mm)	40

Packaging

Single packaging type	Carton
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	5.0
Units per outer package	1
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	5.0

TECHNICAL DRAWINGS







© Feilo Sylvania | Date Printed: 13 Dec 2018

RouteLED

ROUTELED 3W CORRIDOR WHT S/TEST

9154069

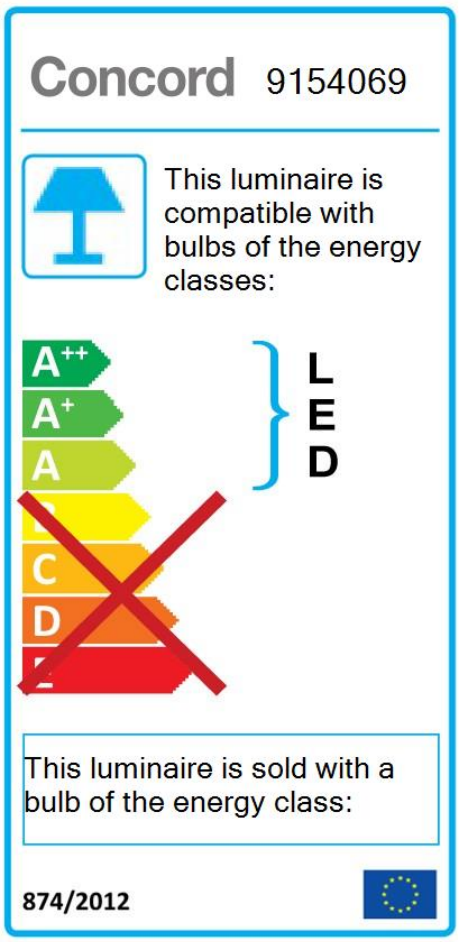

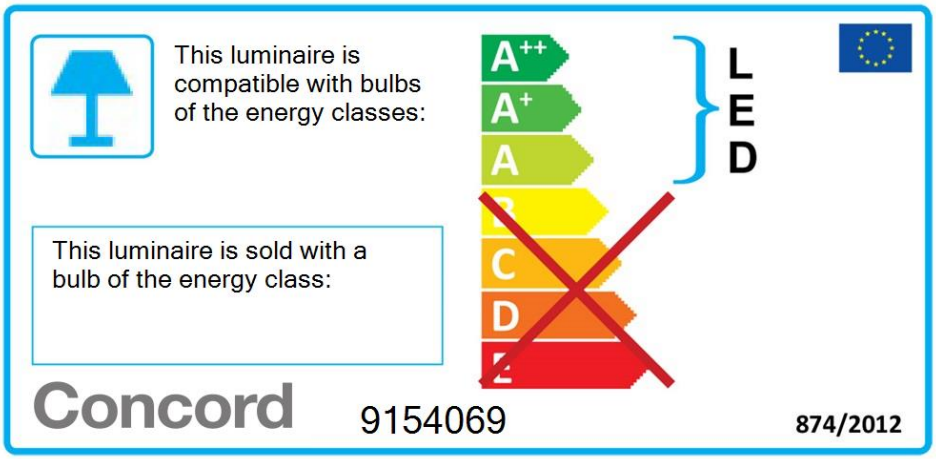

© Feilo Sylvania | Date Printed: 13 Dec 2018