

## RouteLED

### ROUTELED 3W STANDARD WHT DALI

### 9154072



#### Product features

- Stand alone emergency luminaire downlight with DALI. Includes Standard lens, DALI module (inverter) with 4.8v 3ah C Cell Ni-Cad batteries. 24hr recharge time. 3.5V discharge voltage. 700mA output current. 150mA Charge current. Module size is 164x35x28mm - battery size is 27x285mm (Type 8). Module weight 100gm/battery weight 250gm.



## PRODUCT OVERVIEW

IPC Code	9154072
Product name	ROUTELED 3W STANDARD WHT DALI
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001957
Fixture luminous flux (lm)	195
Colour temperature (K)	6000
Light colour	Daylight
Beam Angle (°)	110
Total power consumption (W)	3
IP rating	IP20
Lamps	No
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	9154072
Product name	ROUTELED 3W STANDARD WHT DALI
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001957

### Optical data

Fixture luminous flux (lm)	195
----------------------------	-----

## RouteLED

ROUTELED 3W STANDARD WHT DALI

9154072

Colour temperature (K)	6000
Light colour	Daylight
Adjustable chromaticity	N
Beam Angle (°)	110
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	3
Drive current (mA)	700


### Physical data

IP rating	IP20
Weight (kg)	0.2
Recessed Depth (mm)	40

### Packaging

Single packaging type	Carton
Packaging single length / height (cm)	5.0
Packaging single width (cm)	5.0
Packaging single depth (cm)	5.0
Units per outer package	1
Packaging outer length / height (cm)	5.0
Packaging outer width (cm)	5.0
Packaging outer depth (cm)	5.0

## TECHNICAL DRAWINGS

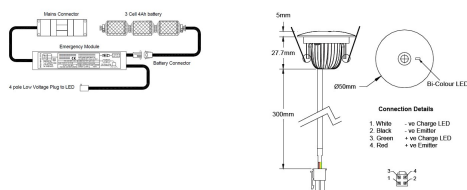


## RouteLED

ROUTELED 3W STANDARD WHT DALI

9154072


**Concord** 9154072


 This luminaire is compatible with bulbs of the energy classes:

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

} **LED**

This luminaire is sold with a bulb of the energy class:


874/2012 

 This luminaire is compatible with bulbs of the energy classes:

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

} **LED**

This luminaire is sold with a bulb of the energy class:

**Concord** 9154072 

874/2012