RouteLED

ROUTELED 3W SURFACE OA

9154080



Product features

- Surface mounted stand alone emergency luminare downlight. Includes Open Area lens, module (inverter) with 3.6v 4.5ah Ni-Cad batteries. 24hr recharge time. 200mA charge currrent. 1000mA discharge current. Dimensions 185mm diameter x 40mm height. Weight: 1.1kg.

PRODUCT OVERVIEW

IPC Code	9154080
Product name	ROUTELED 3W SURFACE OA
Technology	LED
Housing	Polycarbonate
Mount	Surface Mounted
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW002
Fixture luminous flux (lm)	207
Colour temperature (K)	6000
Light colour	Daylight
Beam Angle (°)	110
Total power consumption (W)	3
IP rating	IP20
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	9154080
Product name	ROUTELED 3W SURFACE OA
Technology	LED
Housing	Polycarbonate
Mount	Surface Mounted
Environment	Internal
General application	Education,Hospitality,Office,Retail
Certifications	EUNEW002

Optical data

Fixture luminous flux (lm)	207
Colour temperature (K)	6000
Light colour	Daylight
Adjustable chromaticity	N

© Feilo Sylvania | Date Printed: 13 Dec 2018

RouteLED
ROUTELED 3W SURFACE OA
9154080

Beam Angle (°)	110
Emergency duration (h)	3

Electrical data

Total power consumption (W)	3
Drive current (mA)	700


Physical data

IP rating	IP20
Nominal Product Width (mm)	185
Weight (kg)	1.1

Packaging

Single packaging type	Carton
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	5.0
Units per outer package	1
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	5.0

TECHNICAL DRAWINGS





© Feilo Sylvania | Date Printed: 13 Dec 2018

RouteLED

ROUTELED 3W SURFACE OA

9154080

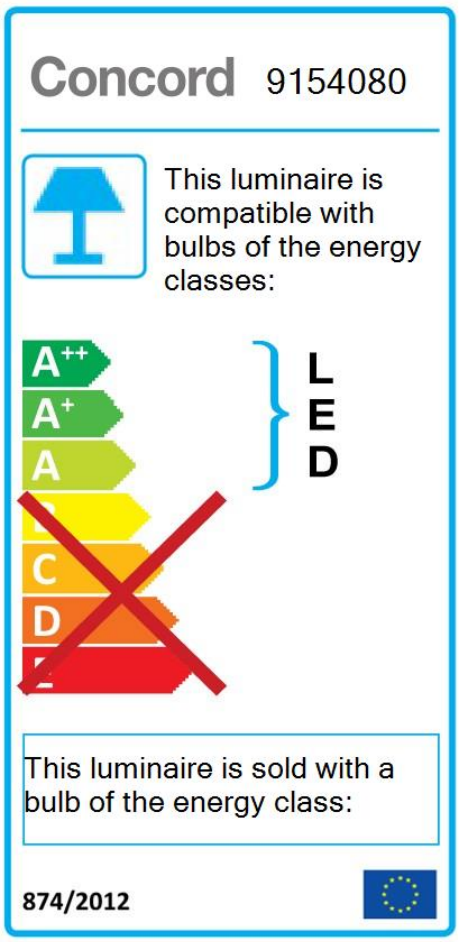

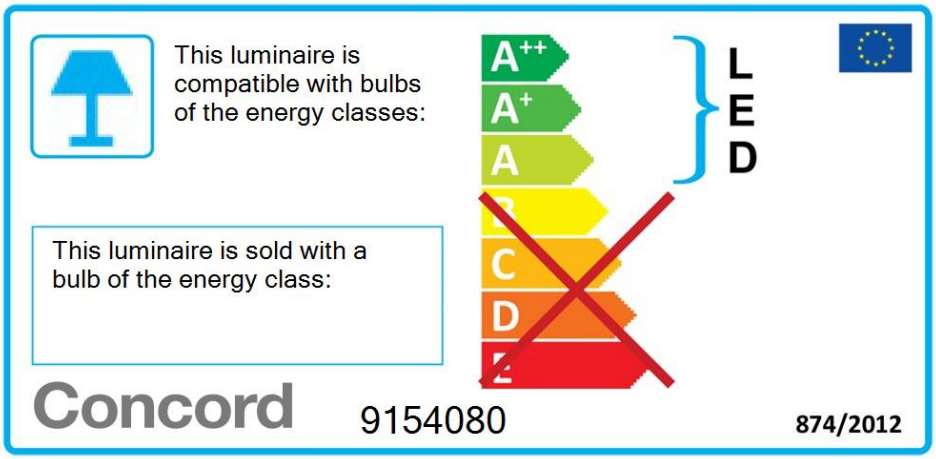

© Feilo Sylvania | Date Printed: 13 Dec 2018