

SylSafe EXIT

SylSafe Exit EX C EM3 MT DA

0041748



Product features

- SylSafe Exit EX C EM3 MT MS is a surface mounted emergency exit sign. Rotateable legend for wall / ceiling mounting applications. Comes with ISO7010 compliant legend pack. Arrows left, right, up, down and a blank sheet for single sided versions. EC legend pack is available as accessory. Viewing distance 26m. White housing colour. Maintained 3hr emergency operation with NiMH rechargeable battery. Recharge period 24 hours. Self testing with DALI monitoring capability. 2.2W, IK03, IP20. Power Factor 0.6. Class II electrical construction.



EMERGENCY
LUMINAIRE
(DO NOT SWITCH OFF)

PRODUCT OVERVIEW

IPC Code	0041748
Product name	SylSafe Exit EX C EM3 MT DA
Technology	LED
Type	LED
Mount	Surface mounted
General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	-
Luminaire efficacy (lm/W)	0
Colour temperature (K)	5700
CRI (Ra)	80
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	280
Total power consumption (W)	2.2
Electrical protection	Class II
Control gear type	Emergency
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288417486
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0041748
Product name	SylSafe Exit EX C EM3 MT DA
Technology	LED
Type	LED
Mount	Surface mounted

SylSafe EXIT

SylSafe Exit EX C EM3 MT DA

0041748

General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957

Optical data

Fixture luminous flux (lm)	-
Luminaire efficacy (lm/W)	0
Colour temperature (K)	5700
CRI (Ra)	80
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	280
Emergency duration (h)	3

Electrical data

Total power consumption (W)	2.2
Mains voltage (V)	230-240V~
Lamp power factor	0.6
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency
Drive current (mA)	18
kWh per 1000 hours burning time	2
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	35040
----------------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	308
Nominal Product Width (mm)	18
Nominal Product Height (mm)	234
Weight (kg)	0.866

Packaging

Single packaging type	Carton
Product EAN number	5410288417486
Packaging single length / height (cm)	31.0
Packaging single width (cm)	22.6
Packaging single depth (cm)	4.4
DUN14 (outer)	05410288417486
Units per outer package	1
Packaging outer length / height (cm)	31.0
Packaging outer width (cm)	22.6
Packaging outer depth (cm)	4.4



SylSafe EXIT

SylSafe Exit EX C EM3 MT DA

0041748

PHOTOMETRY

TECHNICAL DRAWINGS

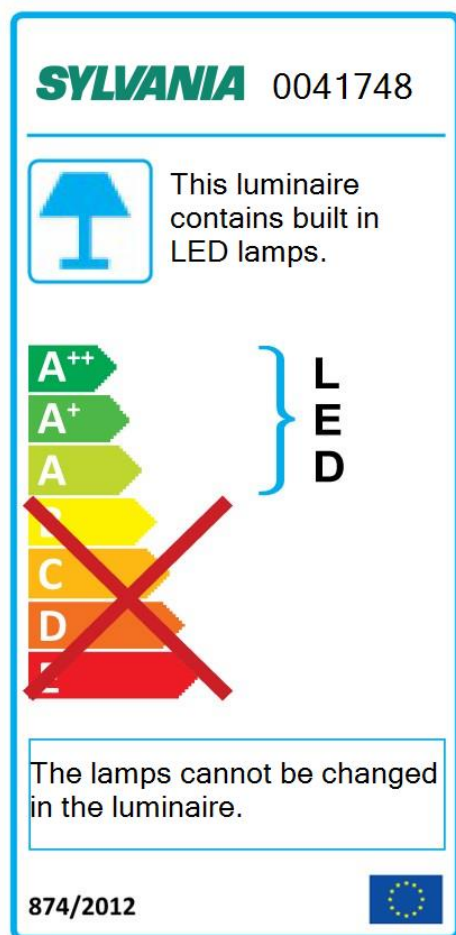

SylSafe EXIT

SylSafe Exit EX C EM3 MT DA

0041748

