SylSafe EXIT Mod

SylSafe Exit-Mod EX 9 EM3 MT DA

0041759



Product features

- SylSafe Exit-Mod EX 9 EM3 MT DA is a wall mounted emergency exit sign. Comes with ISO7010 compliant legend pack. Arrows left, right, up, down and a blank sheet for single sided versions. EC legend pack is available as accessory. Viewing distance 26m. White housing colour. Maintained 3hr emergency operation with NiMH rechargeable battery. Recharge period 24 hours. Self testing with DALI monitoring capability. 4.9W, IK03, IP20. Power Factor 0.49. Class II electrical construction.

PRODUCT OVERVIEW

IPC Code	0041759
Product name	SylSafe Exit-Mod EX 9 EM3 MT DA
Technology	LED
Type	LED
Mount	Wall mounted
General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	-
Luminaire efficacy (lm/W)	0
Photobiological Risk Group	-
Total power consumption (W)	4.9
Electrical protection	Class II
Control gear type	Emergency
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288417592
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0041759
Product name	SylSafe Exit-Mod EX 9 EM3 MT DA
Technology	LED
Type	LED
Mount	Wall mounted
General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002

© Feilo Sylvania | Date Printed: 13 Dec 2018

SylSafe EXIT Mod

SylSafe Exit-Mod EX 9 EM3 MT DA

0041759

ETIM Class	EC001957

Optical data

Fixture luminous flux (lm)	-
Luminaire efficacy (lm/W)	0
Photobiological Risk Group	-
Emergency duration (h)	3

Electrical data

Total power consumption (W)	4.9
Mains voltage (V)	230-240V~
Lamp power factor	0.49
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency
Drive current (mA)	60
kWh per 1000 hours burning time	5
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	35040

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	300
Nominal Product Width (mm)	101
Nominal Product Height (mm)	201
Weight (kg)	0.866

Packaging

Single packaging type	Carton
Product EAN number	5410288417592
Packaging single length / height (cm)	31.0
Packaging single width (cm)	22.6
Packaging single depth (cm)	4.4
DUN14 (outer)	05410288417592
Units per outer package	1
Packaging outer length / height (cm)	31.0
Packaging outer width (cm)	22.6
Packaging outer depth (cm)	4.4


TECHNICAL DRAWINGS


© Feilo Sylvania | Date Printed: 13 Dec 2018

SylSafe EXIT Mod

SylSafe Exit-Mod EX 9 EM3 MT DA

0041759



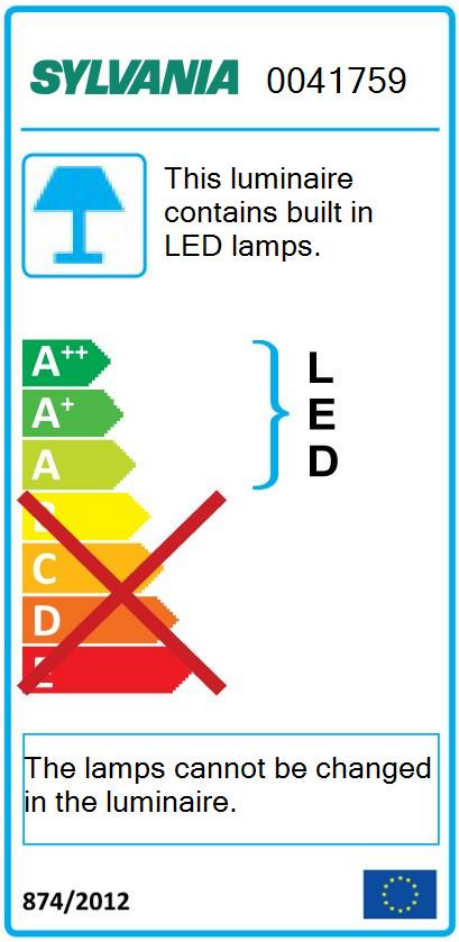


© Feilo Sylvania | Date Printed: 13 Dec 2018

SylSafe EXIT Mod

SylSafe Exit-Mod EX 9 EM3 MT DA

0041759

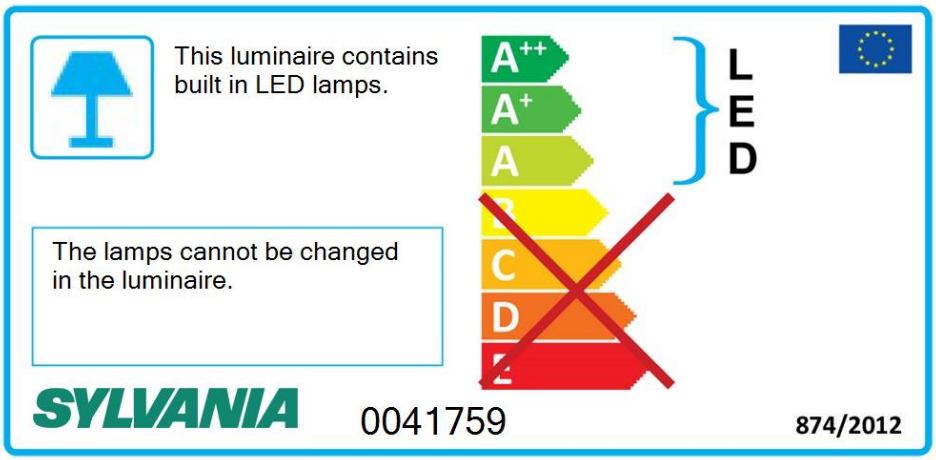

© Feilo Sylvania | Date Printed: 13 Dec 2018