


## Myriad V Solid State Pendant - Black - Remote Gear

MYRIAD PENDANT 4000K REMOTE PHDIM BLK  
2049598



### Product features

- High-end architectural (4000K) neutral white LED pendant with Phase dimmable driver and remote gear housing, finished in a black finish (RAL9005)

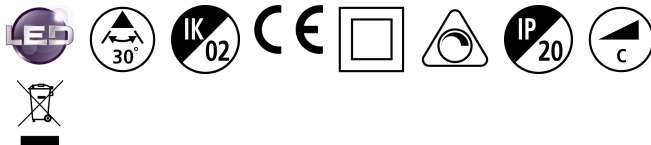

### PRODUCT OVERVIEW

|                             |                                                     |
|-----------------------------|-----------------------------------------------------|
| IPC Code                    | 2049598                                             |
| Product name                | MYRIAD PENDANT 4000K REMOTE PHDIM BLK               |
| Technology                  | LED                                                 |
| Mount                       | Ceiling pendant                                     |
| Environment                 | Interior                                            |
| General application         | Hospitality, Office, Residential & Consumer, Retail |
| Certifications              | EUNEW008                                            |
| ETIM Class                  | EC001743                                            |
| Fixture luminous flux (lm)  | 1093                                                |
| Luminaire efficacy (lm/W)   | 109.3                                               |
| LOR (%)                     | 100                                                 |
| Colour temperature (K)      | 4000                                                |
| Light colour                | Neutral White                                       |
| CRI (Ra)                    | 80                                                  |
| Beam Angle (°)              | 30                                                  |
| Photobiological Risk Group  | -                                                   |
| Total power consumption (W) | 10                                                  |
| Electrical protection       | Class II                                            |
| Control gear mounting       | Remote                                              |
| Dimmable                    | Yes                                                 |
| Housing colour              | Black                                               |
| IP rating                   | IP20                                                |
| IK rating                   | IK02                                                |
| Product EAN number          | 5025768495986                                       |
| Lamps                       | No                                                  |
| Included lamp               | INTEGRATED LED                                      |

### DATA TABLE

# Myriad V Solid State Pendant - Black - Remote Gear

*MYRIAD PENDANT 4000K REMOTE PHDIM BLK*  
2049598

## General data

|                     |                                                  |
|---------------------|--------------------------------------------------|
| IPC Code            | 2049598                                          |
| Product name        | MYRIAD PENDANT 4000K REMOTE PHDIM BLK            |
| Technology          | LED                                              |
| Mount               | Ceiling pendant                                  |
| Environment         | Interior                                         |
| General application | Hospitality,Office,Residential & Consumer,Retail |
| Certifications      | EUNEW008                                         |
| ETIM Class          | EC001743                                         |

## Optical data

|                            |                    |
|----------------------------|--------------------|
| Fixture luminous flux (lm) | 1093               |
| Luminaire efficacy (lm/W)  | 109.3              |
| LOR (%)                    | 100                |
| Colour temperature (K)     | 4000               |
| Light colour               | Neutral White      |
| CRI (Ra)                   | 80                 |
| Adjustable chromaticity    | N                  |
| Beam Angle (°)             | 30                 |
| Distribution type          | Direct symmetrical |
| Photobiological Risk Group | -                  |

## Electrical data

|                             |           |
|-----------------------------|-----------|
| Total power consumption (W) | 10        |
| Mains voltage (V)           | 220-240V~ |
| Electrical protection       | Class II  |
| Control gear mounting       | Remote    |
| Transformer required        | Yes       |
| Dimmable                    | Yes       |
| Nominal Frequency (Hz)      | 50/60Hz   |

## Lifetime data

|                             |       |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
|-----------------------------|-------|

## Physical data

|                             |       |
|-----------------------------|-------|
| Housing colour              | Black |
| IP rating                   | IP20  |
| IK rating                   | IK02  |
| Nominal Product Width (mm)  | 75    |
| Nominal Product Height (mm) | 129   |
| Max. Lamp Diameter (mm) - D | 75    |
| Weight (kg)                 | 0.45  |

## Packaging


|                                       |               |
|---------------------------------------|---------------|
| Single packaging type                 | Carton        |
| Product EAN number                    | 5025768495986 |
| Packaging single length / height (cm) | 17.5          |
| Packaging single width (cm)           | 15.0          |
| Packaging single depth (cm)           | 17.5          |

## Myriad V Solid State Pendant - Black - Remote Gear

MYRIAD PENDANT 4000K REMOTE PHDIM BLK  
2049598

|                                      |                |
|--------------------------------------|----------------|
| DUN14 (outer)                        | 05025768495986 |
| Units per outer package              | 1              |
| Packaging outer length / height (cm) | 17.5           |
| Packaging outer width (cm)           | 15.0           |
| Packaging outer depth (cm)           | 17.5           |


### PHOTOMETRY

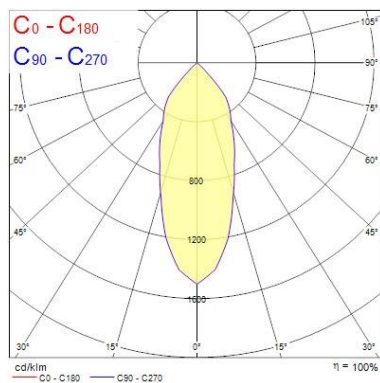

| Distance [m] | Cone diameter [m] | Beam angle [°] | Illuminance [lx] |
|--------------|-------------------|----------------|------------------|
| 0.5          | 0.36              | 19.8°          | 6567             |
| 1.0          | 0.71              | 19.8°          | 1642             |
| 1.5          | 1.07              | 19.8°          | 730              |
| 2.0          | 1.42              | 19.8°          | 410              |
| 2.5          | 1.78              | 19.8°          | 263              |
| 3.0          | 2.14              | 19.8°          | 182              |

C0 - C180 (Half beam angle: 39.2°)

### TECHNICAL DRAWINGS



## Myriad V Solid State Pendant - Black - Remote Gear MYRIAD PENDANT 4000K REMOTE PHDIM BLK 2049598

