

Start Highbay DALI

START Highbay IP65 DALI 19000lm 840 WB

0039366



Product features

- START Highbay, includes 1 m cables, black aluminium housing, 19,500 Lm, 150 W, 130 Lm/W, 6500 K, drive current: 3300 mA, CRI 80, 90° beam angle, DALI dimmable, IP65, IK08, 50,000 hrs (L80/B50), (D x H) 296 x 172 mm.



PRODUCT OVERVIEW

IPC Code	0039366
Product name	START Highbay IP65 DALI 19000lm 840 WB
Technology	LED
Housing	Aluminium alloy
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC001716
E-number FI	4309000
E-number SE	7214426
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	90
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	150
Electrical protection	Class I
Control gear type	DALI
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288393667
Lamps	Yes
Included lamp	INTEGRATED LED

Start Highbay DALI

START Highbay IP65 DALI 19000lm 840 WB

0039366

DATA TABLE

General data

IPC Code	0039366
Product name	START Highbay IP65 DALI 19000lm 840 WB
Technology	LED
Housing	Aluminium alloy
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30 to +50
Certifications	EUNEW009
ETIM Class	EC001716
E-number FI	4309000
E-number SE	7214426

Optical data

Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	90
Distribution type	Direct
Glare control	< 26
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	150
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear type	DALI
Dimmable	Yes
Drive current (mA)	3300
Inrush Current (A)	65
Inrush Duration (µs)	550
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	4
Max. Luminaires per 13A C Breaker	5
Max. Luminaires per 16A C Breaker	7
Max. Luminaires per 20A C Breaker	8

Start Highbay DALI

START Highbay IP65 DALI 19000lm 840 WB

0039366

Lifetime data

Lumen maintenance - L70 B50	54000
Lumen maintenance - L70 B20	54000
Lumen maintenance - L70 B10	54000
Lumen maintenance - L80 B50	50000
Lumen maintenance - L80 B20	50000
Lumen maintenance - L80 B10	50000
Lumen maintenance - L90 B50	23000
Lumen maintenance - L90 B20	23000
Lumen maintenance - L90 B10	23000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	296
Nominal Product Width (mm)	296
Nominal Product Height (mm)	172
Nominal Product Diameter (mm)	296
Weight (kg)	3.4

Packaging


Single packaging type	Carton
Product EAN number	5410288393667
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	17.7
DUN14 (outer)	05410288393667
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	17.7

PHOTOMETRY

Start Highbay DALI

START Highbay IP65 DALI 19000lm 840 WB

0039366

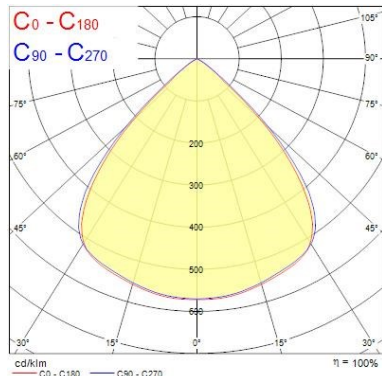


Distance [m]	Cone diameter [m]	E (0°)	E (C90)	E (C0)
0.5	0.99 0.95	43469	44.8° 7889	43.8° 8325
1.0	1.97 1.90	10867	44.8° 1973	43.8° 2081
1.5	2.96 2.85	4830	44.8° 877	43.8° 925
2.0	3.94 3.81	2717	44.8° 490	43.8° 520
2.5	4.93 4.76	1739	44.8° 316	43.8° 335
3.0	5.92 5.71	1207	44.8° 219	43.8° 231

Distance [m] Cone diameter [m]

— C0 - C180 (Half beam angle: 87.2°)

— C90 - C270 (Half beam angle: 85.2°)

Illuminance [lx]

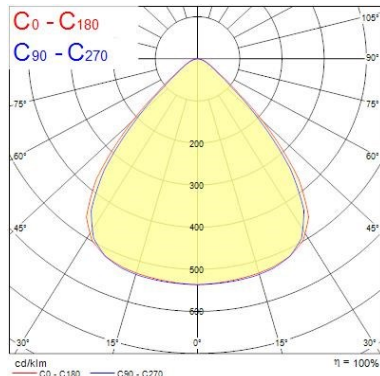

Distance [m]	Cone diameter [m]	E (0°)	E (C90)	E (C0)
0.5	0.99 0.95	43469	44.8° 7889	43.8° 8325
1.0	1.97 1.90	10867	44.8° 1973	43.8° 2081
1.5	2.96 2.85	4830	44.8° 877	43.8° 925
2.0	3.94 3.81	2717	44.8° 490	43.8° 520
2.5	4.93 4.76	1739	44.8° 316	43.8° 335
3.0	5.92 5.71	1207	44.8° 219	43.8° 231

Distance [m] Cone diameter [m]

— C0 - C180 (Half beam angle: 87.2°)

— C90 - C270 (Half beam angle: 85.2°)

Illuminance [lx]

Distance [m]	Cone diameter [m]	E (0°)	E (C90)	E (C0)
0.5	0.96 0.96	39730	43.7° 7542	43.8° 7741
1.0	1.91 1.92	9933	43.7° 1911	43.8° 1905
1.5	2.87 2.88	4414	43.7° 549	43.8° 560
2.0	3.82 3.84	2483	43.7° 478	43.8° 484
2.5	4.78 4.75	1589	43.7° 306	43.8° 310
3.0	5.73 5.75	1104	43.7° 212	43.8° 215

Distance [m] Cone diameter [m]

— C0 - C180 (Half beam angle: 87.0°)

— C90 - C270 (Half beam angle: 87.4°)

Illuminance [lx]

Distance [m]	Cone diameter [m]	E (0°)	E (C90)	E (C0)
0.5	0.93 0.97	40734	42.8° 8083	44.0° 7806
1.0	1.85 1.93	10164	42.8° 2013	44.0° 1901
1.5	2.78 2.90	4526	42.8° 896	44.0° 845
2.0	3.70 3.86	2546	42.8° 503	44.0° 479
2.5	4.63 4.93	1629	42.8° 322	44.0° 354
3.0	5.56 5.79	1132	42.8° 224	44.0° 211

Distance [m] Cone diameter [m]

— C0 - C180 (Half beam angle: 88.0°)

— C90 - C270 (Half beam angle: 95.6°)

Illuminance [lx]


Distance [m]	Cone diameter [m]	E (0°)	E (C90)	E (C0)
0.5	0.99 0.95	43469	44.8° 7889	43.8° 8325
1.0	1.97 1.90	10867	44.8° 1973	43.8° 2081
1.5	2.96 2.85	4830	44.8° 877	43.8° 925
2.0	3.94 3.81	2717	44.8° 490	43.8° 520
2.5	4.93 4.76	1739	44.8° 316	43.8° 335
3.0	5.92 5.71	1207	44.8° 219	43.8° 231

Distance [m] Cone diameter [m]

— C0 - C180 (Half beam angle: 87.2°)

— C90 - C270 (Half beam angle: 85.2°)



Illuminance [lx]

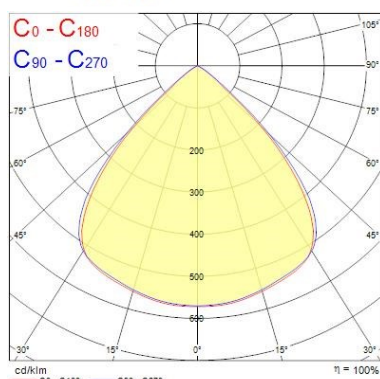

Start Highbay DALI

START Highbay IP65 DALI 19000lm 840 WB
0039366

TECHNICAL DRAWINGS

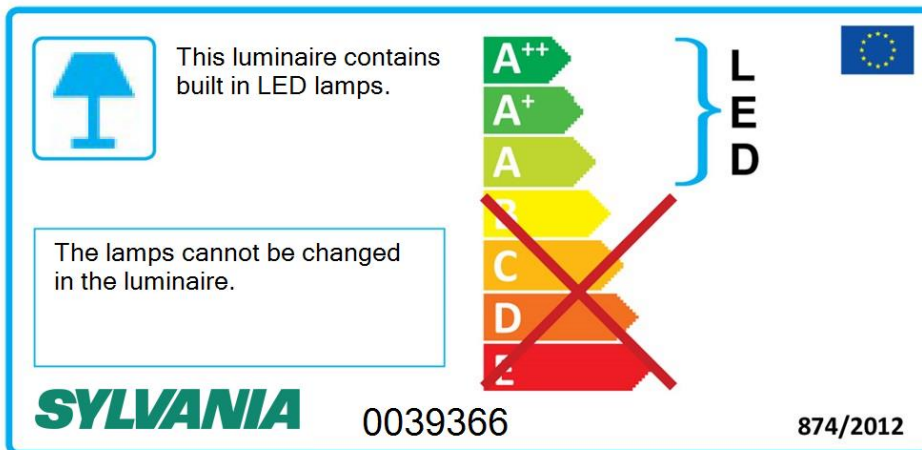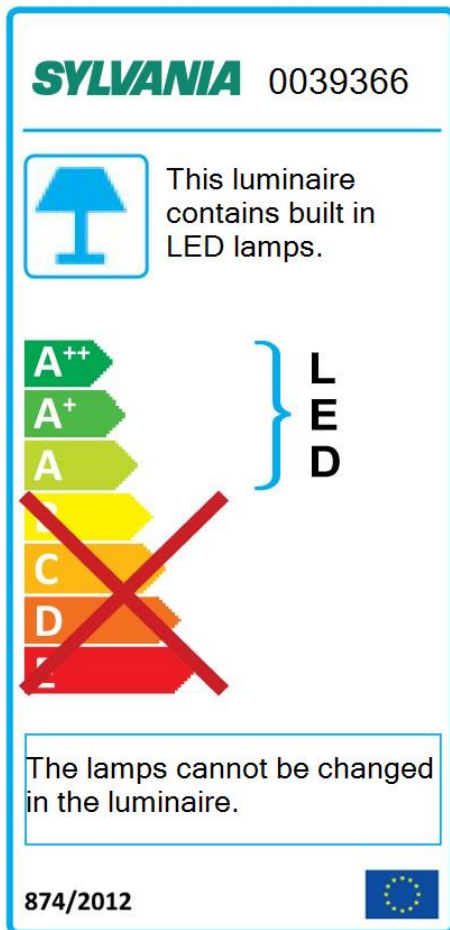



Start Highbay DALI

START Highbay IP65 DALI 19000lm 840 WB

0039366
