Officelyte Classic Fluorescent
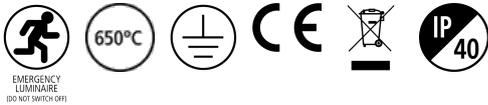*OfficeLyte Classic FLUO 1x55W DALI EM*
2057431

Product features

- OfficeLyte Classic FLUO 1x55W DALI EM

EMERGENCY LUMINAIRE (DO NOT SWITCH OFF) · 650°C · CE · IP40

PRODUCT OVERVIEW

IPC Code	2057431
Product name	OfficeLyte Classic FLUO 1x55W DALI EM
Technology	Fluorescent
Housing	Zintec Steel
Mount	Ceiling recessed
Environment	Integral
General application	Office
Certifications	EUNEW001
ETIM Class	EC002892
Fixture luminous flux (lm)	3285
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Glare control	UGR < 19
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	Electronic
Minimum dimming level (%)	100
Average life (Nominal) (h)	50000
Housing colour	White RAL 9010
IP rating	IP40
Product EAN number	5025768574315
Included lamp	0025660

DATA TABLE

General data

IPC Code	2057431
Product name	OfficeLyte Classic FLUO 1x55W DALI EM
Technology	Fluorescent
Housing	Zintec Steel
Mount	Ceiling recessed
Environment	Integral

Officelyte Classic Fluorescent
OfficeLyte Classic FLUO 1x55W DALI EM
2057431

General application	Office
Certifications	EUNEW001
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	3285
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Adjustable chromaticity	N
Distribution type	Direct/Indirect
Glare control	UGR < 19
Emergency duration (h)	3

Electrical data

Total power consumption (W)	58
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	100
Glow Wire Test (°C)	650

Lifetime data

Average life (Nominal) (h)	50000

Physical data

|	
Housing colour	White RAL 9010
IP rating	IP40
Diffuser finish	Satin
Diffuser material	Acrylic
Reflector finish	Micro Prismatic
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	145
Weight (kg)	6.5
Recessed Depth (mm)	105

Packaging

Single packaging type	Carton
Product EAN number	5025768574315
Packaging single length / height (cm)	62.0
Packaging single width (cm)	62.0
Packaging single depth (cm)	17.0
DUN14 (outer)	05025768574315
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	62.0
Packaging outer depth (cm)	17.0

Officelyte Classic Fluorescent
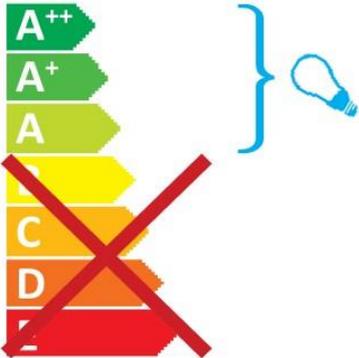*OfficeLyte Classic FLUO 1x55W DALI EM*
2057431

PHOTOMETRY

TECHNICAL DRAWINGS

Concord 2057431

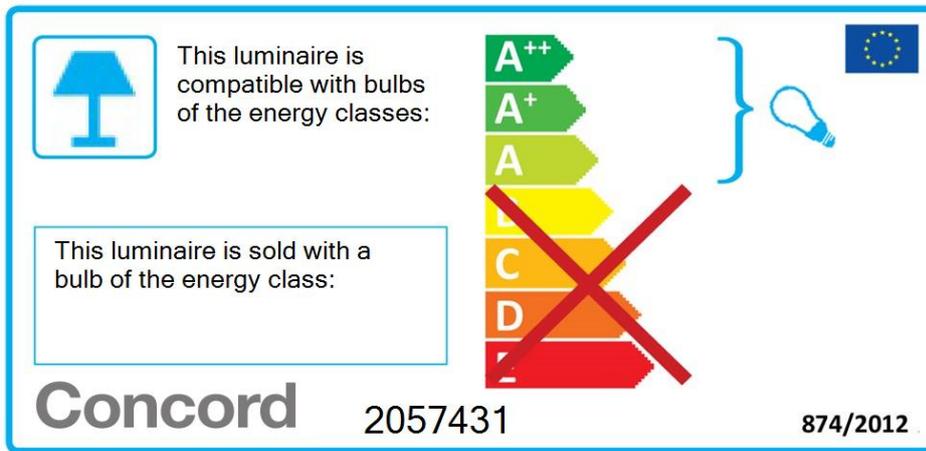This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

This luminaire is sold with a bulb of the energy class:

874/2012

Officelyte Classic Fluorescent
OfficeLyte Classic FLUO 1x55W DALI EM
2057431

This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class:

CONCORD 2057431 874/2012