

Sylproof Superia LED G3 Emergency

SYLPROOF SUPERIA LED G3 1500MM TWIN 6K E3

0070748



Product features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1578 mm x W 110 mm x H 78 mm size, Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 3 hour emergency, 6500K, CRI80, 6700 lm, 49 W, 135 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.



PRODUCT OVERVIEW

IPC Code	0070748
Product name	SYLPROOF SUPERIA LED G3 1500MM TWIN 6K E3
Technology	LED
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109
Fixture luminous flux (lm)	6800
Luminaire efficacy (lm/W)	139
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	265
Total power consumption (W)	49
Electrical protection	Class I
IP rating	IP65
IK rating	IK08
Product EAN number	5410288707488
Lamps	Yes

DATA TABLE

General data

IPC Code	0070748
Product name	SYLPROOF SUPERIA LED G3 1500MM TWIN 6K E3
Technology	LED
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	6800
Luminaire efficacy (lm/W)	139

Sylproof Superia LED G3 Emergency

SYLPROOF SUPERIA LED G3 1500MM TWIN 6K E3
0070748

Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	265
Emergency duration (h)	3

Electrical data

Total power consumption (W)	49
Mains voltage (V)	220-240V~
Electrical protection	Class I
Drive current (mA)	300
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	60000
-----------------------------	-------

Physical data





IP rating	IP65
IK rating	IK08
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.6

Packaging

Single packaging type	Carton
Product EAN number	5410288707488
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288707488
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

PHOTOMETRY

Sylproof Superia LED G3 Emergency
SYLPROOF SUPERIA LED G3 1500MM TWIN 6K E3
0070748

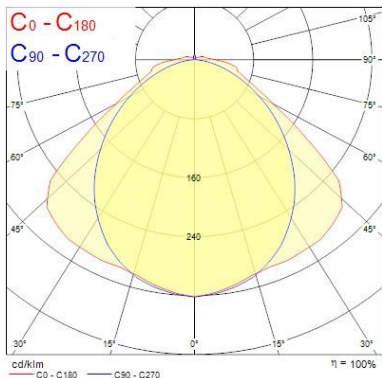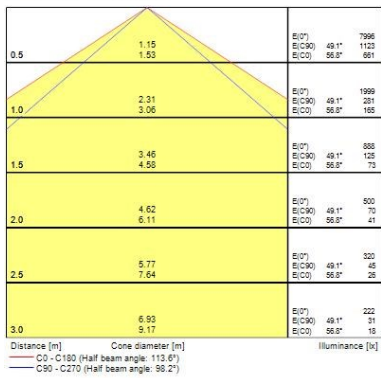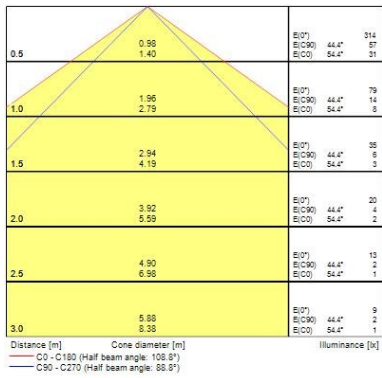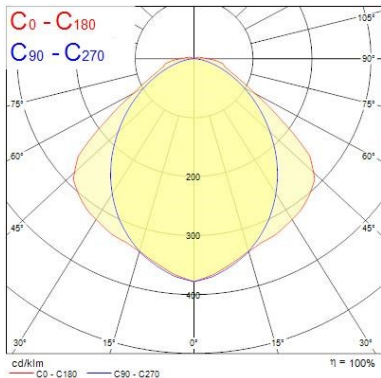

Sylproof Superia LED G3 Emergency SYLPROOF SUPERIA LED G3 1500MM TWIN 6K E3 0070748

