

Sylproof Superia LED G3 Quick connector

SYLPROOF SUPERIA LED G3 600mm Single 4K QC
0048734



Product features

- Sylproof Superia, integrated LED weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, Polycarbonate diffuser, Non dimmable, 4000K, CRI80, 1850 lm, 14 W, 130 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.



PRODUCT OVERVIEW

IPC Code	0048734
Product name	SYLPROOF SUPERIA LED G3 600mm Single 4K QC
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC000109
Fixture luminous flux (lm)	1850
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	14
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487342
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0048734
----------	---------

Sylproof Superia LED G3 Quick connector

SYLPROOF SUPERIA LED G3 600mm Single 4K QC
0048734

Product name	SYLPROOF SUPERIA LED G3 600mm Single 4K QC
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +40°C
Certifications	EUNEW009
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	1850
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	14
Mains voltage (V)	220-240V~
Mains frequency (Hz)	0/50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	300
Inrush Current (A)	3.06
Inrush Duration (µs)	35
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	104
Max. Luminaires per 13A C Breaker	139
Max. Luminaires per 16A C Breaker	173
Max. Luminaires per 20A C Breaker	208
Max. Luminaires per 10A B Breaker	87
Max. Luminaires per 13A B Breaker	113
Max. Luminaires per 16A B Breaker	139
Max. Luminaires per 20A B Breaker	173

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

Sylproof Superia LED G3 Quick connector SYLPROOF SUPERIA LED G3 600mm Single 4K QC 0048734

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	665
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	1.12

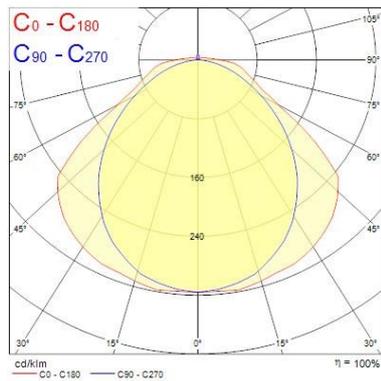
Packaging

Single packaging type	Carton
Product EAN number	5410288487342
Packaging single length / height (cm)	77.5
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487342
Units per outer package	1
Packaging outer length / height (cm)	77.5
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

Safety data

Dry applications use only	No
---------------------------	----

PHOTOMETRY



Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]	E ₃ [lx]
0.5	1.16 1.57	2348	49.3° 327	57.5° 154	
1.0	2.33 3.14	587	49.3° 82	57.5° 48	
1.5	3.49 4.71	251	49.3° 38	57.5° 23	
2.0	4.65 6.28	147	49.3° 23	57.5° 12	
2.5	5.81 7.85	94	49.3° 13	57.5° 7	
3.0	6.98 9.42	65	49.3° 9	57.5° 5	

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 115.0°)
 — C90 - C270 (Half beam angle: 96.6°)

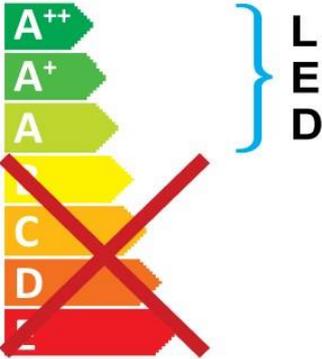
TECHNICAL DRAWINGS



Sylproof Superia LED G3 Quick connector SYLPROOF SUPERIA LED G3 600mm Single 4K QC 0048734

SYLVANIA 0048734

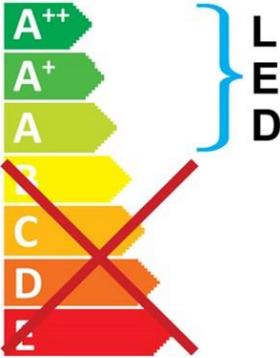
 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0048734  874/2012