

Sylproof Superia LED G3 Quick connector

SYLPROOF SUPERIA LED G3 1200mm S 4K QC SSH01
0048746



Product features

- Sylproof Superia, integrated LED weatherproof luminaire including SylSmart Connected Building (SSH) technology with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 4000K, CRI80, 3900 lm, 26 W, 150 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.



PRODUCT OVERVIEW

IPC Code	0048746
Product name	SYLPROOF SUPERIA LED G3 1200mm S 4K QC SSH01
Technology	LED
Housing	Polycarbonate
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW023
ETIM Class	EC000109
Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	Yes
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487465
Lamps	Yes

DATA TABLE

General data

IPC Code	0048746
Product name	SYLPROOF SUPERIA LED G3 1200mm S 4K QC SSH01

Sylproof Superia LED G3 Quick connector

SYLPROOF SUPERIA LED G3 1200mm S 4K QC SSH01
0048746

Technology	LED
Housing	Polycarbonate
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +35°C
Certifications	EUNEW023
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	28
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	Yes
Drive current (mA)	300
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	DC/50/60Hz

Lifetime data

Lumen maintenance - L70 B50	60000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1350
Nominal Product Width (mm)	84
Nominal Product Height (mm)	75
Weight (kg)	1.79

Packaging

Single packaging type	Carton
-----------------------	--------

Sylproof Superia LED G3 Quick connector *SYLPROOF SUPERIA LED G3 1200mm S 4K QC SSH01* 0048746


Product EAN number	5410288487465
Packaging single length / height (cm)	137.2
Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487465
Units per outer package	1
Packaging outer length / height (cm)	137.2
Packaging outer width (cm)	8.8
Packaging outer depth (cm)	8.4

Safety data

Dry applications use only	No
---------------------------	----

SYLVANIA 0048746

 This luminaire contains built in LED lamps.

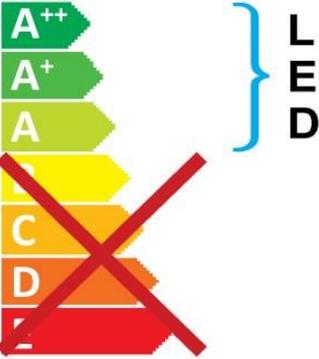

The lamps cannot be changed in the luminaire.

874/2012 

Sylproof Superia LED G3 Quick connector *SYLPROOF SUPERIA LED G3 1200mm S 4K QC SSH01* 0048746

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0048746 874/2012

A vertical energy efficiency scale is shown with levels A++, A+, A, B, C, D, and E. A red 'X' is drawn over the B, C, D, and E levels. A blue bracket on the right side of the scale groups the A++, A+, and A levels under the label 'LED'. A small European Union flag is located in the top right corner of the label.