

## Beacon LED Major II

### BEACON MAJOR II 3000K FLOOD L1 WHITE

#### 2059880



#### Product features

- Integrated AC LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 48° flood, optics: polycarbonate reflector, colour temperature: 3000K warm white, total system power: 19W, total fixture output: 1656lm, luminaire efficacy: 87lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 48,000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, mains dimmable, trailing or leading edge dimmable, power factor: 0.9 electrical protection: CLASS I, 1-circuit track adaptor, suitable for Concord Lytespan 1 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø79x118x140mm, weight: 0.40kg.



#### PRODUCT OVERVIEW

IPC Code	2059880
Product name	BEACON MAJOR II 3000K FLOOD L1 WHITE
Technology	LED
Housing	ALUMINIUM
Mount	L1 TRACK
General application	Retail,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260818
E-number SE	7416218
Fixture luminous flux (lm)	1656
Luminaire efficacy (lm/W)	87
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	48
Glare control	UGR>19
Photobiological Risk Group	RG01
Total power consumption (W)	19
Product Voltage (V)	240
Electrical protection	Class I
Dimmable	Yes
Housing colour	WHITE - RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768598809
Lamps	No
Included lamp	INTEGRATED LED

## Beacon LED Major II

*BEACON MAJOR II 3000K FLOOD L1 WHITE*  
2059880

### DATA TABLE

#### General data

IPC Code	2059880
Product name	BEACON MAJOR II 3000K FLOOD L1 WHITE
Technology	LED
Housing	ALUMINIUM
Mount	L1 TRACK
General application	Retail,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260818
E-number SE	7416218

#### Optical data

Fixture luminous flux (lm)	1656
Luminaire efficacy (lm/W)	87
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	48
Beam angle (Rated) (°)	48
Distribution type	FLOOD
Glare control	UGR>19
Photobiological Risk Group	RG01

#### Electrical data

Total power consumption (W)	19
Mains voltage (V)	230-240V~
Product Voltage (V)	240
Electrical protection	Class I
Control gear required	No
Dimmable	Yes
Drive current (mA)	0
Nominal Frequency (Hz)	50/60Hz

#### Lifetime data

Lumen maintenance - L70 B50	48000
-----------------------------	-------

#### Physical data

Housing colour	WHITE - RAL9016
IP rating	IP20
IK rating	IK02
Reflector finish	METALISED
Nominal Product Width (mm)	106
Nominal Product Height (mm)	140

## Beacon LED Major II


*BEACON MAJOR II 3000K FLOOD L1 WHITE*  
2059880

Nominal Product Diameter (mm)	79
Weight (kg)	0.915

### Packaging

Single packaging type	Carton
Product EAN number	5025768598809
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	5025768598809
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


## PHOTOMETRY

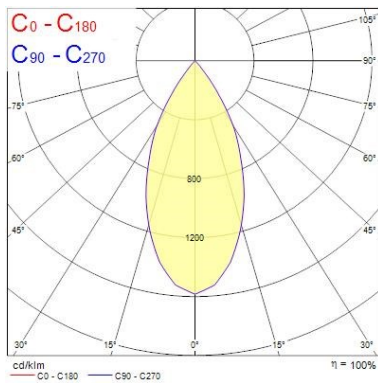

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1/2</sub> [lx]	E <sub>1/10</sub> [lx]
0.5	0.44	10491	2337	4221
1.0	0.88	2623	583	1055
1.5	1.32	1186	261	447
2.0	1.76	696	156	281
2.5	2.21	432	97	181
3.0	2.65	291	65	112


Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 47.8°)


## TECHNICAL DRAWINGS




## Beacon LED Major II BEACON MAJOR II 3000K FLOOD L1 WHITE 2059880


**Concord** 2059880


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**Concord** 2059880  874/2012