

ToLEDo Vintage CANDLE

TOLEDO™ VINTAGE CANDLE 125LM 820 E14 BL

0028011



Product features

- New and innovative Flexible Filament Chip Technology (FFCT) designed to create the low-lit vintage effect.
- Perfect for hotels, restaurants, heritage lighting, bars and decorative applications.
- The ideal LED solution to replace incandescent vintage candle lamp.
- Low glare - suitable for low height installation.
- 2000K colour temperature, to create a cosy ambience.
- Golden tinted glass envelope.
- 15,000 hours average rated life. Last 7.5 times longer than incandescent vintage lamps.
- Unique filament construction design - 'Cord' shape.
- Omni-directional light distribution - 300°.
- Low-lumen output to create low-lit effect - 125lm.
- More than 100,000X switching cycles.
- 3 years warranty.
- Environment friendly - no mercury and lower CO2 emissions.



PRODUCT OVERVIEW

IPC Code	0028011
Product name	TOLEDO™ VINTAGE CANDLE 125LM 820 E14 BL
Technology	LED
Watt (Rated) (W)	2.3
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer,
Certifications	EUTIE103
ETIM Class	EC001959
Luminous flux (lm)	125
Colour temperature (K)	2000
Light colour	Candlelight
CRI (Ra)	80
Wattage (W)	2.3
Product Voltage (V)	230
Average life (Nominal) (h)	15000
Product EAN number	5410288280110

DATA TABLE

General data

IPC Code	0028011
Product name	TOLEDO™ VINTAGE CANDLE 125LM 820 E14 BL
Technology	LED
Watt (Rated) (W)	2.3
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer,
Operating temperature rated (°C)	25
Certifications	EUTIE103
ETIM Class	EC001959

Optical data

ToLEDo Vintage CANDLE

TOLEDO™ VINTAGE CANDLE 125LM 820 E14 BL

0028011

Luminous flux (lm)	125
Luminous flux (Rated) (lm)	125
Colour temperature (K)	2000
Light colour	Candlelight
Colour Code	820
CRI (Ra)	80
Beam angle (Rated) (°)	360

Electrical data

Wattage (W)	2.3
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Product Voltage (V)	230
Lamp power factor	0.5
No. Of switching cycles before premature failures	50000
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	3
Nominal Frequency (Hz)	50Hz

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	97
Nominal Product Diameter (mm)	35
Weight (kg)	0.095

Packaging

Single packaging type	Mix blister(20% carton, 80% pl)
Product EAN number	5410288280110
Packaging single length / height (cm)	14.0
Packaging single width (cm)	12.0
Packaging single depth (cm)	0.01
DUN14 (inner)	25410288280114
Units per inner package	6
Packaging inner length / height (cm)	26.5
Packaging inner width (cm)	9.5
Packaging inner depth (cm)	16.2
DUN14 (outer)	15410288280117
Units per outer package	60
Packaging outer length / height (cm)	50.5
Packaging outer width (cm)	28.0
Packaging outer depth (cm)	35.0

Safety data

Breakage cleaning instructions	Not applicable
--------------------------------	----------------

ToLEDo Vintage CANDLE



TOLEDO™ VINTAGE CANDLE 125LM 820 E14 BL

0028011

Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

TECHNICAL DRAWINGS

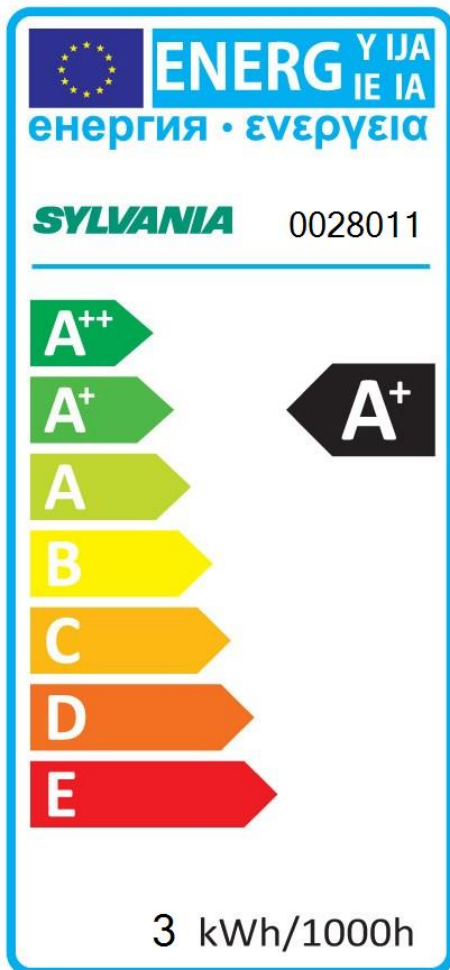



ToLEDo Vintage CANDLE

TOLEDO™ VINTAGE CANDLE 125LM 820 E14 BL

0028011
