ToLEDo Vintage G95

TOLEDO™ VINTAGE G95 250LM 820 E27 BL

0027985



Product features

- • New and innovative Flexible Filament Chip Technology (FFCT) designed to create the low-lit vintage effect. • Perfect for hotels, restaurants, heritage lighting, bars and decorative applications. • The ideal LED solution to replace incandescent vintage globe lamps. • Low glare – suitable for low height installation. • 2000K colour temperature, to create a cosy ambience. • Golden tinted glass envelope. • 15,000 hours average rated life. Last 7.5 times longer than incandescent vintage lamps. • Unique filament construction design – 'Helix' shape. • Omni-directional light distribution – 300°. • Low-lumen output to create low-lit effect – 250lm. • More than 100,000X switching cycles. • 3 years warranty. • Environment friendly – no mercury and lower CO2 emissions.

PRODUCT OVERVIEW

IPC Code	0027985
Product name	TOLEDO™ VINTAGE G95 250LM 820 E27 BL
Technology	LED
Watt (Rated) (W)	5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality,Residential & Consumer,
Certifications	EUTIE103
ETIM Class	EC001959
Luminous flux (lm)	250
Colour temperature (K)	2000
Light colour	Candlelight
CRI (Ra)	80
Wattage (W)	5
Product Voltage (V)	230
Average life (Nominal) (h)	15000
Product EAN number	5410288279855

DATA TABLE

General data

IPC Code	0027985
Product name	TOLEDO™ VINTAGE G95 250LM 820 E27 BL
Technology	LED
Watt (Rated) (W)	5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality,Residential & Consumer,
Operating temperature rated (°C)	25
Certifications	EUTIE103
ETIM Class	EC001959

Optical data

© Feilo Sylvania | Date Printed: 20 Dec 2018

ToLEDo Vintage G95

TOLEDO™ VINTAGE G95 250LM 820 E27 BL

0027985

Luminous flux (lm)	250
Luminous flux (Rated) (lm)	250
Colour temperature (K)	2000
Light colour	Candlelight
Colour Code	820
CRI (Ra)	80
Beam angle (Rated) (°)	360

Electrical data

Wattage (W)	5
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Product Voltage (V)	230
Lamp power factor	0.5
No. Of switching cycles before premature failures	50000
Lamp Energy Label (class)	A
kWh per 1000 hours burning time	5
Nominal Frequency (Hz)	50Hz

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	140
Nominal Product Diameter (mm)	95
Weight (kg)	0.044

Packaging

Single packaging type	Mix blister(20% carton, 80% pl
Product EAN number	5410288279855
Packaging single length / height (cm)	12.3
Packaging single width (cm)	19.8
Packaging single depth (cm)	0.01
DUN14 (inner)	25410288279859
Units per inner package	6
Packaging inner length / height (cm)	63.5
Packaging inner width (cm)	10.8
Packaging inner depth (cm)	22.0
DUN14 (outer)	15410288279852
Units per outer package	60
Packaging outer length / height (cm)	65.0
Packaging outer width (cm)	57.0
Packaging outer depth (cm)	46.6

Safety data

Breakage cleaning instructions	Not applicable

© Feilo Sylvania | Date Printed: 20 Dec 2018

ToLEDo Vintage G95


TOLEDO™ VINTAGE G95 250LM 820 E27 BL


0027985

Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

TECHNICAL DRAWINGS



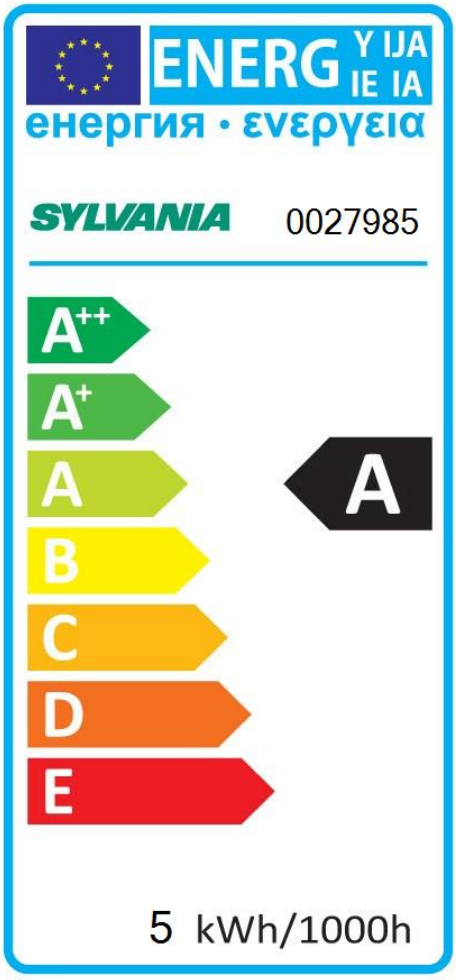

© Feilo Sylvania | Date Printed: 20 Dec 2018

ToLEDo Vintage G95

TOLEDO™ VINTAGE G95 250LM 820 E27 BL

0027985

© Feilo Sylvania | Date Printed: 20 Dec 2018