

Ascent 50 Round - 12 LED High Efficiency

ASCENT 50 RND HE DALI 3K
2052662



Product features

- ASCENT 50 RND HE DALI 3K



PRODUCT OVERVIEW

| | |
|-----------------------------|-----------------------------|
| IPC Code | 2052662 |
| Product name | ASCENT 50 RND HE DALI 3K |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Interior |
| General application | Museums & Galleries, Retail |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Photobiological Risk Group | - |
| Total power consumption (W) | 15 |
| Electrical protection | Class I |
| Control gear mounting | Integral |
| Housing colour | Aluminium |
| IP rating | IP23 |
| IK rating | IK02 |
| Product EAN number | 5025768526628 |
| Lamps | No |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|---------------------|-----------------------------|
| IPC Code | 2052662 |
| Product name | ASCENT 50 RND HE DALI 3K |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Interior |
| General application | Museums & Galleries, Retail |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |

Ascent 50 Round - 12 LED High Efficiency

ASCENT 50 RND HE DALI 3K
2052662

Optical data

| | |
|----------------------------|--------------------|
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Adjustable chromaticity | N |
| Distribution type | Direct symmetrical |
| Photobiological Risk Group | - |

Electrical data

| | |
|-----------------------------|----------|
| Total power consumption (W) | 15 |
| Mains voltage (V) | 230V~ |
| Electrical protection | Class I |
| Control gear mounting | Integral |
| Transformer required | Yes |
| Glow Wire Test (°C) | 960 |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
|-----------------------------|-------|

Physical data

| | |
|-----------------------------|-----------|
| Housing colour | Aluminium |
| IP rating | IP23 |
| IK rating | IK02 |
| Nominal Product Width (mm) | 130 |
| Nominal Product Height (mm) | 50 |
| Max. Lamp Diameter (mm) - D | 150 |
| Weight (kg) | 0.75 |
| Recessed Depth (mm) | 50 |


Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5025768526628 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| DUN14 (outer) | 05025768526628 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |


TECHNICAL DRAWINGS

Ascent 50 Round - 12 LED High Efficiency


ASCENT 50 RND HE DALI 3K
2052662




Concord 2052662



This luminaire contains built in LED lamps.

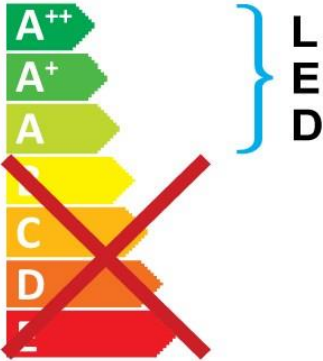

The lamps cannot be changed in the luminaire.

874/2012


Ascent 50 Round - 12 LED High Efficiency

ASCENT 50 RND HE DALI 3K
2052662

