


Kometa 300 LED

KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
2038595



Product features

- KOMETA 300 LED 3500LM 4000K DALI EM3 PRO



PRODUCT OVERVIEW

IPC Code	2038595
Product name	KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
Technology	LED
Housing	ALUMINIUM
Mount	RECESSED
Fixture rating	Enclosed
General application	Office,
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	3430
Luminaire efficacy (lm/W)	84
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<21
Photobiological Risk Group	RG01
Luminous flux (emergency) (lm)	383
Total power consumption (W)	25/16
Electrical protection	Class I
Control gear type	Electronic Emergency
Control gear mounting	REMOTE
Minimum dimming level (%)	1
Housing colour	WHITE - RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768385959
Lamps	No
Included lamp	INTEGRATED LED

Kometa 300 LED

KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
2038595

DATA TABLE

General data

IPC Code	2038595
Product name	KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
Technology	LED
Housing	ALUMINIUM
Mount	RECESSED
Fixture rating	Enclosed
General application	Office,
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	3430
Luminaire efficacy (lm/W)	84
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	AMBIENT & DOWNLIGHT
Glare control	<21
Photobiological Risk Group	RG01
Luminous flux (emergency) (lm)	383
Emergency duration (h)	3

Electrical data

Total power consumption (W)	25/16
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic Emergency
Control gear mounting	REMOTE
Minimum dimming level (%)	1
Drive current (mA)	350/700
Inrush Current (A)	65
Inrush Duration (µs)	140
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	20
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	32
Max. Luminaires per 20A C Breaker	40
Max. Luminaires per 10A B Breaker	11
Max. Luminaires per 13A B Breaker	14
Max. Luminaires per 16A B Breaker	18
Max. Luminaires per 20A B Breaker	22

Kometa 300 LED

KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
2038595

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L80 B50	50000
Lumen maintenance - L80 B10	50000
Lumen maintenance - L90 B50	36000



Physical data

Housing colour	WHITE - RAL9016
IP rating	IP20
IK rating	IK02
Diffuser finish	OPAL
Diffuser material	POLYCARBONATE
Reflector finish	SPECULAR
Nominal Product Length (mm)	300
Nominal Product Width (mm)	300
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	300
Weight (kg)	3.15

Packaging









Single packaging type	Carton
Product EAN number	5025768385959
Packaging single length / height (cm)	41.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	22.0
DUN14 (outer)	05025768385959
Units per outer package	1
Packaging outer length / height (cm)	41.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	22.0

PHOTOMETRY

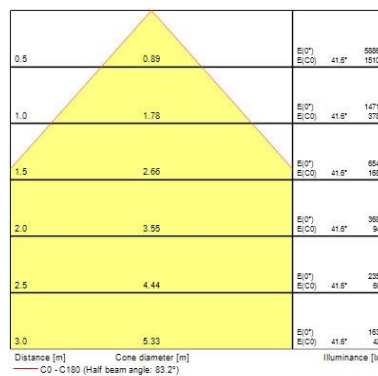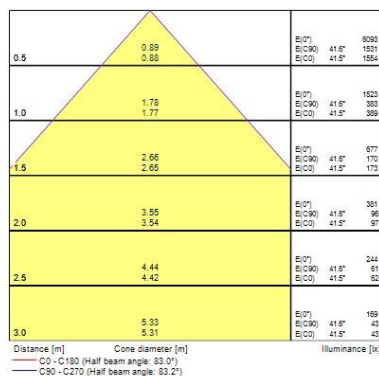

Kometa 300 LED

KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
2038595

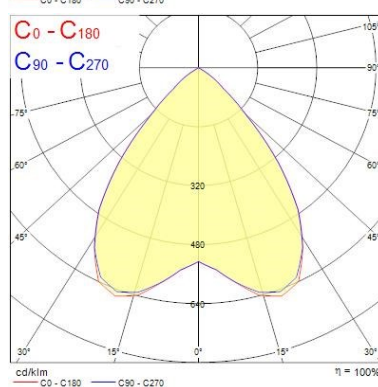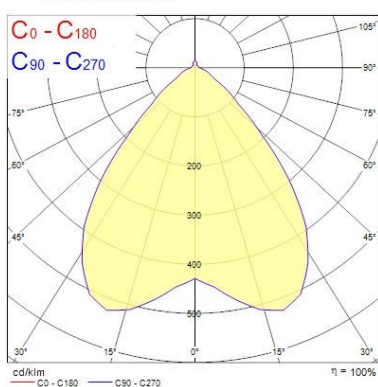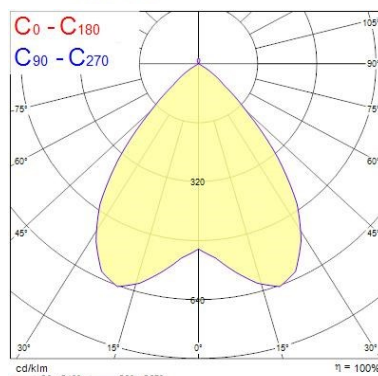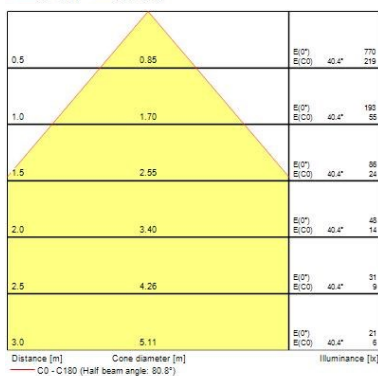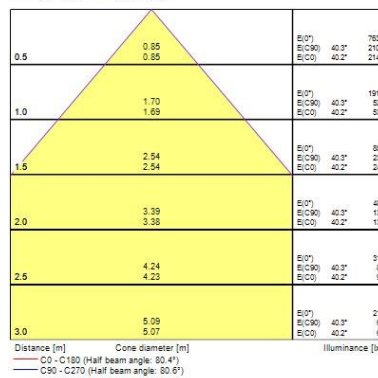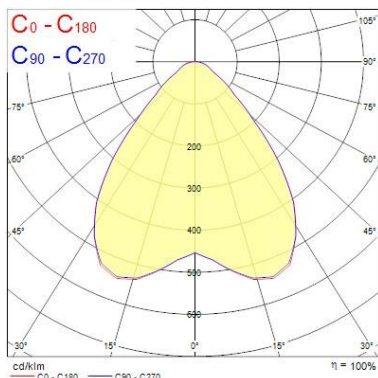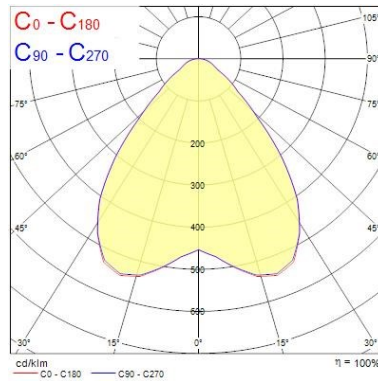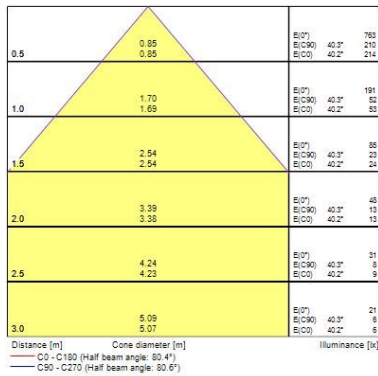


Kometa 300 LED

KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
2038595


0.5	0.89 0.88	E(0°) E(C90) E(C0)	41.8° 1551 1554
1.0	1.78 1.77	E(0°) E(C90) E(C0)	41.8° 1523 385 359
1.5	2.66 2.65	E(0°) E(C90) E(C0)	41.8° 877 170 173
2.0	3.55 3.54	E(0°) E(C90) E(C0)	41.8° 381 96 97
2.5	4.44 4.42	E(0°) E(C90) E(C0)	41.8° 244 61 52
3.0	5.33 5.31	E(0°) E(C90) E(C0)	41.8° 169 43 43

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 83.0°)
— C90 - C270 (Half beam angle: 83.2°)

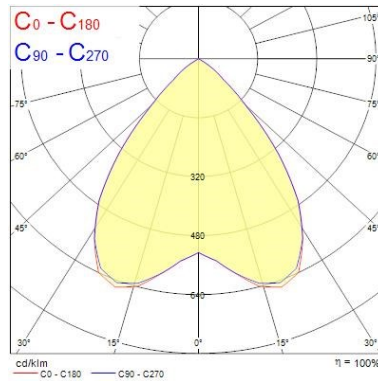

TECHNICAL DRAWINGS



Kometa 300 LED

KOMETA 300 LED 3500LM 4000K DALI EM3 PRO
2038595

