Optimo Small - LED


Optimo Small LED WW LS3 WH

3089922



Product features

- Compact integrated LED spotlight for three curcuit track (LS3) with unique 2 tone colour combinations made possible by body and trim concept. The twist and lock bezel design allows for quick and easy replacement of reflectors and / or filter. Die-cast aluminium body, 1,470LM, 16W, 92lm/W, 3000K, Driver Current: 450mA, CRI80, 36° beam angle, Non-dimmable LED driver, IP20, IK02, 50,000 hrs (L70), (HxDxW) 92x100x 55mm, 3 step MacAdam ellipse, 0.8kg, Matt White and Matt black, Class 2, 220-240V, energy class: A++, A+, A

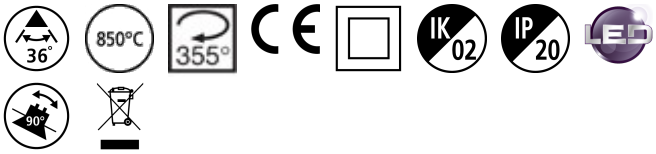

PRODUCT OVERVIEW

IPC Code	3089922
Product name	Optimo Small LED WW LS3 WH
Technology	LED
Housing	Die cast aluminium
Mount	LS3
Environment	Interior
General application	Retail
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4170083
E-number SE	7416926
Fixture luminous flux (lm)	1470
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	50000
Housing colour	Black/Matte white
IP rating	IP20
IK rating	IK02
Product EAN number	8711971899228
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	3089922

© Feilo Sylvania | Date Printed: 21 Dec 2018

Optimo Small - LED

Optimo Small LED WW LS3 WH

3089922

Product name	Optimo Small LED WW LS3 WH
Technology	LED
Housing	Die cast aluminium
Mount	LS3
Environment	Interior
General application	Retail
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4170083
E-number SE	7416926

Optical data

Fixture luminous flux (lm)	1470
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	36
Distribution type	Direct
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	16
Equivalent watt (W)	20
Electrical protection	Class II
Control gear type	Electronic
Drive current (mA)	450
Inrush Current (A)	20
Inrush Duration (µs)	400
Glow Wire Test (°C)	850
Max. Luminaires per 16A C Breaker	40

Lifetime data

Average life (Nominal) (h)	50000

Physical data

Vertical Tilt (°)	90
Horizontal rotation (°)	355
Housing colour	Black/Matte white
IP rating	IP20
IK rating	IK02
Weight (kg)	0.8

Packaging

Single packaging type	Carton
Product EAN number	8711971899228

© Feilo Sylvania | Date Printed: 21 Dec 2018


Optimo Small - LED


Optimo Small LED WW LS3 WH


3089922


Packaging single length / height (cm)	17.5
Packaging single width (cm)	17.7
Packaging single depth (cm)	17.2
DUN14 (outer)	08711971899228
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	17.7
Packaging outer depth (cm)	17.2


PHOTOMETRY

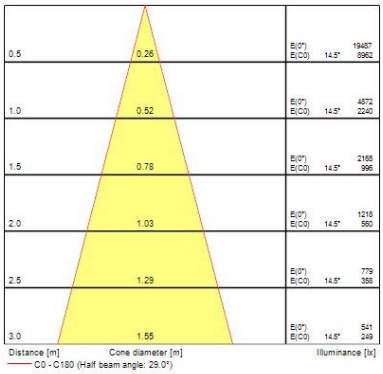


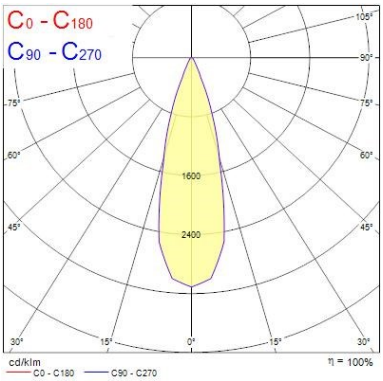

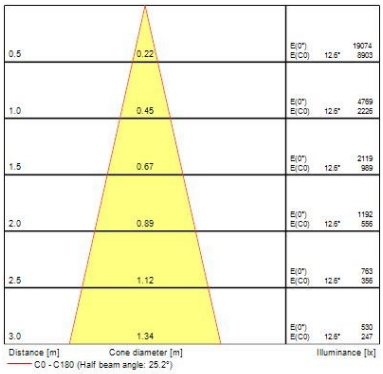

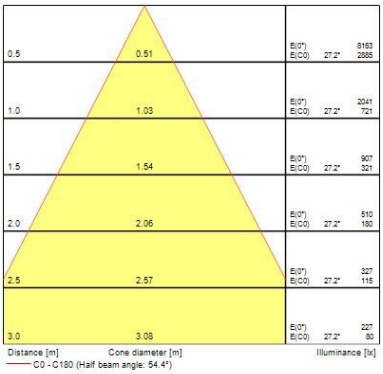

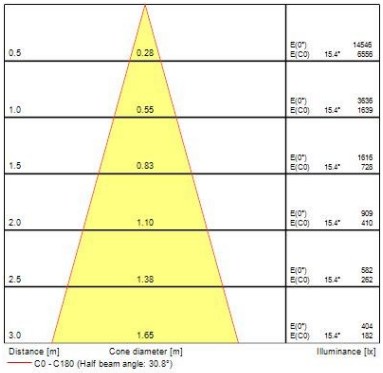

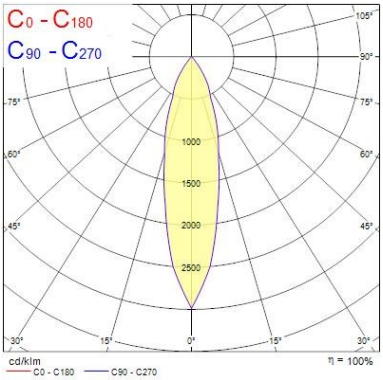



© Feilo Sylvania | Date Printed: 21 Dec 2018

Optimo Small - LED


Optimo Small LED WW LS3 WH

3089922

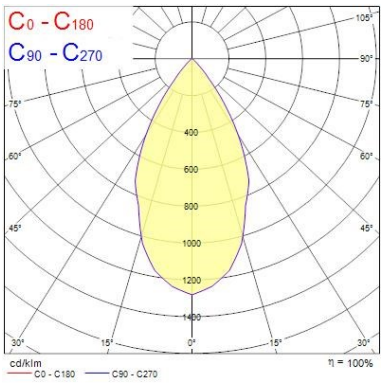

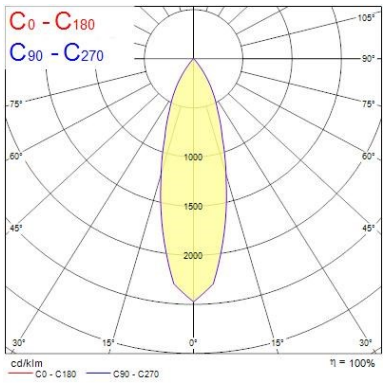

TECHNICAL DRAWINGS





© Feilo Sylvania | Date Printed: 21 Dec 2018

Optimo Small - LED

Optimo Small LED WW LS3 WH

3089922

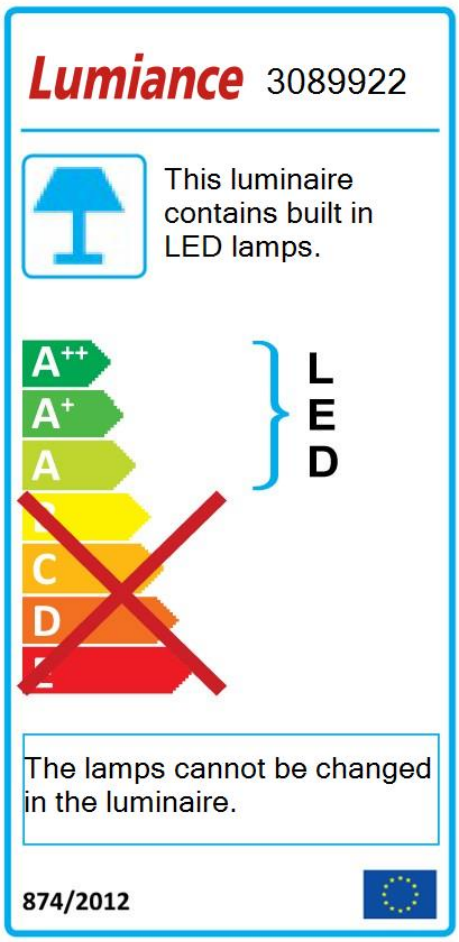

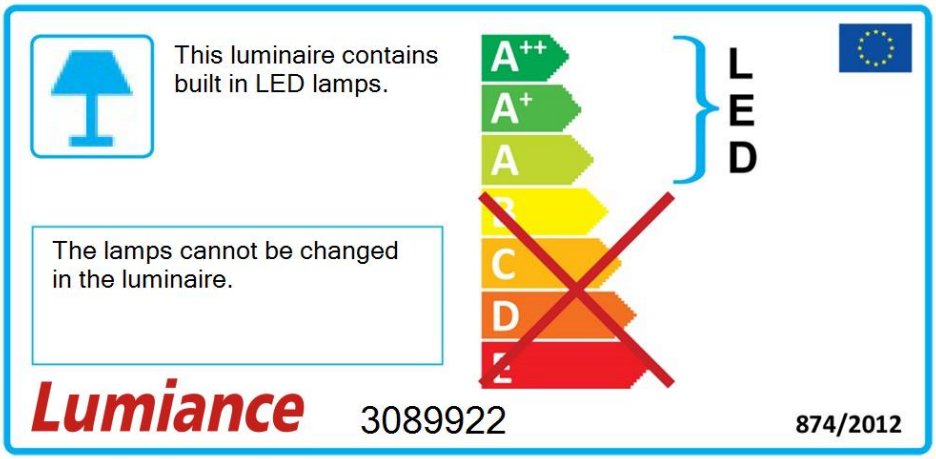

© Feilo Sylvania | Date Printed: 21 Dec 2018