


## Optimo Small - LED

*Optimo Small LED WW LS3 SI*  
3089924



### Product features

- Compact integrated LED spotlight for three circuit track (LS3) with unique 2 tone colour combinations made possible by body and trim concept. The twist and lock bezel design allows for quick and easy replacement of reflectors and / or filter. Die-cast aluminium body, 1,470LM, 16W, 92lm/W, 3000K, Driver Current: 450mA, CRI80, 36° beam angle, Non-dimmable LED driver, IP20, IK02, 50,000 hrs (L70), (HxDxW) 92x100x 55mm, 3 step MacAdam ellipse, 0.8kg, Matt Silver and Matt black, Class 2, 220-240V, energy class: A++, A+, A

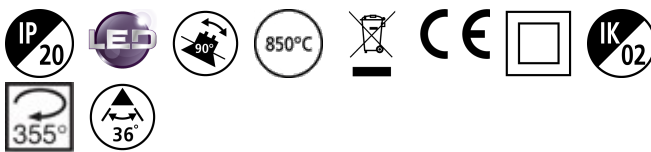

## PRODUCT OVERVIEW

IPC Code	3089924
Product name	Optimo Small LED WW LS3 SI
Technology	LED
Housing	Die cast aluminium
Mount	LS3
Environment	Interior
General application	Retail
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4170087
E-number SE	7416928
Fixture luminous flux (lm)	1470
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	50000
Housing colour	Black/Silver
IP rating	IP20
IK rating	IK02
Product EAN number	8711971899242
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	3089924
----------	---------

## Optimo Small - LED

*Optimo Small LED WW LS3 SI*  
3089924

Product name	Optimo Small LED WW LS3 SI
Technology	LED
Housing	Die cast aluminium
Mount	LS3
Environment	Interior
General application	Retail
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4170087
E-number SE	7416928

### Optical data

Fixture luminous flux (lm)	1470
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	36
Distribution type	Direct
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	16
Equivalent watt (W)	20
Electrical protection	Class II
Control gear type	Electronic
Drive current (mA)	450
Inrush Current (A)	20
Inrush Duration (µs)	400
Glow Wire Test (°C)	850
Max. Luminaires per 16A C Breaker	40

### Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

### Physical data

Vertical Tilt (°)	90
Horizontal rotation (°)	355
Housing colour	Black/Silver
IP rating	IP20
IK rating	IK02
Weight (kg)	0.8

### Packaging







Single packaging type	Carton
Product EAN number	8711971899242

## Optimo Small - LED


Optimo Small LED WW LS3 SI  
3089924

Packaging single length / height (cm)	17.5
Packaging single width (cm)	17.7
Packaging single depth (cm)	17.2
DUN14 (outer)	08711971899242
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	17.7
Packaging outer depth (cm)	17.2


## PHOTOMETRY

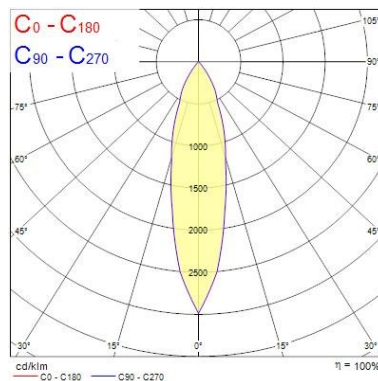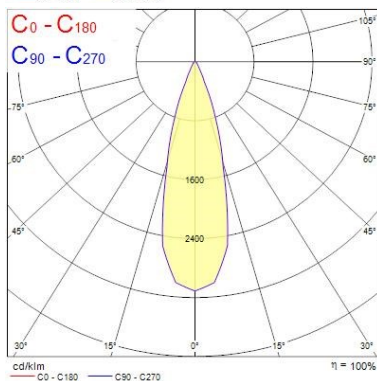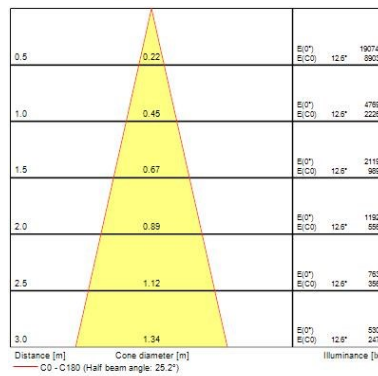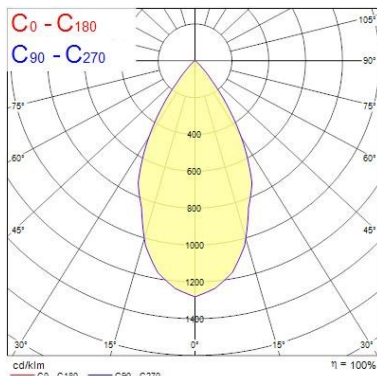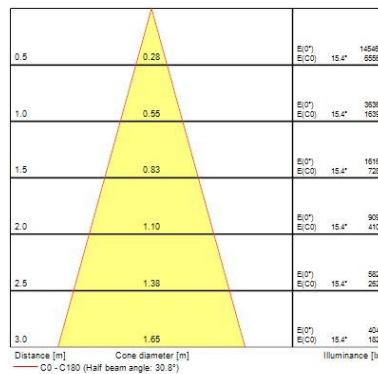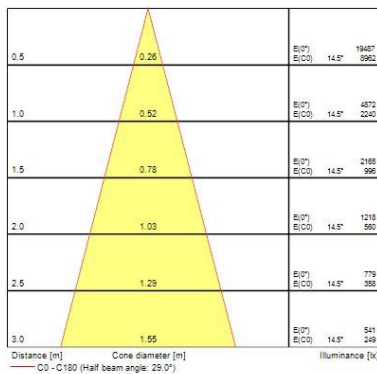

Optimo Small - LED  
Optimo Small LED WW LS3 SI  
3089924

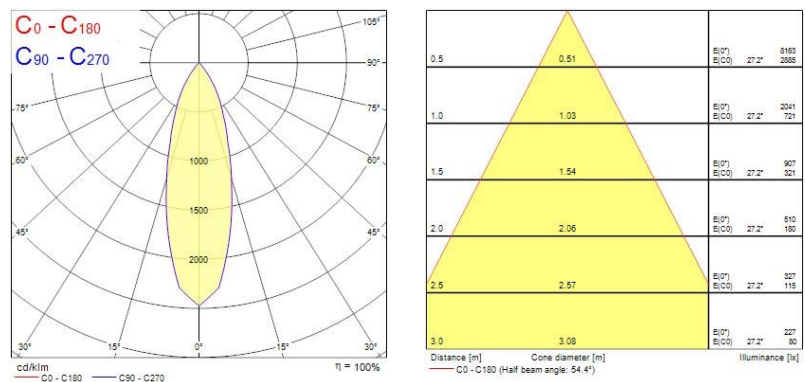

TECHNICAL DRAWINGS



## Optimo Small - LED

*Optimo Small LED WW LS3 SI*  
3089924

