ToLEDo GLS DIMMABLE

ToLEDo GLS V4 DIM FR 1521lm 827 E27 BL

0026649



Product features

- •Compact and elegant design ƒ•1521lm - suitable for replacing 100W incandescent GLS lamp. ƒƒ•85% energy saving compared to incandescent lamp. •ƒƒInstant light at the flick of a switch ƒƒ•Uniform light distribution ƒƒ•Colour temperatures - 2700K ƒƒ•Good colour rendering (CRI 80) ƒƒ•Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas ƒƒ•Lower maintenance costs •A+ energy rating - 101 lm/W •Dimmable on approved dimmers

PRODUCT OVERVIEW

IPC Code	0026649
Product name	ToLEDo GLS V4 DIM FR 1521lm 827 E27 BL
Technology	LED
Watt (Rated) (W)	15
Lamp shape	GLS
Cap/Base	E27
Lamp finish	Frosted
General application	Hospitality,Residential & Consumer
Certifications	EUTIE103
ETIM Class	EC001959
Luminous flux (lm)	1521
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Consistency (SDCM)	6
Wattage (W)	15
Dimmable	Yes
Average life (Nominal) (h)	25000
Product EAN number	5410288266497

DATA TABLE

General data

IPC Code	0026649
Product name	ToLEDo GLS V4 DIM FR 1521lm 827 E27 BL
Technology	LED
Watt (Rated) (W)	15
Lamp shape	GLS
Cap/Base	E27
Lamp finish	Frosted
General application	Hospitality,Residential & Consumer
Certifications	EUTIE103
ETIM Class	EC001959

© Feilo Sylvania | Date Printed: 24 Dec 2018

ToLEDo GLS DIMMABLE

ToLEDo GLS V4 DIM FR 1521lm 827 E27 BL

0026649

Optical data

Luminous flux (lm)	1521
Luminous flux (Rated) (lm)	1521
Colour temperature (K)	2700
Light colour	Homelight
Colour Code	827
CRI (Ra)	80
Colour Consistency (SDCM)	6
Adjustable chromaticity	N
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	15
Equivalent watt (W)	100
Starting time (max) (s)	0.05
Warm-up time to 60% of full light (max) (s)	< 1s => 60%
Mains voltage (V)	220-240V~
Lamp power factor	0.94
Control gear required	No
No. Of switching cycles before premature failures	50000
Transformer required	No
Dimmable	Yes
Drive current (mA)	74
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	16

Lifetime data

Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

Physical data

Max. Lamp Diameter (mm) - D	66
Weight (kg)	0.103

Packaging

Single packaging type	Mix blister(20% carton, 80% pl
Product EAN number	5410288266497
Packaging single length / height (cm)	15.4
Packaging single width (cm)	7.2
Packaging single depth (cm)	19.9
DUN14 (inner)	25410288266491
Units per inner package	6
Packaging inner length / height (cm)	41.5
Packaging inner width (cm)	15.6
Packaging inner depth (cm)	21.4
DUN14 (outer)	15410288266494
Units per outer package	60

© Feilo Sylvania | Date Printed: 24 Dec 2018

ToLEDo GLS DIMMABLE

ToLEDo GLS V4 DIM FR 1521lm 827 E27 BL


0026649

Packaging outer length / height (cm)	66.9
Packaging outer width (cm)	43.6
Packaging outer depth (cm)	47.8

Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Intended purpose	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Suitable for accent lighting	Yes
Safety message	Not Suitable for totally enclosed fixtures

TECHNICAL DRAWINGS




© Feilo Sylvania | Date Printed: 24 Dec 2018

ToLEDo GLS DIMMABLE

ToLEDo GLS V4 DIM FR 1521lm 827 E27 BL

0026649

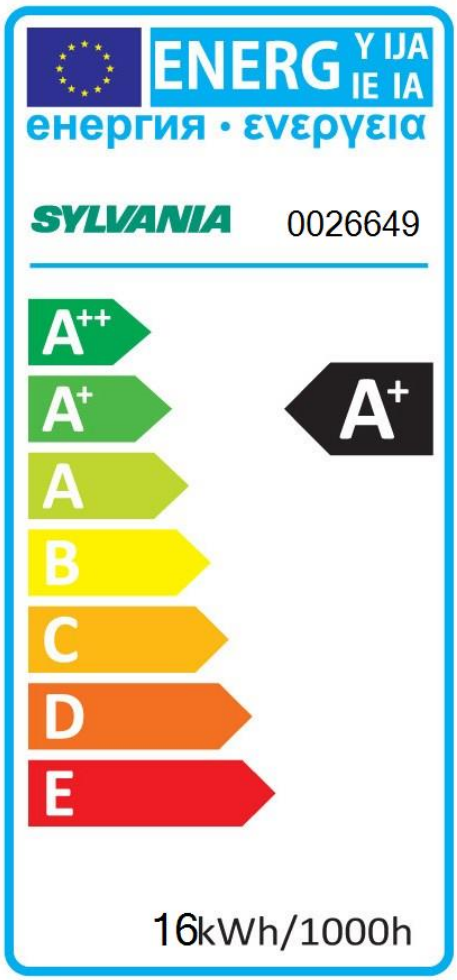

© Feilo Sylvania | Date Printed: 24 Dec 2018