

## Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM S 4K E3 0048619



### Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 2900 lm, 24 W, 120 lm/W, 4000 K, drive current 350 mA, non dimmable, 3 hours emergency, CRI 80, IP65, IK08, Class I, nominal average life (h): 50000, 1278mm x 84mm x 75mm, energy class: A++ A+ A



### PRODUCT OVERVIEW

IPC Code	0048619
Product name	START WATERPROOF LED G3 1200MM S 4K E3
Technology	LED
Housing	Polycarbonate
Mount	Ceiling Mounting and Suspended Mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC002892
Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	120
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Glare control	25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	250
Total power consumption (W)	24
Electrical protection	Class I
Control gear type	Electronic + Emergency
Dimmable	No
LED Flickering Rate	High (>40%)
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288486192
Luminous flux (emergency) (lm)	250
Lamps	Yes
Included lamp	INTEGRATED LED

## Start Waterproof LED G3 Emergency

*START WATERPROOF LED G3 1200MM S 4K E3*

0048619

### DATA TABLE

#### General data

IPC Code	0048619
Product name	START WATERPROOF LED G3 1200MM S 4K E3
Technology	LED
Housing	Polycarbonate
Mount	Ceiling Mounting and Suspended Mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C to +30°C
Certifications	EUNEW002
ETIM Class	EC002892

#### Optical data

Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	120
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Glare control	25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	250
Emergency duration (h)	3

#### Electrical data

Total power consumption (W)	24
Mains voltage (V)	220-240V~
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	16.0
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic + Emergency
Dimmable	No
Drive current (mA)	350
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	High (>40%)

#### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000

## Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM S 4K E3 0048619

Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	59000
Lumen maintenance - L90 B20	53000
Lumen maintenance - L90 B10	50000
Average life (Nominal) (h)	50000

### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1278
Nominal Product Width (mm)	84
Nominal Product Height (mm)	75
Weight (kg)	1.8



### Packaging

Single packaging type	Carton
Product EAN number	5410288486192
Packaging single length / height (cm)	137.2
Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288486192
Units per outer package	1
Packaging outer length / height (cm)	137.2
Packaging outer width (cm)	8.8
Packaging outer depth (cm)	8.4

### Safety data

Dry applications use only	No
---------------------------	----

## PHOTOMETRY

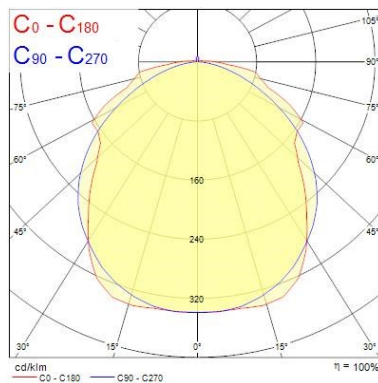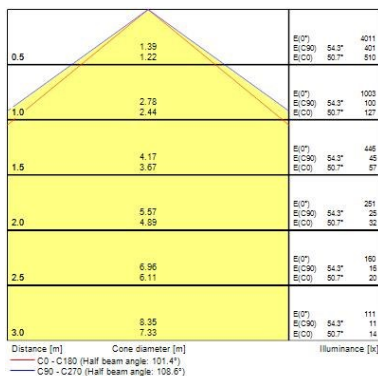


## Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM S 4K E3 0048619

0.5	1.40 1.20	E(0°) E(C90) E(C0)	54.4° 50.3° 46	380 38
1.0	2.79 2.41	E(0°) E(C90) E(C0)	54.4° 50.3° 11	87 9
1.5	4.19 3.61	E(0°) E(C90) E(C0)	54.4° 50.3° 5	39 4
2.0	5.59 4.82	E(0°) E(C90) E(C0)	54.4° 50.3° 3	23 2
2.5	6.98 6.02	E(0°) E(C90) E(C0)	54.4° 50.3° 2	14 1
3.0	8.38 7.23	E(0°) E(C90) E(C0)	54.4° 50.3° 1	10 1

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 100.6°)  
— C90 - C270 (Half beam angle: 106.8°)

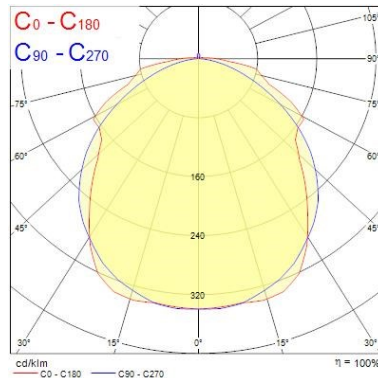

### TECHNICAL DRAWINGS



**SYLVANIA** 0048619

This luminaire contains built in LED lamps.

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

**LED**

The lamps cannot be changed in the luminaire.

874/2012

## Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM S 4K E3 0048619

